

UC-NRLF





LB 276 647

# COAL MINING

—  
*T. C. CANTRILL*


YB 15543

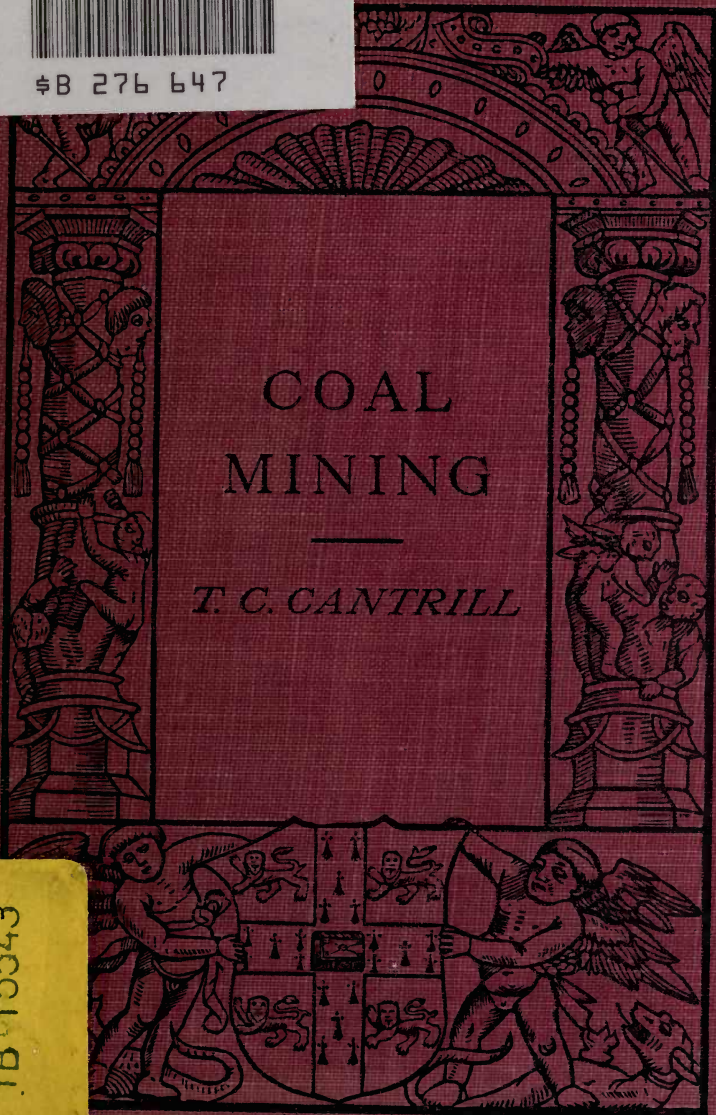

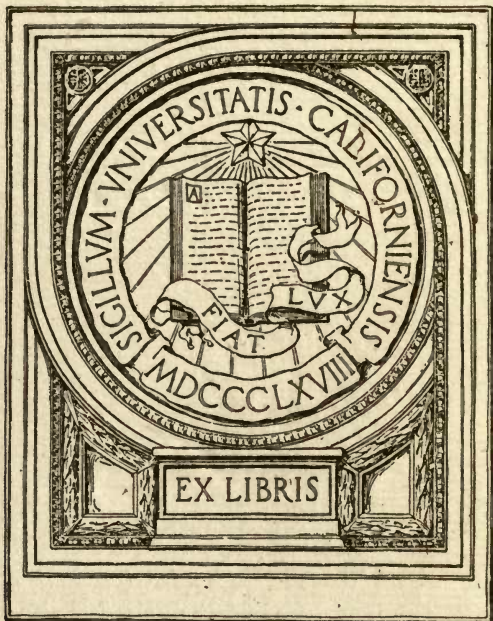

EX LIBRIS

564  
C233

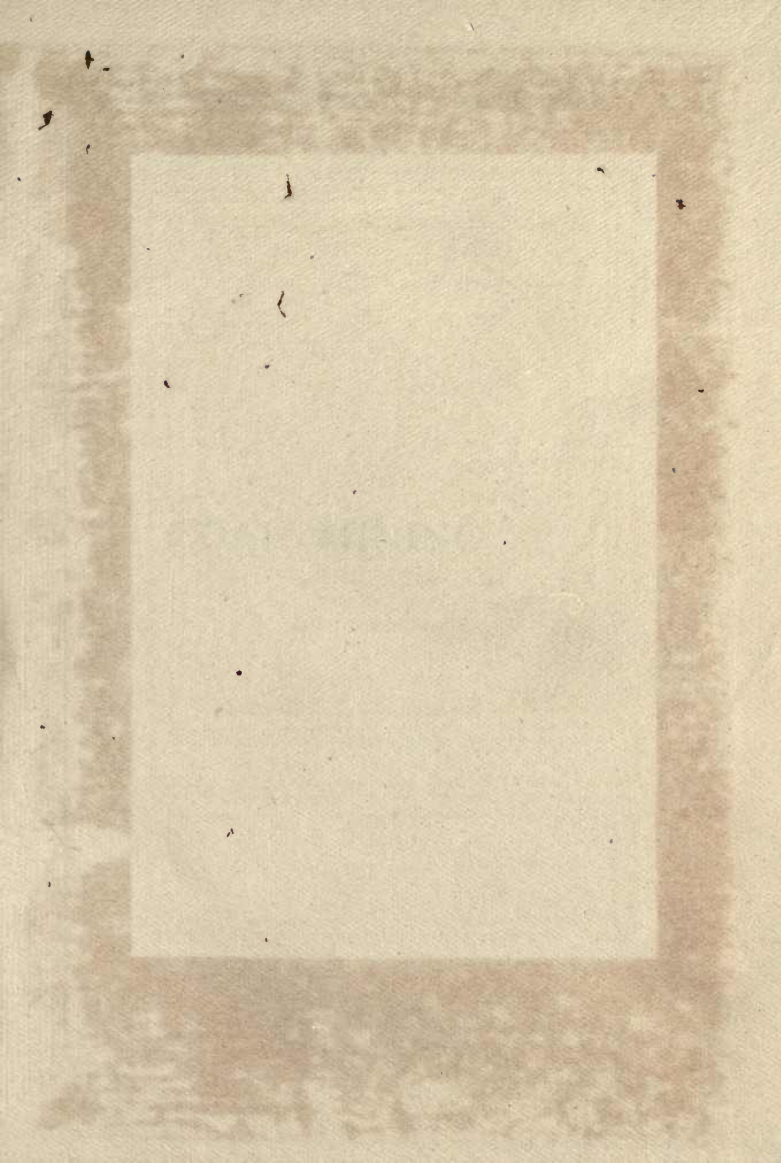



The Cambridge Manuals of Science and  
Literature

CAMBRIDGE UNIVERSITY PRESS  
100 Brook Hill Drive  
West Nyack, New York 10994  
32 Avenue of the Americas  
New York, N.Y. 10013-2473  
477 Williamstown Road  
Port Melbourne, Vic. 3207  
Australia  
Ruiz de Alarcón 13  
28014 Madrid  
Spain  
Dock House, The Waterfront  
Cape Town 8001  
South Africa  
P.O. Box 358, Torrance, Calif. 90509  
U.S.A.



COAL MINING

By  
J. H. COOPER  
The University of Cambridge  
Cambridge  
1962  
First published in 1962  
This book is published by Cambridge University Press  
The Edinburgh Building, Shaftesbury Road, Cambridge CB2 2RU  
32 Avenue of the Americas, New York, N.Y. 10013-2473  
477 Williamstown Road, Port Melbourne, Vic. 3207, Australia  
Ruiz de Alarcón 13, 28014 Madrid, Spain  
Dock House, The Waterfront, Cape Town 8001, South Africa  
Printed in Great Britain by the University Press, Cambridge

CAMBRIDGE UNIVERSITY PRESS

C. F. CLAY, MANAGER

London: FETTER LANE, E.C.

Edinburgh: 100 PRINCES STREET



London: H. K. LEWIS, 136 GOWER STREET, W.C.

London: WILLIAM WESLEY AND SON, 28 ESSEX STREET, STRAND

Berlin: A. ASHER AND CO.

Leipzig: F. A. BROCKHAUS

New York: G. P. PUTNAM'S SONS


Bombay and Calcutta: MACMILLAN AND CO., LTD.

Toronto: J. M. DENT AND SONS, LTD.

Tokyo: THE MARUZEN-KABUSHIKI-KAISHA


*All rights reserved*



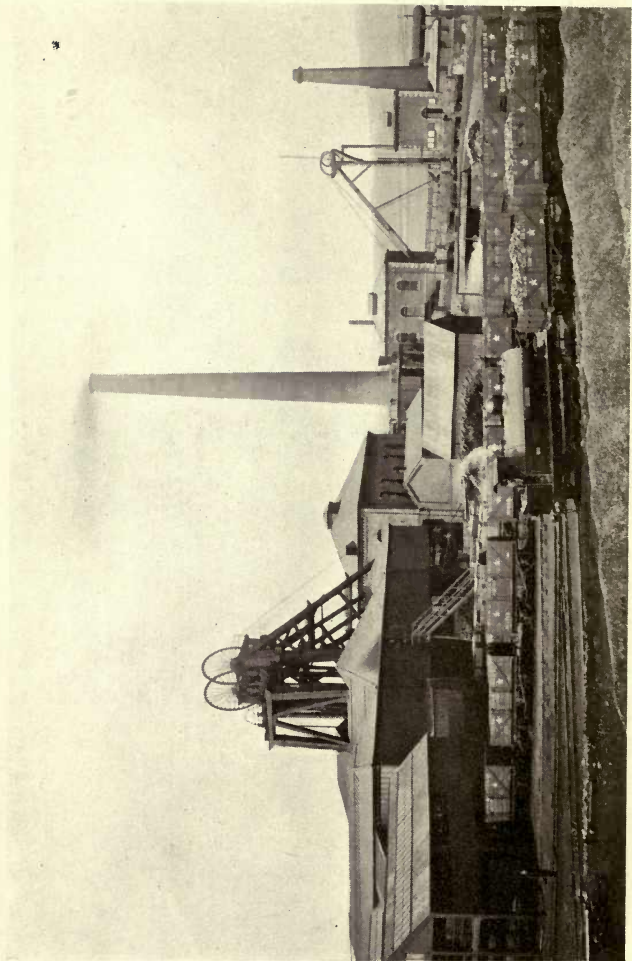

The Alexandra Pit of the Wigan Coal and Iron Co., Ltd., Wigan

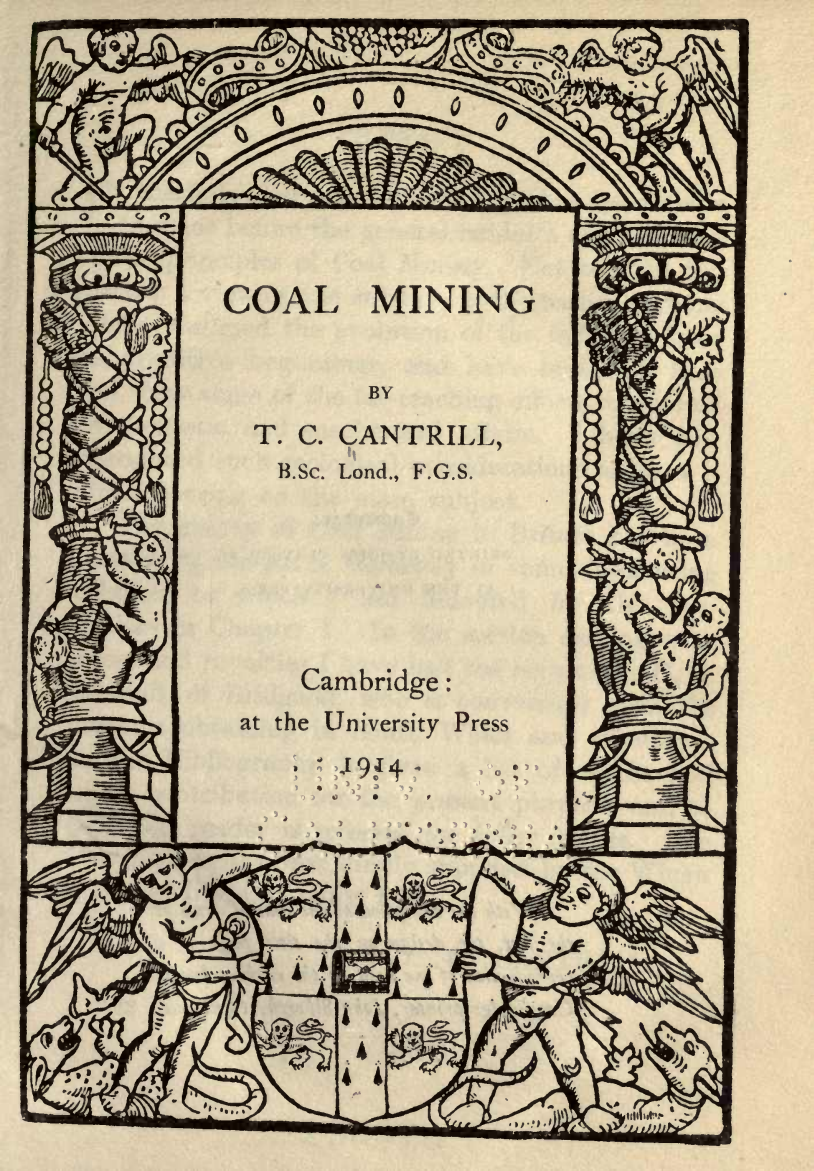

The book cover features a highly decorative border. At the top, two winged cherubs (putti) are shown in profile, one on the left and one on the right, appearing to hold up a decorative arch. Below the arch is a row of stylized, fan-like motifs. The central text is framed by two vertical columns. Each column contains a large, ornate capital letter 'C' that serves as a structural element. The 'C's are decorated with intricate patterns, including what looks like a diamond or lattice design. Between the 'C's, there are smaller figures, possibly cherubs or children, engaged in various activities. The bottom of the cover is also decorated with a row of figures, including two large winged cherubs on the left and right, and several smaller figures, some of which appear to be animals or children. The entire border is rendered in a classic, woodcut-style line art.

# COAL MINING

BY

T. C. CANTRILL,

B.Sc. Lond., F.G.S.

Cambridge:

at the University Press

1914

TN802  
C3


GOAL MINING

C. CAMPBELL

Cambridge:

PRINTED BY JOHN CLAY, M.A.

AT THE UNIVERSITY PRESS



*With the exception of the coat of arms at the foot, the design on the title page is a reproduction of one used by the earliest known Cambridge printer, John Siberch, 1521*

## PREFACE

**I**N the following pages an attempt has been made to place before the general reader a slight sketch of the principles of Coal Mining. Not to take too narrow a view of the subject, in the earlier sections I have outlined the evolution of the industry from its primitive beginnings, and have indicated here and there some of the far-reaching effects it has had on domestic and mechanical affairs. I have also introduced such geological considerations as have a direct bearing on the main subject.

The history of Coal Mining in Britain has been written by Mr R. L. Galloway in some fascinating volumes to which I am indebted for the particulars in Chapter I. In the section dealing with leases and royalties I have had the help of Mr H. J. Randall, of Bridgend, who is conversant with the customs obtaining in South Wales and elsewhere. In the Bibliography is given a list of works laid under contribution for the present purpose, and to them the reader is referred for fuller details. The Frontispiece has been kindly supplied by the Wigan Coal and Iron Company, Ltd.

T. C. CANTRILL.

22 December 1913

PREFACE

In the following pages an attempt has been made to place before the general reader a slight sketch of the principles of Coal Mining. Not to take too narrow a view of the subject in the earlier sections I have outlined the evolution of the industry from its primitive beginnings and have indicated here and there some of the far-reaching effects it has had on domestic and mechanical affairs. I have also introduced such geological considerations as have a direct bearing on the subject.

TO

DANIEL JONES, Esq., J.P.,

OF DONINGTON, ALBRIGHTON, SALOP;

FATHER OF WYRE FOREST GEOLOGY

It is a pleasure to me to have had the help of Mr. H. J. Randall of Bridport, who is conversant with the customs obtaining in South Wales and elsewhere in the Bibliography to give a list of works and to under contribution for the present purpose, and to whom the reader is referred for fuller details. The frontispiece has been kindly supplied by the Wyre Coal and Iron Company, Ltd.

LONDON: T. FISHER & BURNETT, 11, SOUTH BURY PLACE, W. 1907.


## CONTENTS

CHAP.	PAGE
I. INTRODUCTION AND HISTORICAL REVIEW . . .	1
II. VARIETIES, GEOLOGICAL AGE AND ORIGIN OF COAL	37
III. THE COAL MEASURES AND THE COAL-SEAM . . .	52
IV. COALFIELDS, FOLDS AND FAULTS . . . . .	61
V. PROSPECTING AND BORING . . . . .	69
VI. WINNING THE COAL . . . . .	77
VII. WORKING THE COAL . . . . .	95
VIII. VENTILATION, DRAINING AND LIGHTING . . .	109
IX. UNDERGROUND HAULAGE, WINDING, AND SURFACE- ARRANGEMENTS . . . . .	124
X. LEASES AND ROYALTIES, ADMINISTRATION, AND STATE REGULATIONS . . . . .	136
BIBLIOGRAPHY . . . . .	150
INDEX . . . . .	152

## LIST OF ILLUSTRATIONS

	Alexandra Pit, Wigan . . . . .	<i>frontispiece</i>
		PAGE
Fig. 1.	The three stages of mining. (After R. L. Galloway) . . . . .	9
„ 2.	A South Staffordshire horse-gin. (From a Geological Survey Photograph) . . . . .	15
„ 3.	Edge-rail and plate-rail . . . . .	25
„ 4.	Coalfields . . . . .	63
„ 5.	Overthrust faults . . . . .	65
„ 6.	Normal faults . . . . .	66
„ 7.	Methods of winning the coal . . . . .	79
„ 8.	Shafts, main levels and inclines . . . . .	87
„ 9.	Recovering the coal beyond a fault . . . . .	91
„ 10.	Recovering the coal beyond a fault . . . . .	92
„ 11.	'Face' and 'end' . . . . .	97
„ 12.	Bord-and-pillar working. (After C. Pamely) . . . . .	99
„ 13.	Longwall working . . . . .	104
„ 14.	Square-work . . . . .	107
„ 15.	Ventilating levels and bords . . . . .	115
„ 16.	Underground haulage . . . . .	127

*Note.*—The Frontispiece shows, on the left, the screens with the winding-shaft (which is also the downcast air-shaft) behind them. The upcast air-shaft and fan-house are not included in the view. The head-gear on the right belongs to a disused pit to the shallower seams.



## CHAPTER I

### INTRODUCTION AND HISTORICAL REVIEW

*Introduction.*—The intimate dependence of our comfort on a supply of cheap coal was brought home very forcibly to most of us during the strike of April, 1912, when ‘stove-nuts’ were quoted on the London Coal Exchange at 40 shillings the ton. Whether we use the coal itself in our sitting-rooms and kitchens, or warm ourselves, cook our food, and light our rooms with gas, we depend ultimately on the same fuel. Nor do we become independent of it by the adoption of electricity—generated as it is in most cases by steam-power raised by the combustion of coal. Our railways too, whether steam or electric, equally draw their vitality from a regular supply of the same source of energy. With our coal-supply cut off, our water-service, pumped by steam-power from the well to the reservoir, would soon fail us; and worse things would soon befall those towns whose sewage-system depends for its proper working on the assistance of steam.

The vast amount of coal demanded by our various manufactures is not so easily appreciated; but when

we reflect that, summer and winter alike, thousands of furnaces, forges, steam-engines, gas-works and coke-ovens, brick-works and lime-kilns, are devouring the fuel without cessation, while steam-vessels are not only consuming it but are carrying it to all parts of the world for foreign consumption, we gain some notion of the extent and importance of this great British industry.

In the sequel we shall see that the requirements of the coal-trade gave origin to an important series of useful inventions. The first steam-engines were constructed for no other purpose than the pumping of water from the mines; the locomotive was produced in order to convey the coal from the pit to the port of shipment, and with the introduction of iron rails laid the foundation of our present railway-system. In fine, the domestic, the municipal, and the commercial life of modern Britain depends for its very existence on, as it derives its vigour from, the fortunate circumstance that, many millions of years ago, some of the forests and swamps of the Carboniferous period spread across the site of the future Britain.

*Historical Review.*—Though the use of coal or lignite by the smiths of Liguria and Elis (Genoa and Southern Greece) is recorded by Theophrastus about 300 B.C., there is no evidence that the mineral was known in Britain before the Roman occupation. The



abundant supply of timber sufficed for all the needs of the natives, who required no lime in the construction of their primitive dwellings, and smelted their bronze and iron with wood or charcoal. There is little doubt, however, that it was employed to some extent by the Roman colonists, for smith-work and lime-burning. They also employed it for heating-purposes, on occasion, for coal-cinders were found in plenty in the hypocausts at Uriconium (Wroxeter) in Shropshire, and coal or its cinders have been discovered on the sites of many of the forts along the Wall of Hadrian. Their use of it seems however to have been very limited; no Roman remains have been discovered in any of our coal-workings, and though in the north of England they built their military stations close to the outcrops of the coal-seams, the Romans appear to have left the coal practically untouched.

The Saxon and English invaders seem to have known nothing whatever about the mineral. To them wood was the all-sufficing fuel; what little iron they had was smelted with charcoal, and their buildings, with the exception of a few churches, were constructed of timber, and needed no mortar; any lime they used was doubtless burnt with wood. They warmed their halls and their hovels alike with wood and peat, even in districts that abounded with coal. In Domesday Book no mention is made of coal,

though other minerals are alluded to. It could not have been long, however, before the Norman builders of castles and religious houses began to burn their lime and forge their iron with coal, but there is great difficulty in adducing contemporary records as evidence of this, owing to the fact that originally the term 'coal,' or, as formerly spelt, 'cole,' like the Greek *anthrax* and the Latin *carbo*, signified any fuel, generally wood. Unless therefore the document appealed to contains some contextual allusion to a pit, it is impossible to assert that the passage in question refers to the mineral fuel. Similarly the term 'collier' meant at first 'charcoal-burner'; and the 'Wood-collier's Arms' still survives (or did in 1895) as the name of an inn at Bewdley, affording an instance of this usage of the word among the charcoal-burners of the neighbouring Forest of Wyre.

There appears to be no uncertainty however about the records of Holyrood and Newbattle Abbeys, which allude to the digging of coal on the south shores of the Firth of Forth about the year 1200; and early in the reign of Henry III coal began to be gathered along the coast of Northumberland, where it was washed up by the surge from outcrops on the shore, and thus acquired the distinctive name of 'sea-coal'; and what is perhaps the first unequivocal reference to the mineral in England is contained in a grant, to the monks of Newminster

Abbey, by Adam de Camhous, of land on the coast near Blyth, with a road to the shore for the conveyance of sea-weed and sea-coal (*carbo maris*). This was a few years prior to 1236. With regard to the term 'sea-coal,' it is of interest to find that by the time of Henry VIII the origin of the name had become a matter of uncertainty; Leland regarding it as derived from the fact that the mineral was gathered on the shore, while Dr Caius attributed it to the mode in which the coal was conveyed to London.

During the reigns of Henry III and Edward I, coal-digging sprang up in most of the coalfields, but was most active in the great northern coalfield (Northumberland and Durham), owing to the facility with which the mineral could be floated downstream to the coast at Tynemouth. It was not long before it began to be shipped thence to London, where as early as 1228 it appears to have been sold to the lime-burners of Sea-coal Lane (still in existence near Ludgate Circus); and as one William of Plessey had property in Sea-coal Lane in 1253, the village of Plessey (north of Newcastle-on-Tyne) was probably the source of the first coal to reach the metropolis. In 1257-9 ship-loads of sea-coal arrived in London for the smiths—and lime-burners, probably—at work on Westminster Palace. In London the brewers and dyers were using it in 1306,

though it aroused the opposition of the citizens on account of its noisome smoke. Coal was employed by the smiths and lime-burners engaged on the Edwardian castles about 1300, *e.g.* Carnarvon, Beaumaris and Dunstanborough, as can be gathered from contemporary works-accounts; and in 1366-7 some 576 tons of it were brought from Winlaton in Durham county for works at Windsor Castle.

About 1300-25 coal began to be tried in a very shy fashion in the castles, abbeys and better sort of houses; for improvements in architecture carried with them improved chimneys and fireplaces, without which the new fuel, with its rank smoke, could hardly have displaced the less sooty and pungent wood-fire from the central hearth. By the middle of the 14th century the general demand for coal had increased considerably, and as early as 1325 a boat-load of the mineral left Newcastle for Pontoise in France; but this foreign exportation was prohibited in 1362 and 1367, except to Calais.

Up to this time the getting of the coal was not a very arduous business. The mineral no doubt was obtained at first from the actual outcrop, *i.e.* from the tract along which the coal-seam lay immediately below the soil, and could be got by simple quarrying. This method of 'open-work' or 'open-cast' would be specially applicable in those districts where the coals crop out along the steep sides of

hills and valleys (Fig. 1, p. 9). In such situations, moreover, the coal could readily be followed underground from its outcrop, and worked by horizontal tunnels known as 'day-holes' or 'day-levels,' which served the double purpose of affording an exit for the coal and allowing the works to drain themselves. But these modes were less suitable in flatter districts, such as parts of South Staffordshire; and there resort was had to the sinking of 'bell-pits' or 'bee-hive pits.' These were shallow pits sunk through the surface-beds to the desired seam of coal (or of ironstone), upon reaching which the pit was belled-out, and as much of the mineral removed as could be done with safety. The pit was then abandoned, and filled up with refuse from a new pit sunk hard by.

But by the middle of the 14th century opportunities for the application of these simple methods were becoming fewer in the north of England, and we begin to read of pits and water-adits, ropes and windlasses; in fact, coal-mining had entered on the second stage of its evolution, the 'pit-and-adit' stage (Fig. 1, p. 9). The earliest mention of coal-mining implements occurs in an inventory dated 1354 of property belonging to the monks of Finchale (on the Wear), in which are included *ij colpikkes*, *ij yeges ferrei*, i.e. two coal-picks and two iron wedges.

During the latter half of the 14th century the use of coal extended rapidly for all manner of

purposes where wood was employed before. The monks of Holy Island were using it in 1344-7 for warming their hall, their prior's chamber, and their infirmary, as well as in their brew-house and their lime-kiln. It was necessary now to win the coal over areas farther removed from the outcrop, and to follow it down in the direction of the dip. Pits were therefore required for raising the coal; and to allow the workings the benefit of natural or 'free' drainage, long narrow tunnels (adits, soughs, water-gates) were driven up to the workings from the lowest valley-bottom available, an arrangement that also provided the workings with a natural ventilation. The coal was carried to the bottom of the pit, or out of the level, on the backs of boys, girls and women, known as 'bearers,' and was raised to the surface in baskets with hempen ropes and windlasses.

During the 15th century the use of coal was steadily spreading. In London it was taking the place of wood on the hearths of the citizens, and in the maritime regions it was coming into use in the evaporation of sea-water for the manufacture of salt. Mention of water-gates or adits becomes more frequent, indicating that in many districts the pits were being deepened; and towards the end of the century (1486-7) the monks of Finchale had been obliged to set up a pump at their pits, which had apparently passed below the level of natural drainage,

and had entered on the third stage of their evolution, viz. the 'pit' stage (Fig. 1, below), when it became necessary to raise both coal and water by artificial means. In many of the coalfields, however, the 'pit' stage was not reached till the close of the 16th century. The tools used at this time were few and simple: picks and wooden shovels, 'scopes' (probably buckets) and ropes were all that were needed. At

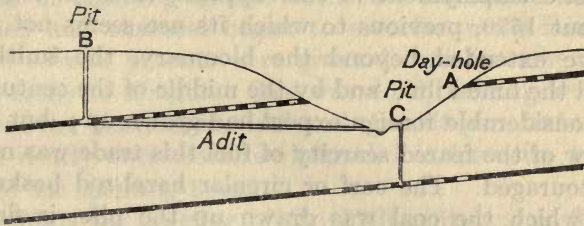


Fig. 1.—Section showing the three stages of coal-mining. *A*, the day-hole or day-level; *B*, the pit-and-adit; *C*, the pit. In the first, no machinery is needed for haulage or drainage; in the second, the coal is raised up the pit by machinery, and the water drains away by the adit; in the third, both coal and water are raised by machinery. (After R. L. Galloway.)

the close of the century the pitmen were still more or less serfs, and in some districts continued so till the reign of Elizabeth, who freed some of her serfs in 1574.

In the 16th century the growing scarcity of wood, which was steadily disappearing into the furnaces of the iron-smelters and salt-makers, gave an impetus

to the use of coal for domestic purposes. This was facilitated by improvements in the construction of fireplaces and chimneys that came in about the middle of the century. Various Acts of Parliament for preserving the woodlands and restraining the activities of the iron-makers were passed in the reigns of Henry VIII and Elizabeth, but with little effect. In the Newcastle district the general domestic employment of coal appears to have begun about 1570, previous to which its use seems not to have extended beyond the bloomery, the smithy and the lime-kiln ; and by the middle of the century a considerable foreign export had grown up ; but in view of the feared scarcity of fuel this trade was not encouraged. The corf or circular hazel-rod basket, in which the coal was drawn up the pits, is first mentioned in 1539 ; it was provided with a wooden bow for attachment to a hook at the end of the rope. This primitive vessel continued in use in some districts for special reasons even as late as 1871 !

About the middle of the 16th century coal was being used largely for salt-making by the monasteries along the coasts of Northumberland and Durham ; and in 1555 we first meet with a reference (in a book by Dr John Caius, one of the founders of Gonville and Caius College, Cambridge) to the noxious vapours given off during the working of the coal ; and the first recorded underground fire burned for some years



at Coleorton in Leicestershire in the reign of Henry VIII. There was still a strong objection on the part of the fine ladies of the metropolis to the domestic use of coal, on account of its sulphurous smoke and smell. It may have been this that prompted the first attempts to make coke; certain it is that John Thornborough, Dean of York, was granted a patent for that purpose in 1590. In this century too the idea of smelting metals with coal instead of with wood and charcoal began to exercise men's minds and several patents were granted, but the schemes all came to nought. Coal was slowly driving wood from the kitchen, the hall and the salt-pan, but not till nearly two centuries later did it force its way into the smelting-house.

With the opening of the 17th century, we find that James I, however much he may have objected to tobacco-smoke, had no prejudices against that of coal, a fuel he used in his own chamber. Coal now came rapidly into general domestic use, except in districts remote from the coalfields, and even there the free use of wood was looked upon as an extravagance. Still, the total vend of the northern ports in 1609 was only 251,764 tons, of which a little over a tenth was sent abroad. In that district fears were already arising that the exhaustion of the mines was not far off, as the water could be kept down only by a continuous and desperate struggle. In 1658 is

first recorded the breaking-in of water from old workings, with fatal results, at Newcastle; and the first noticed death by an explosion of firedamp took place at Gateshead in 1621.

From the beginning of this century various schemes were patented for substituting coal for wood and charcoal in some of the manufactures. One of the first of these had to do with glass-making, which previously had been seated amid the woodlands of Sussex. After repeated failures, Robert Mansell, Vice-Admiral of England, succeeded in establishing the new process at Newcastle-on-Tyne in 1619, and by 1624 the works employed 4000 hands. The impetus thus given to the manufacture of glass soon made itself felt in the increased number of windows introduced into domestic buildings.

It is in the beginning of this century that the practice of boring for coal is first heard of. Boring-rods appear to have been made known in the north of England by one Master Beaumont about 1610, and were used in many cases where it was deemed advisable to prove the ground before sinking a pit. Another notable innovation about the middle of the century was the construction of railways, which had been in use for many years in the mines of Germany. The wooden wheels of the wagons were flanged and ran on wooden rails.

Draining the mines now became the most pressing

care of the proprietors. In many districts the workings were by this time below the level of free drainage, and the mines were dependent on mechanical means for raising the water. Chain-pumps, introduced apparently from Germany, were used about 1670 in the north, and were actuated by horses or water-wheels; they consisted either of an endless chain of buckets similar to the present-day river-dredger, or of a chain of discs passing up a tube, as in the pumps frequently to be seen in our farmyards. By having several special pits of graduated depths, water could by these means be raised from depths of 240 feet. Where the workings had not yet got below the level of free drainage, long adits were cut with the pick at great cost from the lowest valley-bottom available; some of them being several miles long and only 18 inches wide.

At this time the coal was raised by horizontal horse-gins of the 'cog-and-rung' pattern. This machine consisted of a drum or barrel (on which the rope was wound), placed in a horizontal position over the pit-mouth. One end of the barrel was of smaller diameter and built of bars or rungs, with which the upright cogs of a horizontal wheel on a vertical axle were made to engage. This cogged wheel was driven round by a long arm to which the horses were harnessed. The workings were ventilated by the air-currents naturally set up by the

provision of two or more shafts, or a shaft and water-adit.

In 1708 was published the first treatise on coal-mining as practised in the Sunderland and Newcastle districts. In *The Compleat Collier*, the anonymous author, 'F. C.,' has preserved for us a clear picture of the methods in vogue at that time in the north of England. From it we learn that the upper parts of the pits were usually square, 6 feet in the side, but sometimes only 3 or 4 feet, and lined with timber. In wet strata a water-tight lining was employed, resembling the staves of a cask and called tubbing. Pits of 300 or 400 feet were regarded as exceptionally deep; the usual depth was 120 to 180 feet, the cost of such a pit being £55. At the working-places the coal was filled into corves, several of which were then placed on a wooden sledge and dragged by the 'putters' to the bottom of the shaft, then hooked to the rope, and drawn to the surface by the horse-gin. Each corf held about  $4\frac{1}{2}$  cwt., and the hempen rope was about an inch in diameter. The gin now employed for raising coal and water was an improvement on the earlier 'cog-and-rung' gin, and was of the vertical whim-gin pattern (Fig. 2, p. 15). The rope-roll was a large wooden drum, with its axle vertical, and was driven by horses harnessed to long levers. From the drum the rope passed over a pulley in a frame built over the pit-mouth. This

arrangement allowed the use of more horses and a larger drum than in the earlier form of gin, and did not require the mechanism to be erected so close to the pit-mouth. Ventilation was attained by natural currents from one shaft to another, the air being directed along the working face only—a method known as face-airing. The coal was got by the ‘bord-and-pillar’ system (*i.e.* the coal was in part excavated, and in part left as pillars), and in a pit only 360 feet deep more than half the coal was left behind to support the roof. The practice of removing any part of the pillars was evidently unknown in the north in 1708. Thus far ‘F. C.’

Underground fires were very prevalent at

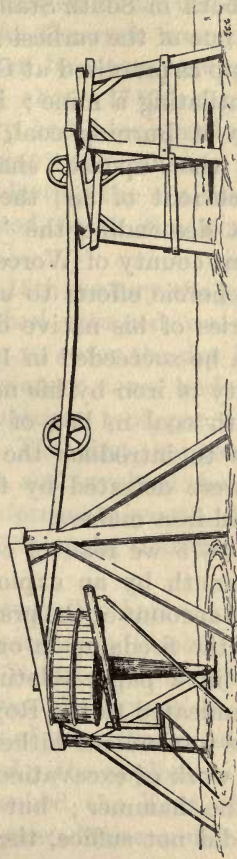


Fig. 2.—A South Staffordshire horse-gin. (From a photograph by John Rhodes, junr., in the Geological Survey Collection of Photographs.)

this period, as at Pensnett Chase and near Wednesbury, both in South Staffordshire. Dr Plot in 1686 makes one of the earliest references to the use of the fire-lamp as practised at Cheadle in the same county for ventilating a mine; it consisted of a large iron brazier of burning coal, suspended in one of the shafts (the 'upcast' shaft), which caused an upward current of air, the corresponding downward current descending the 'downcast' shaft. In the adjacent county of Worcester, Dud Dudley was devoting heroic efforts to unite the coal and the iron industries of his native district of Dudley; but although he succeeded in 1620 in producing a certain quantity of iron by his new method of smelting the ore with coal in lieu of charcoal, his repeated attempts to introduce the process on a commercial scale were defeated by the vested interests of the charcoal-iron makers.

In 1675 we read of colliers being shot out of a pit's mouth by an explosion at Mostyn; and the earliest account of the practice of deliberately setting fire to the firedamp in order to get rid of it is contained in a paper relating to the same place and communicated to the Royal Society in 1677.

The implements hitherto employed by the miner in the work of excavation were the pick, the wedge, and the hammer; but in the rare cases where these did not suffice, the ancient process known as

'fire-setting' was adopted. The rock to be removed was heated with fire and then suddenly cooled with water, with the result that the rock was cracked and fissured, and could then be cleared away with the pick and shovel. But about 1719 gunpowder, which for nearly a century had been employed in the German mines, was adopted in sinking pits in Somerset, though not for blasting the coal itself till 1813, when it was resorted to in the north of England.

At the beginning of the 18th century the greatest depth to which the pits had attained was about 400 feet. They now began to enter the dry belt of strata that underlies the watery zone, and it was not long before serious explosions took place in the fiery northern coalfield. The first happened at Gateshead in October, 1705, and involved the deaths of over 30 people, one unfortunate youth, Robert Broune, being blown up a 67-fathom shaft and flung out of its mouth!

But the event that above all others marks out this period as one of transcendent import to the mining industry—and, as it subsequently proved, to mankind in general—was the invention of the atmospheric engine. Many of the collieries had been drowned out and abandoned; the appliances in use for draining them had reached the limit of their powers; and unless some new device could be hit

upon, it seemed likely that many coal-districts would be compelled to close down. At this juncture Thomas Newcomen, ironmonger, and John Cawley, plumber, of Dartmouth, anabaptists, succeeded in 1710 in giving practical shape to the ideas of Papin and other physicists, who had demonstrated that the pressure of the atmosphere will depress a piston in a cylinder when a vacuum has been produced beneath the piston. The result was the atmospheric or fire-engine, to which at first was assigned no other part than the pumping of mines. Newcomen carried out the idea by filling a vertical cylinder (open at the upper end) with low-pressure steam led from a boiler, then condensing the steam in the cylinder by an injection of cold water, and allowing the resultant atmospheric pressure to push down the piston. The piston was attached by a chain to one end of a horizontal beam (a giant pump-handle, in fact), pivoted at the middle, to the other end of which was attached the pump-rod, which was weighted sufficiently to raise the piston after its downward stroke. But as Thomas Savery had already secured a patent (from 1699 to 1734) for raising water from mines by the agency of fire, Newcomen's engine had to be produced under Savery's patent, though the two machines had nothing in common. By Savery's machine—a sort of 'pulsometer pump'—water could be raised some



26 feet by suction (produced by the condensation of steam), and then forced up a further 64 feet by the action of high-pressure steam applied directly to the water. So far however as draining mines was concerned, the affair proved worthless. Several were erected that served to supply gentlemen's mansions with water, but the only one that essayed to drain a flooded pit (near Wednesbury in South Staffordshire) tore itself to pieces !

The first of Newcomen's engines was erected in 1712 near Walsall in South Staffordshire ; and another, built about 1713 at Griff, near Nuneaton in Warwickshire, at once saved £650 a year in the cost of horses. Thenceforward the employment of Newcomen's engines for pumping mines rapidly extended into other coalfields—particularly where water was not available for driving water-wheels and chain-pumps—and rendered it possible to work coal-seams previously 'drowned.'

In the middle of the 18th century iron was still scarce, and entered to quite a small extent into the construction of the fire-engines, railways and winding-gear of the collieries ; the engines were built of copper, brass and lead ; wooden rails (as the name implies) were used on the railways, and the winding-ropes were of hemp. But at last the grand alliance between the coal and the iron industries was brought about at the furnaces of Coalbrookdale Foundry in

Shropshire somewhere about 1730, and the dreams of Dud Dudley were at length realized: iron was smelted on a commercial scale with coal. Yet so quietly was this revolution brought about that the actual date seems to have escaped all record; but it is probable that Abraham Darby began to employ coke at Coalbrookdale between 1730 and 1735, and at first may have used it mixed with charcoal, a fuel that had not wholly been abandoned there in 1803. Under the influence of the new process a rapid revival of the iron industry set in; the cheapened metal soon made its way to the collieries, and was adopted for their equipment and machinery; and a large number of fire-engines with iron cylinders cast at Coalbrookdale were built between 1750 and 1775 in all parts of the country.

About the middle of the century the deepening of the collieries, rendered possible by the improved methods of drainage by the new atmospheric engines, gave rise to several fresh difficulties. The raising of the coal by the old horse-gins was becoming a tedious business; underground haulage was growing more and more costly, now that the workings were carried to greater distances from the shafts; and the standard of ventilation that had obtained hitherto was proving inadequate for the more extensive, drier, and fiery workings now being dealt with. In spite of improvements the horse-gins were still inefficient;

and Michael Meinzie about 1750 introduced the balance-tub, an arrangement whereby the descent of a bucket of water was made to raise the coal up the shaft. But this plan could usefully be adopted only where the water thus carried into the workings could drain away by an adit. The same principle underlay his self-acting inclined planes, which enabled the full tubs to pull the empties up the underground inclines. Carriages drawn along wooden railways by horses now began to be substituted in the workings for the sledges dragged by boys. Instead of the whole of the air-current being carried past the face where the coal was being worked ('face-airing'), it was now directed, by an arrangement of trap-doors and stoppings, through every part of the excavations—a system known as 'coursing the air.' In order to avoid explosions, the working-places in the fiery mines of the north now began to be illuminated with the steel-mill, invented by Carlisle Spedding of Whitehaven about 1750. The machine consisted of a small disc of steel which by suitable gearing could be rotated rapidly by hand against a piece of flint, and so caused to emit a stream of luminous sparks. Unfortunately it was not till after a number of explosions had occurred that the steel-mill was found to be not much safer than the tallow candle. In 1753 cast-iron flanged wagon-wheels began to be substituted for the wooden ones, and in 1767 plates

of the same material were used in the Coalbrookdale district to arm the wooden rails.

A great step forward in the evolution of the atmospheric engine was taken in 1769 when James Watt introduced the separate condenser and other improvements, and applied them to the Newcomen engines, in which the cylinder, as we have seen (p. 18), was originally used as cylinder and as condenser in turn, an arrangement involving great loss of steam and waste of fuel. The simpler engines on Newcomen's original model continued in use, however, for draining coal-mines, where suitable fuel was cheap. Watt's engine was moreover still a single-acting low-pressure atmospheric engine. Attempts to adapt it to the raising of the coal met with little success; and this work continued to be performed in most districts by horse-gins of horizontal or of vertical patterns up to 1777. But about this time water-wheels began to be employed for raising the coal, especially where natural streams were available. One pattern had a double set of buckets opening in opposite directions around the periphery, so that the motion could be reversed when the full corves reached the top of the shaft. Such a wheel was erected by Smeaton at Griff near Nuneaton about 1774 for drawing coal and water. Where a natural stream was not available, an atmospheric engine was in some cases actually employed to pump water up to a

cistern for the special purpose of supplying the water-wheel ! But soon afterward (in 1779) Matthew Wasbrough of Bristol patented an atmospheric engine designed to produce rotary motion from a reciprocating one by means of ratchet-wheels with the addition of a fly-wheel ; but the mechanism frequently getting out of order, Watt introduced the simple device of the crank. It is said that this idea was pirated by one of Wasbrough's party ; certain it is that much to Watt's annoyance it was patented by one James Pickard of Birmingham in 1780, with the result that to obtain his rotary motion Watt fell back on the sun-and-planet mechanism. The engine was still a single-acting low-pressure engine ; but in 1782 Watt once more came forward with one of his masterly inventions by arranging to produce a vacuum alternately above and below the piston, and so made it double-acting and capable of working equally well in both directions ; at last the piston could push as well as pull ; and later, by excluding the atmospheric pressure entirely, Watt converted the atmospheric engine into the low-pressure condensing steam-engine. At once it entered upon a wider field of application, though curiously enough it still retained, even when applied to widely different ends, the badge of its original servitude, viz. the pump-handle or beam.

The production of iron with coal-fuel at Coalbrookdale had led to the erection of numerous

blast-furnaces in other coalfields, so that the metal soon became plentiful; and by 1788, out of the year's total make of 68,300 tons of iron, the coke-made metal accounted for 53,800, Shropshire leading with 23,100 tons from 21 furnaces. It was natural that the first iron railways should have been made about this time in Shropshire. Cast-iron tubing for lining the shafts was now introduced, and a number of other improvements in mining practice mark the last decade of the 18th century. Atmospheric engines were used to raise the coal; a general substitution of iron for wood on the surface-railways took place; and self-acting inclined planes were installed both above and below ground. Underground railways of wood became general, on which a wheeled rolley or carriage capable of holding several corves was drawn by a horse. The practice of leaving larger pillars with a view to a second working began to be adopted, as up to this time, in the deep pits on the Tyne, 45½ per cent. was the greatest quantity of coal thought to be obtainable. A most important invention was made at this time by John Curr of Sheffield, who in 1788 introduced 'guides,' *i.e.* wooden grooves, carried up each side of the shaft, for the reception of the ends of the cross-bar to which the loaded carriages were suspended. In this way he secured smoothness and freedom from collision during the winding. He next introduced, both above and

below ground, light cast-iron railways of the plate-rail type, *i.e.* having the flange on the rail and not on the wheel (Fig. 3, below). He invented the flat rope also, which could be rolled upon itself like a Catherine-wheel, and so made to equalize the work of the winding-engine.

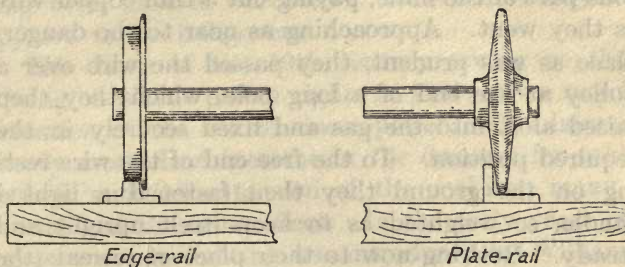


Fig. 3.—Edge-rail and plate-rail. In the first, the wheel is flanged and runs on the edge of the rail; in the second, the wheel is not flanged, but runs on a flanged plate. Our modern railways and tramways are of the edge-rail type.

In the South Staffordshire Thick or Ten-yard Seam, which on account of its liability to spontaneous combustion was worked with a minimum of ventilation, the inflammable gas was even at this time (1798) got rid of by the process of 'firing' or deliberately exploding it. The operation, a somewhat hazardous and exciting one, was carried out by the 'firemen,' who obtained their title from being told off to do this special work. At Lord Dudley's

pits at Netherton it was the practice to fire the gas three times a day. The *modus operandi* was as follows. The place in which the gas had accumulated having been ascertained beforehand, the firemen proceeded from some distant side-chamber (usually the underground stables) toward the gaseous part of the mine, paying out a thin copper wire as they went. Approaching as near to the danger-place as was prudent, they passed the wire over a pulley at the end of a long pole, which they then raised aloft into the gas and fixed securely in the required position. To the free end of the wire resting on the ground they then fastened a lighted candle, so weighted as to keep itself upright and steady. Retiring now to their place of retreat (the stables), they barricaded themselves in, and began hauling-in the wire. This raised the candle at the other end into the gas, which exploded with great violence. The excitement arose when from some unforeseen cause the explosion failed to come off, so that the firemen, like boys with a toy cannon, were faced with the alternative of venturing out to investigate, and possibly to be caught by the explosion, or of remaining prisoners in their own castle.

At Whitehaven, Carlisle Spedding tapped the gas issuing from fissures in the coal and conducted it in pipes to the surface; he even proposed to light the town with it, but doubtless the worthy citizens



were shy of having any dealings with such a dangerous illuminant.

In 1794 the 'longwall' way of working the coal, by which all of it was removed at one operation and no pillars left, was being applied to some of the thin seams in the Cumberland coalfield, though it had long been used in Shropshire, to which county it appears to be indigenous.

The dawn of the 19th century, owing to the lapsing of Watt's patent rights in 1800, saw a rapid extension of the use of steam-power. This immediately created an increase in the demand for coal as fuel, and the extension of the coal-iron manufacture had the same effect. In the early years of the century gas-lighting was introduced by William Murdoch at Boulton and Watt's works at Soho, Birmingham, in 1802, and by F. A. Winsor in London shortly afterward, thus making a new call on the coalfields. In 1800 the estimated coal-output of the United Kingdom was 10 million tons.

The most notable improvements, connected with the collieries, that mark the early part of the century are concerned with traction. Cast-iron railways both above and below ground came in rapidly in the colliery-districts, though at first horses still supplied the motive-power; wrought-iron rails did not become usual till 1820 or thereabout. Steam-engines for pumping and winding were becoming general, and

stationary engines were being set up for drawing wagons up inclined railways by means of ropes. But the improvement that ranks highest at this time was made by Richard Trevithick, who simplified Watt's engine by getting rid of its condenser and supplying it with high-pressure steam, and thus converted it into the high-pressure non-condensing engine, or 'puffer.' Already Murdoch in 1784 had constructed a model locomotive engine, but carried the idea no farther. In 1802 Trevithick, in association with Andrew Vivian, patented certain improvements in the steam-engine and their application to the propulsion of carriages, and in 1803-4 built at Pen-y-daren near Merthyr Tydfil a locomotive that successfully drew 5 wagons carrying 10 tons of iron and 70 men a distance of 9 miles, though the strength of the permanent way proved insufficient to bear the load. But Trevithick somehow failed to popularize his engines, either in South Wales or in the north of England; and although in 1812 John Blenkinsop, by discarding horse-traction in favour of engines of his own design, had been able, at Leeds, to reduce the cost of haulage to one-sixth of its previous figure, it was not till 1829 that Robert Stephenson, by a happy combination of improvements introduced by others, built the Rocket and placed the locomotive-engine on a sound commercial footing.

At this time the ventilation of the mines continued to be produced by fire-lamps, or by furnaces placed at the bottom of the upcast shaft; and in fiery places in the workings, light was still obtained from the steel-mill. But a long list of explosions in the north marks the beginning of the 19th century, and shows that the ventilation was inefficient, and the steel-mill—and even the ventilating-furnace itself—a source of danger. The great problem of the time was: how to work the mines without risk of explosion. In some cases the gas was carried in pipes to the surface and burnt there; and in 1805 James Ryan proposed by taking advantage of the low specific gravity of the gas to drain it off by special passages; and in 1808 he successfully applied his system to the Netherton Colliery near Dudley.

Another difficulty that had to be contended with, especially in the deep pits of the north, was 'creep.' This phenomenon consists of a bulging-up of the floor of the excavated passages, and its ultimate coalescence with the roof. It arises where the pillars of coal left to support the roof are of insufficient size in proportion to the passages, so that the whole weight of the overlying strata, being thrown on to supports too small to carry it, forces the pillars downward into the floor-strata—usually soft and yielding—with the result that these buckle upward wherever free to do so. At the same time the pillars

themselves are frequently crushed, the coal therein spoilt, and the workings thrown into a state of dangerous insecurity. And as creep set up at one spot necessarily throws more weight on adjacent pillars, the disease is apt to spread rapidly throughout the whole colliery. To guard against this disaster, John Buddle, junr. in 1810 introduced 'panel-work,' *i.e.* the laying-out of the workings in districts or panels (? like the panels on a door), of 30 acres or more, separated by wide barriers of solid coal 40 to 60 yards wide. Thus if crush and creep appeared in one panel, they might be prevented from spreading into those adjacent.

While developing the system of panel-working at Wallsend, Buddle introduced his compound or 'split-air' method of ventilation. Instead of the whole current from the downcast shaft being carried along every passage in the mine (a distance in some cases of 30 miles), he divided it at the bottom of the shaft into two or more currents, each of which traversed only one panel. But though Buddle's method, which still remains the most efficient system of air-distribution, did much to render the atmosphere of the mine safer and more wholesome, it was powerless to prevent risk of explosion from sudden discharges ('blowers') of gas, either from old workings or from fissures in the coal itself, so long as naked lights were employed.

At this juncture Dr Clanny of Sunderland devised a lamp that could be used in an explosive atmosphere without firing it, but the instrument was not convenient for practical purposes. About the same time an explosion near Jarrow in 1812 determined the incumbent of the parish, the Rev. John Hodgson, to employ his pen in bringing the facts before the general public. This led a London barrister, J. J. Wilkinson, to form a society for the prevention of accidents in coal-mines, and in 1815 this body obtained the help of Sir Humphry Davy in the matter. That philosopher discovered that a lamp furnished with sufficiently small air-holes would not communicate flame to an explosive mixture outside; and finally he produced the wire-gauze lamp, the "metallic tissue permeable to light and air and impermeable to flame." Davy nobly refused to patent his invention, preferring not to enhance the cost of an instrument designed to preserve the life of man. His safety-lamp not only did this, but also enabled immense quantities of coal to be got that otherwise would have been, and actually had been, abandoned; and by the removal of the pillars, rendered possible by the Davy-lamp, 80 per cent. of the coal could now be got out.

In the first quarter of the 19th century the shafts in the north varied from 6 to 15 feet in diameter; and at Monkwearmouth had attained a depth of

1590 feet, the cost of a single shaft in some cases reaching as much as £40,000. In Wales and the Forest of Dene, on account of the depths of the valleys, free natural drainage was still available even in 1835. By 1827 Shropshire had been outstripped by both Staffordshire and South Wales in the make of pig-iron, the latter leading with 272,000 tons, while Staffordshire produced 216,000 and Shropshire only 78,000, in a total for the United Kingdom of 690,000 tons; and in 1828 the last of the charcoal-iron furnaces of Sussex (that at Ashburnham) was dismantled.

The next notable advance in colliery engineering was made by T. Y. Hall of Ryton-on-Tyne, who after various unsuccessful attempts at improving the methods of winding, introduced in 1835 the two-decked iron cage travelling between guide-rods and accommodating two iron tubs on wheels. Thus was initiated the modern system of winding; and the old corf or basket, which had been in use from time immemorial, was rapidly abandoned, with the curious result that the price of hazel-nuts in the London market was at once and permanently lowered.

Explosions, due generally to 'blowers' locally overpowering the ventilation, were still frequent in the deep and fiery mines of the north, and what was probably the last explosion to blow human bodies from the shaft-bottom to the surface took place in

1817 at the Row Pit (480 feet deep) at Harraton in the Durham coalfield. Davy-lamps gradually came into use between 1817 and 1835, though the extended application of gunpowder in breaking-down the coal-face rendered their employment no safeguard, as the gas would fire by the blast of the explosive just as readily as at a naked candle. Improvements in ventilation at this time took the form of an increase in the volume of air. In the north, underground furnaces were general, but in many of the Midland pits the fire-lamp was still in vogue, wherever natural ventilation did not suffice. But in 1835 John Martin made the fruitful proposal to employ a fan in place of the furnace, a suggestion that ultimately revolutionized entirely the system of mine-ventilation.

In 1835 a committee of the House of Commons, after an enquiry into the management of coal-mines, made certain recommendations for the avoidance of accidents. While Government inspection and regulative enactments were not considered desirable, brattices (brick or wooden partitions) in ventilating-shafts were condemned, and the keeping of maps and plans was thought worthy of encouragement. George Stephenson however went so far as to consider that the sinking of two shafts should be made compulsory.

By the commencement of the Victorian era the coal and iron industries had fairly entered the

modern period ; the main lines of practice had been already laid down, and subsequent improvements have been for the most part matters of detail. Certain exceptions however call for mention. The risks of explosion at the ventilating-furnace itself had led to numerous proposals for substituting some safer method of producing the air-current ; and in 1828 a Mr Stewart successfully installed a system of steam-jet ventilation at Hendre-forgan near Swansea by discharging a jet of high-pressure steam at the bottom of the upcast shaft ; and for a while a brisk controversy ensued between the upholders of the furnace and the advocates of the steam-jet as the more efficient ventilator. But a rival to both these methods, and one destined to outstrip them, was rapidly coming to the front. In 1837 William Fourness of Leeds brought out an exhausting-fan on the winnowing-fan principle ; and in 1844, by producing a machine capable of exhausting 13,500 cubic feet of air per minute, successfully inaugurated the modern system of ventilation.

A most important improvement in the winding arrangements was rendered available in 1839, when Andrew Smith patented his iron-wire ropes ; and from 1840 onward they came rapidly into use in the northern mines, where previously ropes of hemp, usually flat, and rolled Catherine-wheel fashion, but occasionally round, had been employed in general. The



great weight of the hempen ropes had led in some cases to their being woven taper-wise, as at Monkwearmouth, in 1837, when a new flat rope, 600 yards long,  $8\frac{1}{2}$  inches broad at the top, and narrowing to  $5\frac{1}{2}$  inches at the bottom, was set up at a cost of £300, with a prospect of its lasting little more than a twelvemonth. In the shallower pits of Shropshire and South Staffordshire, iron chains were usual during the first half of the 19th century; and although their clank and rattle are heard no longer, they may still be seen in the vicinity of the pits, serving the useful purpose of fencing.

About 1850 the double-cylinder engine, without a fly-wheel, was introduced for winding and haulage purposes; and about this period various devices were patented for the prevention of 'over-winding' (*i.e.* pulling the cage up into the framework over the shaft), and for stopping the fall of the cage, should the rope break. Underground, the old and cumbersome practice of conveying several tubs on a wheeled carriage or roley along the main roads began to be given up about 1841-2 in favour of trains of tubs running on their own wheels along malleable iron edge-rails.

Patent fuels began to receive attention about 1838, the object being to utilize small coal by binding it together with some such material as coal-tar and moulding the mixture into bricks that could be used

as fuel. It has long been the practice among the South Welsh country-folk to turn to account the local culm or fine slack by mixing it with clay or lime into a coherent mass capable of being moulded by hand into 'balls'—a fuel certainly more pleasant for kitchen consumption than that manufactured at Westminster about 1819 by one Chabauner, in which a principal ingredient was the sweepings of the streets!

During the latter half of the 19th century many improvements were introduced, some of which will be described in the following pages, such as the modern methods of boring and shaft-sinking, coal-cutting by machinery, and new forms of safety-lamps; but these are concerned chiefly with the mechanical and engineering departments of coal-mining. The most striking innovation of recent years is the application of electricity in the departments of hauling, pumping, winding, coal-cutting, lighting, signalling, drilling, and shot-firing. As a form of energy it is easily conducted by wire to all parts of the mine, and in this way is much more easily installed than compressed air, which is sometimes used as a motive-power. Electricity, however, has the drawback of being a source of some danger from sparking, with the attendant risk of firing the gas, and is not free from the liability of giving fatal shocks to the workmen.

Having now sketched the evolution of mining-processes from the earliest times, we shall next proceed to a description of the operations as practised at the present day, prefacing that description with such geological observations as are necessary for a proper understanding of the various methods of working the coal.

## CHAPTER II

### VARIETIES, GEOLOGICAL AGE AND ORIGIN OF COAL

SINCE the natural history of coal has been treated of in another volume of this series, a brief summary alone will be attempted here.

*Varieties of Coal.*—The term coal as used to-day covers a variety of substances differing greatly in physical and chemical properties, in their ages, and modes of formation. But all coal-seams are in the last resort beds of ancient vegetable matter more or less chemically altered, composed chiefly of hydrocarbons (compounds of hydrogen and carbon), and suitable for use as fuel. The common varieties of coal are Lignite, Brown Coal, Cannel Coal, Coking Coal, Gas Coal, House Coal, Steam Coal, and Anthracite. Very closely in the order here adopted they

diverge gradually in their chemical, and largely in their physical, properties from Peat, the recent vegetable accumulation of our swamps and moorlands, and approach in character the Graphite of which pencils are made. It must not be inferred from this, however, that all coal originated as peat, and will ultimately be converted into anthracite or graphite as the final result of metamorphic processes (p. 51).

In Lignite the woody constituents are so little altered that their form and structure are usually discernible; while leaves, bark, and other tissues are often well-preserved. Lignite is brown to pitch-black in colour and burns easily, emitting a smoky flame and an unpleasant odour. In the Brown Coals the woody constituents are not obvious to the eye. Cannel Coal is black or brownish in colour, dull and lustreless, clean to the fingers, and can be carved into ornaments. The choir of Lichfield cathedral was formerly paved with squares of cannel obtained probably from a seam in Beaudesert Park near Rugeley. It can be ignited with ease on the application of a burning match, and burns with a smoky yellow flame like that of a candle—hence its name. It is specially valued for making gas, a ton of Wigan cannel yielding over 14,000 cubic feet of gas of 39 candle-power. The House Coals, familiar to us all, are generally more or less lustrous, dirty to the

fingers, and tend to split along the bedding-planes, and also to break crossways along joints usually at right angles to each other. Traces of the original vegetable matter are as a rule not easily seen with the naked eye; but if a piece be broken across it will be found to consist usually of alternating dull and bright layers.

The Steam Coals are nearly devoid of lustre, slow to ignite, evolve little gas or smoke while burning, but give out an intense heat—hence their value for generating steam-power, and their importance from a naval point of view. The best steam coal is obtained from the South Wales coalfield. Anthracite or Stone Coal is, next to graphite, the purest form of natural carbon obtainable—except of course the diamond. It has a brilliant lustre resembling that of graphite, is clean to the touch, and is harder, denser and more brittle than ordinary house coal; it is difficult to ignite, burns slowly, makes little ash, gives off no smoke, but burns with the blue lambent flame of carbon monoxide. In this country it is obtained almost wholly from the north-western and western districts of the South Wales coalfield and from the southern Irish coalfields. A good anthracite contains as much as 95 per cent. of carbon. It is largely used for hop-drying and malting.

*Behaviour during Combustion.*—In their mode of burning, coals can be grouped as (1) caking coals,

and (2) dry, free-burning or non-caking coals. Those of the first group partially fuse and cake together, and at first emit much flame and smoke, and extrude bubbles of tarry matter and hissing jets of gas ; but after these volatile matters have been burnt off, combustion slackens and in an inadequate draught comes to a standstill, leaving in the grate a dead accumulation of unconsumed coke. Their property of caking, however, gives these coals their value as a source of coke, as the small coal and slack not suitable for household purposes can so be utilized. The non-caking coals burn freely, leaving no coke or cinder, and evolve no tarry matter. Some house coals, *e.g.* from the Durham coalfield, are caking ; while others, as most of those from South Staffordshire, are free-burning.

*Suitability.*—The suitability of a coal for any particular purpose depends chiefly on its behaviour during combustion, its hardness, and its chemical composition. A soft coal is wasteful, as in its passage from the pit to the place of consumption it produces much small coal and dust, for which little use can be found. Sulphur (in the form of iron pyrite, ‘brasses,’  $\text{FeS}_2$ ) is usually detrimental ; a pyritous coal during combustion evolves sulphur dioxide ( $\text{SO}_2$ ), a pungent gas that not only offends the nostrils but also attacks metals, such as the bars of grates and furnaces and the plates of boilers. Lumps of iron pyrite are seldom

allowed to get as far as the coal-scuttle, but the mineral may often be seen as a thin brassy film on the joint-faces of some of the pieces of coal. Pyrite is particularly objectionable in a gas-coal, owing to the vitiating effect of the resultant gas, when burnt, on the atmosphere of the dwelling-room ; moreover, it sometimes contains a dangerous amount of arsenic, which renders pyritiferous coals unsuitable for hop-drying and malting.

*Geological Age of Coals.*—The geological age of coals is a matter of considerable practical importance. In the British Isles our coals are referable to the Oligocene, the Jurassic, and the Carboniferous systems. The Lignite of Bovey Tracey in Devon is of Oligocene age ; the coals found on the Yorkshire coast, at Brora in Sutherland, and at Kimeridge in Dorset, are all of Jurassic age. But none of these is of much economic value outside its own immediate district ; and, in this country, when we speak of coal, we mean Carboniferous coal, that is, coal found in the Carboniferous systems of rocks, and especially in that division thereof known as the Coal Measures. These consist of a great series (in South Wales as much as 10,000 feet) of alternating conglomerates, sandstones, shales and clays, with ironstones and occasional thin limestones, all characterized by the presence of certain fossils (plants, mollusca, reptiles, insects and fishes) more or less restricted to that series, and giving evidence

of conditions that were predominantly estuarine, lacustrine or terrestrial. Within these measures occur all the important coals of England, of Wales and of Ireland; though in the extreme north of Northumberland, in Cumberland, in Scotland and in Antrim, coals are found in the Lower Carboniferous rocks also (*see* Table, p. 47).

The subjoined complete list of the British geological systems, arranged in descending order, shows the positions of those which yield coal.

#### BRITISH GEOLOGICAL SYSTEMS

Quaternary	{ RECENT (Peat) Pleistocene
Kainozoic	{ Pliocene (Miocene—absent from Britain) OLIGOCENE (Lignite of Bovey Tracey) Eocene
Mesozoic	{ Cretaceous JURASSIC (Coals of Brora, Yorkshire Coast, and Kimeridge) Triassic Permian
Palaeozoic	{ CARBONIFEROUS (all ordinary coals and anthra- cites) Devonian Silurian Ordovician Cambrian
Eozoic	{ Archaeon

Wherever the geological succession is complete, the Coal Measures overlies the partly estuarine but



chiefly marine sandstones and shales of the Millstone Grit, which in its turn succeeds the Carboniferous Limestone with its rich and wholly marine fauna. Above the Coal Measures follow the red poorly-fossiliferous lacustrine and desert-formed rocks of the Permian and Trias. The position of our coals in the series of geological systems is thus perfectly well known, and if coal-seams were present in the other members of that series—*e.g.* in the Silurian or in the Trias—there is not the least doubt that, in a long-settled and surveyed country like ours, they would have been discovered ages ago. If therefore we are asked whether coal will be found under a certain property, the first point to ascertain is : what system of rocks occupies the surface ?

If the system at the surface is older than the Carboniferous it follows that as a rule the deeper we bore or sink, the farther away from the coal shall we go. Yet such an obvious inference as this needs emphasis when one finds, as recently as 1912, a boring for coal being driven for hundreds of feet into the Silurian rocks of Radnorshire !

In the past, considerable sums of money have been expended on boring and sinking for coal into some of the Ordovician and other rocks—both older and newer than the Carboniferous—on the strength of their consisting largely of black shales very like those of the Coal Measures. Even as recently as

ten years ago a level for coal was opened, with some amount of ceremony, in the side of a hill on the outcrop of the Ordovician rocks in Carmarthenshire. No coal had ever been seen to crop out anywhere in the neighbourhood, but it was enough that the beds were sooty black shales. The fact that they were full of Ordovician graptolites, an order of marine fossils that had become extinct long before Carboniferous times, was un-noticed or ignored by the credulous projectors.

If the surface-rocks are newer than the Coal Measures, there are two methods by which it may be ascertained whether Coal Measures lie below. Firstly, a thorough knowledge of general and local geology should be brought to bear on the problem ; but if the data available lead to no definite conclusion, the second method, namely boring, must be adopted. By this means samples of the rocks can be brought to the surface and examined by the geologist (p. 73).

But even where rocks newer than the Coal Measures come to the surface, it does not follow that coal, or even the Coal Measures themselves, will be found below. Firstly, the coal-bearing strata may never have been deposited, as the site may have formed part of a land-area at that time ; secondly, if deposited, the Coal Measures and their contained coals may have been worn off and destroyed prior to

the laying down of the strata that now occupy the surface: in both cases a gap will be found in the geological sequence. It may thus happen that a boring, after traversing rocks newer than the Coal Measures, may pass abruptly and quite unexpectedly into pre-Carboniferous rocks.


A consideration of an actual example will make this clear. In view of the approaching exhaustion of the exposed coalfields of Coalbrookdale and South Staffordshire, an attempt was made some ten years ago to ascertain whether coal could be reached at a workable depth beneath the Triassic and Permian rocks that occupy the intervening area, and a boring was put down at Claverley, between Bridgnorth and Stourbridge. Commenced in the upper part of the Permian, and passing through that formation and all three divisions of the barren Upper Coal Measures, it entered the productive Middle Measures at a depth of 1797 feet, with every prospect of success. But after traversing 393 feet of shales, sandstones, fire-clays, ironstone-bands, and several thin and useless coal-seams, all of the usual character, and containing the usual fossil plants, the drill suddenly entered a hard grey rock, which contained *Atrypa reticularis* and other recognizable marine mollusca that demonstrated it to be Silurian. The whole of the valuable lower part of the local Coal Measures, in which the chief coals of Shropshire and South Staffordshire are

situated, would thus appear to be absent. Presumably the Silurian rocks, while the coal-seams were accumulating in adjacent districts, had here formed a shoal or a land-tract that was not submerged till towards the Upper Coal Measure period. No survey of the surface could have foreseen such a result ; but it is obvious that in this case not only was the precaution of boring before sinking a very wise one, but also that a knowledge of fossils was of much value in preventing the borers going deeper.

In some cases it has been found on boring or sinking through the overlying newer rocks that although the productive part of the Coal Measures is present, yet the coal-seams themselves have locally thinned-out, or have so deteriorated in thickness or in quality as to be worthless.

If Coal Measures actually occupy the surface, a knowledge of the local geology will generally indicate whether and at what depth coals may be expected. It by no means follows, however, that all Coal Measures contain coal. Though occasional thin seams and streaks of coal are present throughout, the valuable coals are restricted to the lower and middle parts of the Coal Measures, as shown in the following Table, in which the subdivisions of the 'Upper' Measures are those adopted by Dr Gibson and other officers of the Geological Survey as a result of work in North Staffordshire :—

*British Carboniferous System, showing Positions  
of Workable Coals*

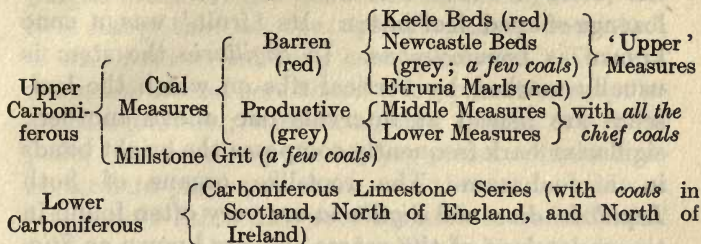

*Organic Remains.*—The vegetation of the coal-period as preserved in the coal-seams and their associated rocks was predominantly composed of vascular cryptogams and other flowerless plants of arborescent habit referable to five chief groups, viz. the Lycopodiales, the Equisetales, the Pteridosperms and Filicales, the Sphenophyllales, and the Cordaitales. The first two are represented respectively by our present-day Club-mosses (*Selaginella*, *Isoetes*, etc.) and Horsetails, and the Filicales by the modern Ferns; but the other groups are extinct. The flora of the period thus presented a very sombre and monotonous aspect; the flowering plants of our modern landscapes, with all their variety of colour, had not yet appeared. Most of the plants grew to a great size, stems of *Lepidodendron* and *Sigillaria* 50 feet in length being not uncommon.

The Lycopodiales were represented chiefly by the

genera *Lepidodendron* and *Sigillaria*. In the first, the stem is covered with the spirally-arranged lozenge-shaped leaf-bases. Its 'fruit' was a cone known as *Lepidostrobus*. In *Sigillaria* the stem is usually marked by vertical ribs on which the leaf-scars are placed at intervals one above another; sigillarian bark frequently composes the bright bands in a coal-seam. The root-like organs of both *Lepidodendron* and *Sigillaria* are very often found in the underclays of the seams and are known as *Stigmara*; their surfaces are characterized by oval scars from which rootlets spread into the surrounding mud.

The Equisetales were represented by numerous species of *Calamites*, whose lofty jointed stems made up dense thickets along the swamps, as do its nearest modern relatives the Horsetails along the margins of our ponds. The stems, which bore narrow leaves arranged in whorls at the nodes, are generally preserved in the fossil form as casts of the pith-cavity.

The Pteridosperms were plants with fronds resembling more or less closely those of some recent ferns, but distinguished by the bearing of seeds and not merely spores, and by certain anatomical features.

The Sphenophyllales were slender herbaceous plants resembling the *Calamites* in habit.

The Cordaitales included large trees characterized by long strap-like leaves and in habit resembling the Kauri Pine of New Zealand.

Many of these plants probably formed dense jungles in the low ground bordering the lagoons; but it is likely that on the uplands others flourished, of which few relics have been preserved. Through the moist atmosphere flitted a few primitive mayflies and dragon-flies; while scorpions, spiders and millipedes crawled along the rotting stems. There were no birds to prey upon them. In the waters below, a few ganoid fishes disported themselves and afforded sustenance to the salamander-like Labyrinthodonts; while mud-loving bivalve molluscs—*Carbonicola*, *Anthracomya* and *Naiadites*—closely resembling our pond-mussels, fattened in the slime beneath. Occasionally an irruption of salt water brought with it some mollusca of the outer sea, such as species of *Productus*, *Chonetes*, *Lingula*, *Pterinopecten* and *Gastrioceras*.

*Use of Fossils.*—Not only is a knowledge of fossils of great practical importance to the miner in enabling him to guard against fruitless sinkings in rocks known elsewhere to be devoid of coal, but it is also of use in helping him to distinguish one part of the Coal Measure series from another. The plant-remains form a useful index for this purpose, as Kidston, Arber and Walcot Gibson have shown; for certain plants are restricted to the Upper Coal Measures, while others have not been found above the Middle Measures. The mollusca are still more

useful, and can often be depended upon to identify a particular seam in widely-separated coal-pits. So far then from fossils being merely the playthings of the curiosity-hunter, in the hands of the geologist they are of the greatest value in directing the collier to a suitable place for his operations and in protecting him from futile and hopeless undertakings.

*Conditions of Deposition.*—It is generally agreed that the coal-seams originated from vegetable matter produced by the decay of luxuriant swamps and forests, which spread out from the land into the shallow waters of estuaries, lagoons or lakes, much as do the present-day mangrove-swamps of tropical countries. But two different views have been held to explain the formation of the seam itself. The advocates of the 'growth-in-situ' theory believe that the seam represents the actual peat-bog or morass itself, and that the underclay generally found below the seam is nothing else than the soil on which the vegetation grew. On the other hand, the adherents of the 'drift' theory believe that the vegetable debris of the swamps was carried out into the lagoon by running water and there deposited like any other sediment. So good a case has been made out by both parties that it appears certain that some coals have been formed in one way and others in another, while it is highly probable that in many cases both modes of formation have shared in the production of a single seam.



*Coal Formation.*—After a mass of vegetable debris had accumulated, the slow subsidence that affected the region carried the mass below water-level, preserved it from decay, and sealed it up under layers of gravel, sand and mud, where it became converted into a seam of coal. The processes to which this conversion are to be attributed have been discussed at length by Dr E. A. N. Arber. They appear to have been chiefly biochemical, and due to the action of bacteria; they were attended by a loss of oxygen and hydrogen, and an evolution of carbon dioxide ( $\text{CO}_2$ ) and methane (marsh gas,  $\text{CH}_4$ ), the final result being a pulp of hydrocarbons, relatively richer in carbon, in which organic structures are largely obliterated. Whether the resulting coal is sapropelic (such as cannel), or humic (*e.g.* house coal), or anthracitic, seems to have been determined chiefly by the extent to which bacterial action had proceeded before being arrested by the poisonous organic acids to which that action gave rise, though differences in the nature of the vegetation no doubt had much influence. There is good evidence that the conversion of the vegetable debris into coal took place soon after its entombment, and that subsequent heat and pressure, consequent on its burial deep in the earth-crust, did little more than consolidate and harden it.

## CHAPTER III

## THE COAL MEASURES AND THE COAL-SEAM

*Lithology.*—The productive Lower and Middle Coal Measures of Britain consist of a great series of conglomerates, grits, sandstones, shales and clays, with bands of ironstone, and numerous seams of coal. These materials were laid down, never far from land, in the shallow waters of swamps, lagoons and estuaries, to which the sea gained only occasional access. As the region slowly subsided, so the accumulating sediments increased in thickness, till in the deeper hollows as much as 10,000 feet had been deposited.

The coarse pebbly materials forming the conglomerates ('pudding-stones' of the miner) are seldom persistent, but are irregularly bedded and lenticular, and show signs of rapid accumulation and repeated sorting by change of currents, with re-deposition not far away. They often form a basement-group to a series of sandstones, which are usually more persistent and can frequently be traced for several miles. Where these coarse materials were deposited uninterruptedly for a lengthened period over wide areas, they constitute an important member of the local Coal Measure sequence, as is the case with the Pennant Sandstone group of South Wales, the Forest of Dene, and Somerset, which attains a thickness of

several thousand feet. Few coal-seams occur within these thick sandstone groups. Usually, however, sandstones, shales and clays alternate with each other, and also pass laterally one into the other.

The shales and clays, which are more persistent than the sandstones, and make up the larger proportion of the Coal Measures, are more tranquilly formed deposits of fine-grained clayey matter. The shales ('binds' of the miner) are composed of thin layers, often no thicker than a post-card, the surfaces of which are frequently covered with a film of sand or flakes of mica, which give them a fissile character, so that they readily split into thin slabs, plates, or leaves. The clays ('clunch' and 'clod') are beds of non-laminated mud that crumbles into small irregular fragments. The ironstones are generally nodular concretionary masses of earthy carbonate, in the form of flattened balls ranging up to a foot or more in diameter, or smaller irregular lumps scattered through the shale. In the past they constituted the chief source of our iron-supply, and were worked on a large scale in South Wales, Coalbrookdale, and South Staffordshire.

All these rocks vary in colour from white to intense black, dependent on the amount of carbonaceous matter present. Where exposed at the surface the sandstones, owing to the oxidation of the iron-compounds usually diffused through the stone, tend

to weather with rusty-brown, red, or yellow tints ; but the shales and clays lose their grey or black colours less readily. The fossil-remains of plants, abundant in most of the beds, are specially well-preserved in the shales ; while fragments of fern-leaves or shells often form the nucleus around which the ironstone segregated.

The productive Lower and Middle Measures are succeeded in most of the Midland coalfields by an Upper series of relatively barren measures, in which a red colour prevails (see Table, p. 47). In these, coals are rare, thin, and often pyritous ; several limestones occur, not more than a foot or so in thickness, characterized by the presence of annelids and entomostraca (*Spirorbis* and *Carbonia*, etc.). The red Etruria Marls of the Upper Measures are the source of the famous Staffordshire ' blue bricks.'

The coal-seams themselves when viewed on a true scale form a very small proportion of the total thickness of the Coal Measures ; so that in 10,000 feet of strata in South Wales, for instance, the coals in Glamorgan account for only about 124 feet, which, distributed in 48 seams, gives an average of 2 ft. 7 in. for the thickness of each seam. A coal-seam occurs as a definite bed of rock, just like its associated sandstones and shales, and usually runs for long distances, maintaining its own characters and holding its proper position in the sequence over many square miles.

But the seam is itself usually more or less composite, and consists of bands of coal separated by partings of shale or clay; while the constituent coal-bands of a single seam may differ among themselves in quality and thickness.

As an example of the kinds of strata passed through in a coal-shaft, the following section of the upper portion of a pit at Polesworth (Warwickshire) may be quoted:

*Shaft-section at Polesworth*

	Thickness		Depth	
	Ft.	In.	Ft.	In.
Soil .. .. .	..	9		
Gravel and sand .. .. .	..	16 0	16	9
Blue bind .. .. .	..	1 6		
COAL smut .. .. .	..	2 0	20	3
Clunch .. .. .	..	6 0		
Blue bind .. .. .	..	11 0		
Stony bind .. .. .	..	7 6		
Strong blue stone .. .. .	..	2 3		
Blue bind .. .. .	..	10 6		
COAL .. .. .	..	1 4	58	10
Stony clunch .. .. .	..	6 6		
Stony bind with ironstone balls .. .. .	..	9 6		
Clunch and bat with ironstone balls .. .. .	..	7 3		
Strong bind .. .. .	..	6 6		
Soft bind .. .. .	..	1 6		
COAL .. .. .	..	3	90	4
Strong bind .. .. .	..	10 3		
Soft bind .. .. .	..	1 6		
Clunch and bat .. .. .	..	3 0		
Stony clunch .. .. .	..	6 6		
Blue bind with ironstone .. .. .	..	12 10		
COAL: Smithy Coal .. .. .	..	2 4	126	9

The 'gravel and sand' met with to a depth of 16 ft. 9 in. are probably Glacial deposits. 'Bind' is a miner's term for shale; 'clunch' is a tough clayey rock; the 'strong blue stone' is presumably sandstone but possibly shale; 'bat' is a highly-carbonaceous black shale. The Smithy Coal, being the only one in the section of any importance, has alone been dignified by a distinctive title. The coal at 20 ft. 3 in., being close to the surface, appears to have weathered to a powdery condition, and is recorded as a 'smut.'

As an example of a single seam made up of several coal-bands of different character, the following section of the Barnsley Seam of Yorkshire may be given:

	Ft.	In.
Coal called the Day Bed .. .. .	1	0
Parting (fireclay) .. .. .		2
Coal called the Middle Bed .. .. .	1	1
Coal called the Low Bed .. .. .	1	3
Parting (fireclay) .. .. .		8
Coal and pyrite, called the Clay Seam .. .. .		7
Coal called Hards .. .. .	2	8
Coal called Slottings .. .. .	2	2
	<hr/>	
	9	7

The coals from the Day Bed, the Low Bed and the Slottings are gas- and house-coals; the Hards is used

for coke-making and steam-raising; while the pyritous coal of the Clay Seam serves for lime- and brick-burning.

*Roof and Floor.*—The bed of rock that immediately overlies the coal-seam is known as its roof. Where it is a sandstone or a hard shale it affords facilities to the miner in reducing the cost of timbering the underground roadways and workings. A soft friable roof will often give such trouble as to make a good seam of coal unprofitable to work. The rock-bed immediately below the coal is known as the coal-seat, thill or floor. It is usually a bed of grey clay (‘underclay’), a foot or so thick; where composed chiefly of very finely-divided siliceous mud free from alkalis it constitutes a fireclay, highly esteemed for the manufacture of firebricks, crucibles, melting-pots for the glass-maker, and gas-retorts, as at Stourbridge in Worcestershire, where the best fireclay is found below the Thick Coal. A very hard siliceous floor (‘gannister’) containing 57 to 96 per cent. of silica is common in the Lower Coal Measures of Lancashire and Yorkshire, and is used as a bed for the hearths of iron-furnaces. A soft clay floor causes much trouble to the miner, as it swells up under pressure of the overlying strata and tends to fill up the underground roadways (p. 29). In the coal-seat are frequently found the roots (*Stigmara*) of some of the trees that grew on, or were drifted to,

the site and contributed to the formation of the overlying coal.

*Breaks in the Seam.*—The continuity of a coal-seam is liable to be interrupted by a number of causes, some of which were active during or just after its formation, while others did not come into operation till a long-subsequent period. It is obvious that where the swamp or lagoon bordered an elevated land-tract, the coal-seam must have come to an end somewhere along a line of shore, just as a swamp does nowadays, though it is not often possible to point to such an original margin of deposition. In South Staffordshire, however, the Thick Coal, when followed southward of Halesowen and Cradley, has been found to become so earthy and impure through admixture of muddy ingredients as to be useless as a fuel; and there is no doubt that if followed far enough it would be found to end against the older Palaeozoic rocks (Silurian and Cambrian) that formed the coast of the lagoon. The Upper Measures are known to overlap the lower and to extend farther southward. Elsewhere in the same coalfield, as at West Bromwich, local shoals in the bottom of the lagoon have similarly prevented the deposition of one or more of the coal-seams over considerable areas, a contingency quite incapable, unfortunately, of being foreseen from an examination of the surface. In some places a seam of good coal, far from its original



margin, may become worthless over an area some acres in extent owing to an intimate admixture of mud or sediment. Again, a parting of clay, shale, or sandstone in a coal may gradually thicken out at the expense of the coal till little of the coal is left ; or the whole seam may thin away to a knife-edge. When a coal-swamp was submerged and covered with a bed of sediment, the old stream-courses that crossed the swamp, and new channels eroded through the vegetable layer, were filled-in with sand, which now forms a ' wash-out ' which, descending from the roof, may cut out the coal more or less completely for some yards in width. Such a wash-out has been described in the Coleford High Delf Seam in the Forest of Dene. Conversely, a sand-bank occasionally projected upward through the vegetable layer, so that now the coal-seam ends off on both sides of a mass of sandstone rising from the floor. All these interruptions are due to immediately contemporaneous causes.

Other breaks in the continuity of a seam are due to the foldings, tiltings and squeezings that the rocks have undergone during subsequent periods of earth-movement. A considerable tract of productive Middle Coal Measures, with valuable seams of coal and ironstone, along the eastern side of the Coalbrookdale Coalfield, must have been elevated by a gentle folding sufficient to bring it within reach of the

waters of the lagoon or estuary, and may have been raised even above the waters, and subjected to sub-aerial erosion during Coal Measure time, for large areas of the productive measures were washed away before the deposition of the Upper Measures, which lie across their edges. Much coal has been thus destroyed by this Symon Fault, as it is called.

Where the beds have been thrown into undulations it is found that a coal-seam locally thickens abnormally (a 'swelly'), but in a contiguous part of the undulation suffers a corresponding constriction, amounting in some cases to complete extinction (a 'nip-out'). All these causes, as well as the true 'faults' to be described anon (pp. 65-7), combine to harass the miner and damage the fortunes of the mine; they call for special precautions and delicate treatment, and under the name of 'abnormal places' carry with them special rates of payment.

*Igneous Intrusions.*—Lastly, the miner has in some coalfields to reckon with the devastating effects of igneous intrusions, which have invaded the coal-seams and reduced some of them to useless dust. Molten igneous material, at some period subsequent to the Carboniferous, forced its way up from below along more or less vertical fissures ('dykes') or pipes ('necks') in the earth-crust, burrowed a road for itself between the beds, or raised the overlying strata into a sort of mushroom-shaped bubble or

laccolite. Whether the molten matter ever reached the surface we cannot tell ; certain it is that it found it easy to follow a bed of coal, which it generally baked to a substance resembling coke or soot. The Rowley Hills in South Staffordshire and the Clee Hills in Shropshire are capped with masses of such basalt (quarried for road-stone as Rowley Rag and Dhustone), while several of the contiguous coal-seams have been invaded by sheets of similar material ('green rock'). Igneous rock has damaged considerable areas of coal about Willenhall, Wednesfield and Bloxwich in South Staffordshire.

## CHAPTER IV

### COALFIELDS, FOLDS AND FAULTS

*Coalfields.*—Though the greater part of the area now known as the British Isles was originally covered by the Coal Measures, it is possible to point to certain districts over which it is very questionable if those beds were ever deposited. The high lands of North and Central Wales, the Highlands of Scotland, and the heights in the north-west of Ireland, are probably parts of old land-areas that stood up above the swamps and lagoons of the coal-period. During Lower and Middle Coal Measure

times a land-tract certainly crossed the centre of England, for there only the Upper Coal Measures were laid down, as we have seen (p. 58). But the original shore-lines of the lagoons are seldom preserved or visible; either they have been removed long ago by denudation, or they lie concealed under newer rocks. To the miner it is a matter of small consequence, as the Coal Measures are now found to occupy some twenty-five detached areas known as coalfields or coal-basins, the limits of which have been largely determined by the plications into which the rocks were thrown by earth-movements during Lower Permian time.

*Folds.*—Originally deposited in more or less horizontal sheets, the Carboniferous rocks were gently folded into arches (anticlines) and troughs (synclines), or irregular basins, by movements more or less at right angles to each other. The arches and elevated parts of the folds were planed down by detritive agencies (the sea, rain and rivers, etc.), so that not only the Coal Measures but also great thicknesses of the underlying rocks were eroded from their crests. The formation of such disconnected basins from a once continuous sheet of sediments is shown in Fig. 4.

In the centre of a basin the coals are more or less flat or horizontal, and may lie at a great depth; but toward the edges they rise at a considerable

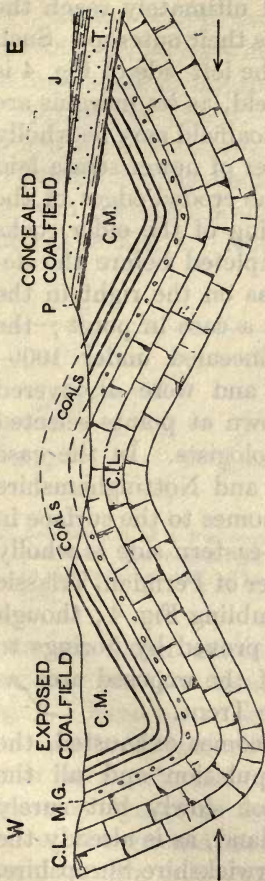


Fig. 4.—Section of a series of Carboniferous strata originally horizontal and continuous, but now folded by compression and forming two detached coalfields, separated by outcrops of Carboniferous Limestone (*C.L.*) and Millstone Grit (*M.G.*).—*C.M.*, Coal Measures; *P*, Permian; *T*, Trias; *J*, Jurassic. The arrows show the direction of the pressure.

It will be observed that the Carboniferous strata now form two synclines or troughs, separated by an intermediate anticline or arch. The oldest Carboniferous beds come to the surface in the core of the anticlines, while the newest are found in the centres of the synclines.

The Carboniferous strata were folded, and then reduced by denudation to a plane, before their edges were covered by the Permian and newer rocks, which have not been folded, but merely tilted gently toward the east.

Steeply-dipping coals, such as those on the western side of the 'exposed coalfield,' are sometimes known as 'edge-coals' or 'rearers.'

angle from the horizontal and ultimately reach the surface along what is known as their outcrop. Such a coalfield as that shown on the left side of Fig. 4 is known as an 'exposed' coalfield, as its margins are visible at the surface. But a coalfield may be wholly or in part concealed by a cover of newer strata laid down unconformably across the eroded edges of the Carboniferous rocks—the folding of the older rocks having been in the main completed before the deposition of the newer cover, as on the right in the figure. The Kent Coalfield is a case in point; the Coal Measures are wholly concealed under 1000–2000 feet of Mesozoic rocks and were discovered solely by deep borings put down at points selected on theoretical grounds by geologists. In the case of the Yorkshire, Derbyshire and Nottinghamshire Coalfield, the western margin comes to the surface in the counties named; but the eastern side is wholly concealed beneath a thick cover of Permian, Triassic and Jurassic rocks, thus resembling Fig. 4; though the Coal Measures have been proved by borings to extend some miles eastward of the exposed area as far at least as the valley of the Trent.

As an exposed coalfield becomes exhausted, the pits and their attendant population and all the unsightly concomitants thereof slowly but surely invade the agricultural borderland, as is already the case in South Staffordshire, Warwickshire, Shropshire,

etc., till the coal is worked out, or exceeds the limit of 4000 feet, below which it is probable that it would be impossible or unprofitable to work it.

*Overthrust Faults.*—Sometimes the compression to which the measures have been subjected has been so intense that the beds have been bent into a vertical or even inverted position, as is nearly the case on the left in Fig. 4. Not infrequently the rocks have

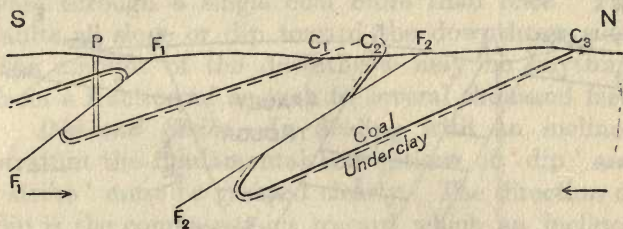


Fig. 5.—Section of a coal-seam affected by compression, which has produced two overthrust faults  $F_1$  and  $F_2$ . Each fault dips to the upthrow side. The arrows show the direction of compression.

given way under this treatment, and have slid bodily over one another along an overthrust fault, as in Fig. 5. Here a coal with a southerly dip is cut by two overthrust faults  $F_1$  and  $F_2$ ; it crops out three times (at  $C_1$ ,  $C_2$ , and  $C_3$ ), and at  $C_2$  is inverted, the underclay lying on top of the coal. If the surface of the ground had been planed down a little lower, another crop would have been produced near

the pit  $P$ . In the Somerset Coalfield the Radstock 'slide-fault' has produced a similar effect, and in West Pembrokehire the measures are so riddled with overthrusts that a single seam will crop out again and again in the space of a few hundred yards. In Fig. 5, a shaft sunk at  $P$  would pass through the same seam twice; and there a given area of ground would contain twice the normal quantity of coal.

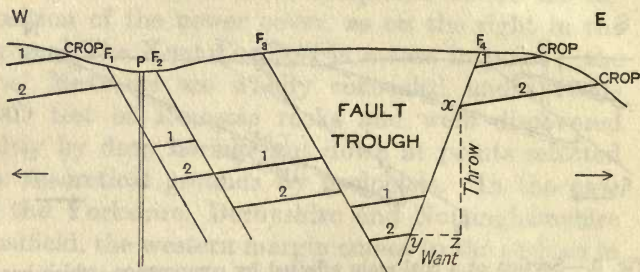


Fig. 6.—Section of two coal-seams (1 and 2) with westerly dip, and affected by extension, which has produced four normal faults ( $F_1$ — $F_4$ ). Coal No. 1 crops out twice, No. 2 only once.  $F_1$  and  $F_2$  are 'step-faults,' throwing the coals down eastward in two steps.  $F_2$  happens to bring coal No. 1 opposite No. 2;  $x-z$  is the 'throw' of  $F_4$ ;  $y-z$  is its 'want' or 'barren ground,' and the angle  $yzx$  is the 'hade.' The pit  $P$ , being sunk in the 'want,' misses the coals. All the faults dip to the downthrow side. The arrows show the direction of the extension.

*Normal Faults.*—Usually, however, the beds have suffered much less severely, and form parts of gentle undulations in which extension has been set up. The rocks have snapped along lines of fracture that have



allowed the strata to spread out laterally and occupy a greater horizontal extent than at first. Such normal faults are illustrated in Fig. 6, where two coals are shown. It will be noticed that here there is less coal in a given area than would be the case were the ground unfaulted; also that the beds have suffered extension, measured by the sum of the barren grounds or 'wants,' and that no pit would pass through a single coal more than once. The faults all slope or dip toward the downthrow side. The amount of the downthrow may be anything from a fraction of an inch to several thousand feet.

*Dip and Strike.*—In dealing with an inclined stratum the fundamental conceptions of 'dip' and 'strike' must be grasped clearly. The direction of dip is the compass-point toward which an inclined bed exhibits its maximum declination from the horizontal, the amount of the dip being expressed in degrees from the horizontal or, among miners, usually in inches to the yard; a dip of 3 inches a yard means that in a horizontal distance of 36 inches a bed has declined three inches, or at the rate of 1 in 12. 'Strike' is the compass-direction along which the bed exhibits no dip; strike is always at right angles to the direction of dip. In mining-practice it is called 'level-course,' because as long as an underground roadway in the coal follows the line of strike it remains level. Thus, if a bed dips south or north,

it strikes east and west. A familiar illustration of these conceptions of dip and strike is furnished by the ordinary roof of a church. The direction taken by the drops of water on the sloping tiles is that of the dip ; the direction of the line of ridge-tiles is the strike. Dip and strike are quite independent of the surface-configuration of the country, and hold good underground. But the course of the outcrop of a bed across the country depends not only on the direction and amount of the dip, but also on the form of the surface. A vertical bed always makes a straight outcrop, the direction of which coincides with the strike. An inclined bed cropping out on a uniform plane, whether that plane is horizontal or sloping, also makes a straight outcrop. But in all other cases the outcrop takes a sinuous course dependent on the surface-features.

*Joints.*—Most rocks are traversed by sets of fissures that cut through them at right angles with the bedding-planes and are known as joints. A joint differs from a fault in that no relative displacement has taken place along it. Joints usually fall into two sets, one more or less parallel to the strike, the other to the dip, and thus between them cut up a stratum into roughly rectangular blocks. They afford great assistance to the quarryman and miner, and generally determine the direction in which a quarry and the workings in a colliery are to

be laid out. The joints parallel to the strike are usually the more pronounced, and are known as the 'cleat,' 'face,' 'backs' or 'slyne,' while the joints parallel to the dip are called 'ends' or 'cutters.' The main roadways in the coal are often driven parallel to the cleat, or 'cleavage' as it is sometimes called, while the bords or passages from which the coal is taken run parallel to the 'ends' (Fig. 11, p. 97).

## CHAPTER V

### PROSPECTING AND BORING

*Prospecting.*—Enough has been said already (p. 43) to show the futility of searching in Britain for coal in any but the Carboniferous rocks; and it has been pointed out that the productive measures are confined (except in Scotland, the north of England, and the north of Ireland) to the lower and middle parts of the Coal Measures. In this country geological examinations of limited areas have been carried out in many districts and recorded by private individuals, scientific societies, syndicates or mining prospectors, from the days of George Owen of Hênlllys (1602) onward. Some of these investigations preceded, while others have followed, the footsteps of

the State Geological Survey, instituted in 1835. The results have been embodied in innumerable books, scientific 'proceedings,' memoirs, and maps on various scales, so that few districts remain of which the main geological outlines have not been ascertained; and it is wholly unlikely that any considerable tracts of Coal Measures are left to be discovered on the surface. A geological map of the 'solid' rocks of the British Isles on the scale of one inch to the mile has long been completed by the Geological Survey, and that body is now engaged in a detailed survey of the coalfields on the six-inch scale, which permits the tracing of all the rock-outcrops, coal-crops, faults and folds, as well as the accurate delineation of the 'superficial' deposits of boulder-clay, sand, gravel, and alluvia that in many districts conceal the 'solid' rocks below.

The primary aim of a geological survey is to lay down on a previously constructed topographical map a partial or complete delineation of the outcrops that occupy the surface of a given district, and to furnish materials for the construction of an ideal section of the country, such as would be revealed in the banks of a gigantic trench (a 'longitudinal section'), or in the sides of a deep shaft (a 'vertical section'). The degree to which these aims can be attained depends chiefly on the extent to which the rocks are exhibited in natural exposures, such as

the craggy sides of mountains, the banks and beds of streams, the cliffs along the coast, the brows of inland escarpments; or in artificial sections, such as wells, mines and quarries, cuttings on railways, canals and roads, the foundation-trenches of buildings, the surfaces of ploughed fields, and in hedge-banks and ditches. It is quite a mistake to suppose that a geological surveyor has constantly to resort to digging holes in the ground or sinking trial-shafts and borings. On the contrary, all the main features and most of the details of the geological map of Britain have been laid down on the evidence of sections provided by Nature and by ordinary industrial operations. But our knowledge of the Coal Measures would be incomparably smaller than it is if these rocks had not been explored so thoroughly by the miner, and the results stored up in plans and section-books by the mining engineers of the country. In the future, important accessions to our knowledge of the underground extensions of the coalfields can be obtained only by sinking and boring-operations.

The outcrop of a seam of coal is seldom visible, unless it reach the surface in a perpendicular cliff, either on the coast or in the rocky sides of a valley or ravine. Under the effects of the weather, coal breaks down into fine slack or 'smut,' which a few inches of soil or debris will conceal effectually. A brook that flows rapidly enough to maintain a clean

rocky bed occasionally affords a glimpse of the coal, and sometimes the gravel and alluvium along a watercourse contain lumps of coal that can be traced upstream to their source, where the seam itself may be detected.

Ferruginous springs, which throw down a flocculent precipitate of rust-coloured iron oxide, are often taken to indicate the proximity of coal; but such a deposit shows nothing more than the presence of ironstone or iron pyrite ( $\text{FeS}_2$ ) in the rocks below. On the outcrop of the Coal Measures, ironstone-bands may or may not be attended by coal-seams; but in South Wales ferruginous springs are quite as common on the outcrop of some of the pyritiferous black shales of Ordovician age, from which coals are wholly lacking.

If the search for the outcrop of a coal be successful, it will be desirable to ascertain its quality and thickness, the nature of its roof and floor, and the direction and amount of its dip. If it crop out with a low dip on steep ground, a tunnel ('heading' or 'drift') may be driven into it for a few yards so as to reach the unweathered coal. If on gently-sloping or flat ground, it will be more convenient to sink a trial-shaft to the coal on adjacent higher ground or on the 'dip-side' of the outcrop, *i.e.* on that side toward which the coal appears to dip. If the coal is suspected of having a high dip (over  $45^\circ$ ,

say), it may be located by costeaning, *i.e.* by sinking two shafts in a line at right angles to the crop, one on each side of its supposed position, and connecting their bottoms by an underground drift.

If sufficient information has been obtained at the outcrop, and it is confidently anticipated that the coal underlies the property, shafts may be sunk forthwith on a site selected with special reference to underground and surface facilities.

*Boring.*—If, however, no satisfactory knowledge has been gleaned by the prospecting, and in districts bounded by faults or remote from the outcrops, or where the Coal Measures are concealed under a cover of newer rocks, resort must be had to boring. The operation consists in boring a vertical hole, of small diameter, in the earth-crust, in order to bring up samples of the underlying rocks, coals, etc. The experiment, if successful, should yield data as to the depth, thickness, character and number of the coals. At least three boreholes are necessary, however, to ascertain the strike and dip of the beds, and they should be placed in the form of a triangle, and at sufficient distances to test the whole of the property concerned.

Borings are conducted on two different principles: percussion, and rotation. On the first, different forms of chisels are employed, fixed to the ends of solid rods. By raising the chisel a few inches,

and allowing it to drop on to the rock, a hole is gradually chipped out. A slight turn is given to the rods before each fall, so that the hole is kept circular. As the hole deepens, more rods are screwed on at the top. In soft strata the hole must be lined with iron or steel tubes, to prevent the sides falling in. The powder and fragments of rock produced by the percussion are brought up at frequent intervals by a cylindrical tool called a sludger; and as the borehole usually fills with water oozing from the porous beds, the samples of stone come up in the form of mud, in which a sharp look-out must be kept for fragments of coal. By carefully noting the length of rod required to pierce each fresh stratum, a record or 'section' of the boring is procured. The defect of the method lies in its bringing up mere mud and chippings, which afford little information as to the dip, the lithological characters, or the fossil-contents of the rocks.

For these reasons the rotatory methods are always preferable. In these the rods are hollow, to allow of a supply of water being conducted to the cutting-tool, which consists essentially of a hollow cylinder, the lower edge of which is armed with hard minerals (usually rough impure diamonds), or with teeth like those of a saw. In another method, chilled steel shot are put down the hole and, finding their way beneath the cylindrical cutter, act as



a rasp—much as primitive man employed sand, water, and a hollow stick to bore holes in his stone axe-heads. By giving a continuous motion (at 200 or 300 rotations per minute, by steam-power) to the cutting-tool, an annular groove is cut in the rock, with the formation of a solid core, which is embraced by the cylinder as the cutting edge descends. By raising the apparatus, the core—in pieces several feet long—can be brought to the surface for examination. The diameter selected for the initial part of the boring will depend on the depth to be attained, and may be as much as 26 inches. As the boring proceeds, the diameter is reduced in several stages, determined by the length of boring that requires to be lined; so that the lowest cores raised may have a width of only one inch or so, though cores less than four inches in diameter are of little real value. A liberal supply of water conducted down the hollow rods and escaping under the cutter rises to the surface again and so flushes the sediment out of the boring. Unfortunately in soft beds, such as clays and coals, it frequently does this so effectually that no core is left, and proof of the character of this part of the section is to be obtained only by carefully collecting the washings brought to the surface in the escape-water; and unless great care is exercised, a coal several feet thick may be wholly overlooked.

In Germany borings have been put down to depths of over 6000 feet, the operation lasting several years. A recent boring at Heswall, on the west coast of Cheshire, was carried down to 3362 feet in Trias and Coal Measures in 10 months by Brejcha's method. The cost of percussive boring in Coal Measures is usually quoted at 7*s.* 6*d.* per fathom for the first five fathoms ; 15*s.* a fathom for the second five fathoms, and so on. The Diamond Rock-Boring Co.'s price is 8*s.* per foot for the first 100 feet ; 16*s.* per foot for the second 100 ; 24*s.* for the third 100, and so on.

It would be supposed that cores costing so much money and trouble to obtain would be at once labeled with their depths, and laid out in proper order under cover, so as to protect them from the weather and permit of their thorough examination by a geological expert. But too often everything but the coal itself has been treated with scant courtesy as being of no ' practical ' importance—a somewhat short-sighted policy in face of the fact that the coal itself often yields no proper core, and that a reasonable probability of its presence in the boring may depend on some peculiarity in the associated strata appreciable to the geologist alone. And when it is borne in mind that the journal of the boring is entered up in some cases in quite misleading or unintelligible local terms, and that fundamental

differences between certain of the beds are apt to be overlooked by the man in charge, it is clear that the preservation of every part of the core is a matter of prime importance, even from the view-point of the colliery projector, not to mention that of the scientific investigator. Yet so far is this matter neglected that, even where plenty of space is available, the cores are sometimes piled up one above another out in the open, where the first lengths are soon buried out of sight, and the whole pile converted by frost and rain and the trampling of cattle to a heap of useless debris even before the boring is finished, and reported on by the expert.

## CHAPTER VI

### WINNING THE COAL

*Winning the Coal.*—Satisfactory evidence having been obtained that coal underlies the property, a decision must be made as to whether it is to be won by shafts, levels, slants or drifts. If the ground is comparatively flat, and the measures have only a slight inclination, as is the case with many of our coalfields, or if the area to be worked is bounded by faults or concealed under a cover of newer rocks so that the coals nowhere crop out, shafts will be

adopted. If, however, the country is deeply trenched by valleys (as in South Wales and the Forest of Dene), on the sides of which the coals crop out with little or no dip, it may be advantageous to retain the ancient method of driving day-levels from the outcrop. If the coal rises steeply to the outcrop on the side of a valley or along the foot of an escarpment, as on the northern margin of the South Wales Coalfield in Carmarthenshire, where the coal to be worked underlies a great thickness of barren measures, it is usual to avoid the unremunerative outlay on shaft-sinking, and to win the seam by 'slants,' 'slopes' or 'slips,' *i.e.* inclined tunnels following the coal downward from its outcrop. In special circumstances, where high-dipping beds crop out in hilly ground, the coals may be reached by cross-measure drifts cut in the rock and ascending or descending in the measures as the case demands, much as metalliferous veins are won. These different methods of winning the coal, and some combinations of them, are shown in Fig. 7.

*Shafts and Sinking.*—Where the measures are known to have a small dip, and shafts are adopted, their position will depend largely on the facilities afforded on the surface for the construction of railways, canals and roads, or on the proximity of a navigable river, so that the coal can readily be sent away to its destination. For the land-sale (to supply

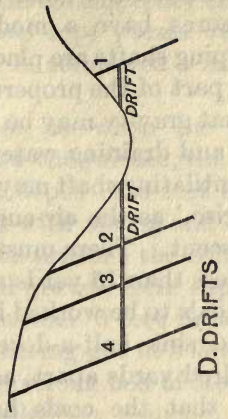
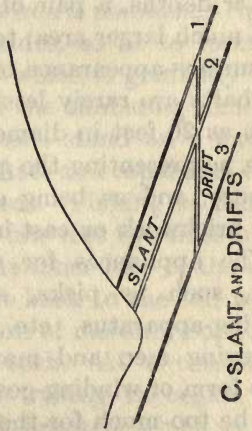
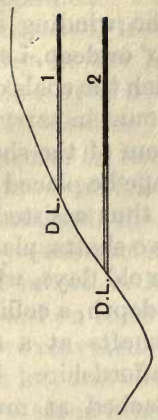
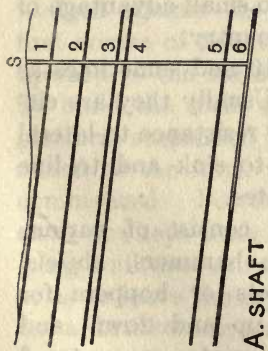


Fig. 7.—Sections showing various ways of winning the coal; A, by a shaft; B, by a day-level driven in from the outcrop of each coal; C, by a slant in coal No. 2 and drifts to reach coals 1 and 3; D, by drifts alone.

local demand) a good road is essential. Where the measures have a moderate dip, the winding and pumping shafts are placed 'to the dip' or deep, *i.e.* in that part of the property toward which the coals dip, so that gravity may be turned to account in carrying coal and draining water to the bottom of the shaft. A ventilating shaft may with advantage be placed 'to the rise,' as the air-current may be thus assisted in its ascent. There must be at least two shafts, placed not less than 15 yards apart. In the old days, when the coals to be worked lay at a small depth, a colliery would sink half-a-dozen or more shafts at a few hundred yards apart, as in South Staffordshire; but now that the coals have to be reached at much greater depths, a pair of shafts is made to do duty for a much larger area, to the no small advantage of the surface-appearance of the country.

Shafts are rarely less than 10 and sometimes as much as 20 feet in diameter. Usually they are circular, as presenting the greatest resistance to lateral pressure, and as being easiest to sink and to line with brickwork or cast-iron plates.

The appliances for sinking consist of various tools, such as picks, shovels, hammers, chisels, blasting-apparatus, etc., buckets or hoppers for conveying men and materials up and down, and some form of winding-gear. The water encountered may be too much for the buckets, and may need to

be pumped. For winding, a small temporary engine is installed, from which a steel rope passes over a pulley in the head-gear and is connected with the bucket by a hook.

In ordinary circumstances, as when the Coal Measures lie immediately below the surface, the procedure is as follows. After a depth of 6 feet or so is attained, the shaft is lined with strong and carefully constructed timbering, to prevent the soft soil and subsoil or loose superficial gravels from slipping inward on to the sinkers. Another 6 feet or so are now excavated, and more timbering put in below the first lot, and so on till the first strong bed of stone—the ‘stone-head,’ as it is called—is reached. On this a curb of wood or of cast-iron is placed and tightly wedged against the shaft sides, so as to form the first course of a brick wall, which is gradually built upward to the surface, and the timbering removed. To build the wall, the masons stand on a circular platform suspended in the shaft and capable of being raised as the work progresses. Sinking is then recommenced. For the first few feet the sides of the shaft are kept flush with the inner face of the overlying wall, but are then cut back to the full width, so as to leave the first section of masonry supported on a bracket or shelf of rock. At a convenient depth, a fresh section of walling is begun, and carried upward to the rock-bracket, which is then

carefully removed till the two sections of walling meet end to end.

Sometimes, however, quicksands, usually water-bearing, may form a thick cover over the Coal Measures, and may need special treatment; for, generally speaking, the softer the beds, the more troublesome they are to sink through. One method consists in constructing a strong water-tight open cylinder of wood, of the diameter of the shaft, and armed with a sharp iron edge. This cylinder is then set upright in the sand, and allowed to sink while the sand within is excavated down to the stone-head, upon which the walling can be commenced. A modification of this method is to employ a cast-iron cylinder built up of segments bolted together at flanges on the inner sides. This cylinder is then left as a permanent water-tight lining to the shaft. Other methods depend on ingenious applications of freezing-mixtures to the water-logged sand. In one (Poetsch's method), the sand underlying the site of the sinking is frozen into a solid mass, which can then be sunk through in the ordinary way. To do this, a number of water-tight closed wrought-iron tubes are forced down through the sand till they reach the stone-head. Within each tube a narrower inner tube with openings at the bottom is let down to the same depth. The upper ends of the inner tubes are then connected with a refrigerator and



force-pump, by which a freezing liquid is forced downward to the bottom in a continuous current. The liquid escaping at the bottom of the inner tube returns by the outer one to the refrigerator. By these means a column of frozen sand grows round each tube till the whole mass is rendered solid. By a variation of this method the tubes are arranged in a ring round the site of the shaft (Gebhardt and Koenig's method), and a wall of frozen sand produced, within which the unfrozen sand can be excavated down to the stone-head.

In sinking through hard beds, blasting must be resorted to. Shot-holes of an inch or two in diameter are drilled in the stone to a depth of four or five feet, and are arranged in two rings, one round the centre, the other near the edge of the floor. The holes in the inner ring are drilled obliquely, so as to approach each other in order to blow out an inverted cone of rock. The outer ring of holes blows the surrounding mass inward. The holes may be drilled by hand in the manner usual in stone-quarries, where one man holds a long chisel in position, while one or two companions strike it. After each blow the chisel is rotated through a small angle. More rapid progress is obtained by using drills actuated with compressed air or electricity. The holes are then cleaned and charged with an explosive cartridge, to which is attached a length of

slow-burning fuse. An electric arrangement however has the advantage of allowing a greater number of shots to be fired simultaneously, while there is no 'hanging fire' and seldom any 'miss-fire'; moreover, the shots can be fired from any distance.

One of the most serious difficulties that presents itself to the sinker arises when a bed of water-logged sandstone or sand is encountered at some depth in the shaft. In sinking through the Triassic and Permian rocks on the eastern side of the great Northern and Yorkshire coalfields, enormous trouble has been caused by a thin bed of quicksand at the base of the Permian rocks—3000 gallons of water per minute having been encountered in the Monkwearmouth shafts. Such an amount of water if allowed to descend the shaft would impose a very grievous burden on the pumping-plant, so must be held back by means of tubbing. Nowadays tubbing takes the form of heavy cast-iron plates, each of which is strengthened with ribs and brackets on the side facing the rock, provided with flanges to facilitate fitting, and pierced with a central hole. The first ring of tubbing-plates is laid on a wooden foundation placed on some strong bed of rock below the watery stratum; the tubbing is then built up ring by ring as far as a similar bed above the watery zone, and finished with a wooden curb wedged tight against the rock above. All the joints between the

iron plates are then wedged up tight, beginning at the bottom. The hole in each plate, at first left open to allow any imprisoned air to escape, is then plugged with wood, and the space behind the tubing filled in with concrete. A vent-pipe is sometimes inserted in the upper ring of plates and carried some way up the shaft, to avoid dangerous air-pressure. In this way not only may a heavy feeder of water be kept back, but the drying-up of surface-wells, streams and springs is avoided, to the no small advantage of the inhabitants.

Sometimes in dealing with hard beds that yield more water than can be kept under by the pump, the Kind-Chaudron system is adopted. The shaft is bored out, first of small diameter, then to the full size, on the percussion principle (p. 73) with a heavy circular cutting-tool or trepan, operated from the surface, during which process no pumping is done. As the boring advances, cast-iron permanent tubing is lowered down the shaft. The bottom ring of the tubing is fitted with a sliding case packed with moss or oakum, which is so compressed between the tubing and the rock below that a water-tight junction is secured. The water is then pumped out, and the space behind the tubing filled in with cement.

Some of the deepest shafts in this country are those of the Florence Colliery at Longton in North

Staffordshire, which reach the Yard Coal at the enormous depth of 2490 feet (830 yards); while the Ashton Moss shafts near Manchester are 2880 feet, or over half-a-mile, deep.

It is usual to carry the shaft a few yards below the lowest coal to be worked, so as to afford stand-age for the water. This extension is known as the sump; and from it the pumps lift the water to the surface. The seam being reached, much remains to be done before coal-getting can be commenced. In order to afford a firm foundation for the shafts, and so to avoid collapse and damage to the surface-plant, a considerable area of coal known as the shaft-pillar, the size of which will depend on the depth of the seam, the goodness of the roof and floor, and the hardness of the coal, must be left unworked around each shaft in every seam. In a seam 300 yards in depth the shaft-pillar should have a diameter of at least 90 yards. It is usual to place the two shafts within say 100 yards of each other, so as to allow of the surface-plant (engine-houses, offices, etc.) being concentrated; but they must not be less than 15 yards apart. The one by which the ventilating air-current ascends is called the up-cast shaft; the other, by which fresh air descends, is the downcast, and is usually the one by which the winding is done. As soon as the shafts reach the seam to be worked, a communicating passage

must be cut in the coal from one to the other, so as to establish the ventilating current.

*Driving Levels.*—The next points for decision are the system on which the coal is to be worked, and the direction to be given to the main roads or levels, by which the shafts will communicate with the most

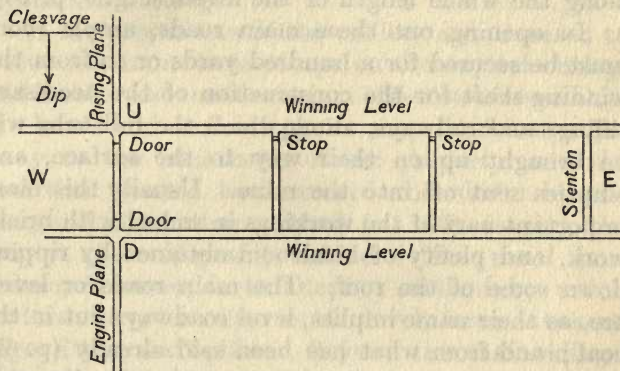


Fig. 8.—Plan showing upcast and downcast shafts *U* and *D*, pairs of winning levels advancing eastward and westward, a rising plane going north, and a dipping plane (engine-plane) going south.

distant parts of the mine, and by which men and boys, horses, trams, air and materials will constantly go to and fro or, as the miner terms it, 'inbye' (from the shafts into the workings) and 'outbye' (out of the workings and toward the shafts). Levels are usually driven out from the shafts on both sides,

parallel to each other, in pairs or triplets, with a rib of coal 20 yards or so wide between them. As they advance, cross-headings (stentons) are cut from one to the other every 30 or 40 yards; and as a fresh stenton is cut, the previous one is closed with a stopping, so as always to maintain an air-course along the whole length of the levels (Fig. 8, p. 87).

In opening out these main roads, ample room must be secured for a hundred yards or so from the winding-shaft for the construction of the necessary sidings and railways, along which the full tubs will be brought up on their way to the surface, and empties sent off into the mine. Usually this most important part of the workings is arched with brick-work, and plenty of headroom obtained by ripping down some of the roof. The main roads or levels are, as their name implies, level roadways cut in the coal; and from what has been said already (p. 67) they must, in an inclined seam, take the direction of the strike, and cross the direction of dip at right angles. Also, they usually coincide with the cleat or main set of joints in the coal. They are not, however, made perfectly level, but are given a slight inclination of about 1 in 130, so as not only to cause the water to flow back to the shaft, but also to assist the loaded trams in their journey thither. They are usually driven 7 to 10 feet wide and 6 or 7 feet high.

Where the seam has a considerable inclination, inclined planes must be driven in the coal, at right angles to the main levels, one toward the rise, and another toward the dip—the latter being known as the engine-plane, since the coal from the dip-workings will be pulled up this plane by some system of mechanical haulage.

If the proprietors of the colliery are prepared to waive any immediate return on the capital outlay, and if other circumstances (pp. 105–6) are favourable, the levels and inclined planes may be driven right away to the boundaries of the property, and the coal then worked back toward the shafts by the Longwall Retreating method (p. 105), leaving the empty space ('goaf') behind. The usual procedure, however, is to adopt a method by which coal can be got as soon as the levels have advanced beyond the shaft-pillar. Beyond the shaft-sidings, the main roads are not so roomy and are not usually arched with brickwork; but as it is essential that they should be kept free from obstruction, their roof and sides are supported with stout timbers, unless the roof should be strong enough to render this unnecessary. A soft shale roof at a great depth, and a soft coal in the sides, require much timber and need constant attention and repair. A very usual arrangement is to place at frequent intervals two upright posts, usually of pine, fir or larch, and

about 6 inches in diameter, one on each side of the level, and slightly inclined toward each other at the top, with a thicker crown-piece or lintel laid across them. Much pit-wood is imported from Norway and Sweden. Owing to the moisture and warmth of the air underground, the timber is subject to rapid decay, to prevent which various chemical treatments such as creosoting have been introduced.

*Driving through Faults.*—After a level has been driven in the coal for some distance, it may encounter a fault (pp. 65-7), by which the coal is thrown out of sight, and has to be sought for; and it is important to grasp the principles on which this search is based. The fault may be a clean-cut fracture with no appreciable space between the end of the coal and the beds beyond; or it may be marked by a variable thickness of 'fault-rock,' *i.e.* layers of shattered and powdered rock and coal-dust (the 'leader' of the fault), jammed between the two cheeks of the fracture. It has been explained already (p. 67) that in normal faulting, such as is usually met with in our coalfields, the fault dips toward the downthrow side. If, therefore, the pitman in driving a level meets with a fault that dips away from him, and forms an obtuse angle with the roof of the level, he assumes that on the other side of the fault the coal has been thrown down. He may now attempt to reach the coal by one of several



methods. If the beds are approximately horizontal, he must give his excavation through the measures

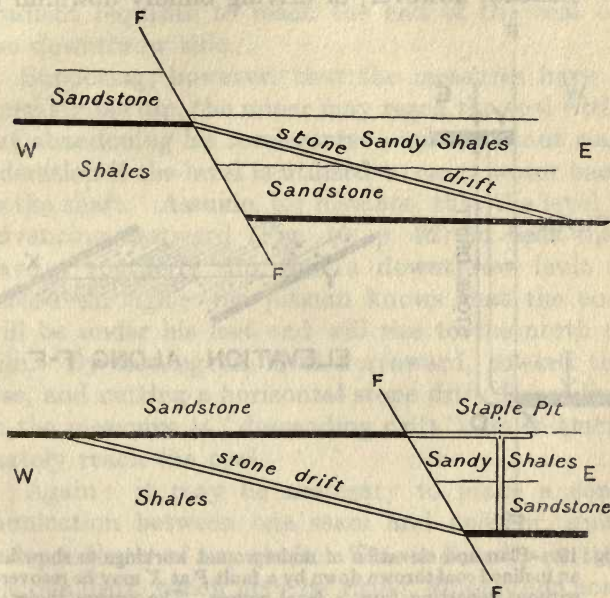


Fig. 9.—Sections showing methods of recovering the coal beyond a downthrow fault *F*, in horizontal or low-dipping beds. The drivage in the coal is proceeding eastward.

beyond the fault a regular downhill gradient suitable for haulage, and continue it till it cuts the coal on the downthrow side, as in the upper section in Fig. 9.

Such an excavation is called a stone drift, as it is cut through stone and not coal.

Instead, however, of driving blindly downhill to

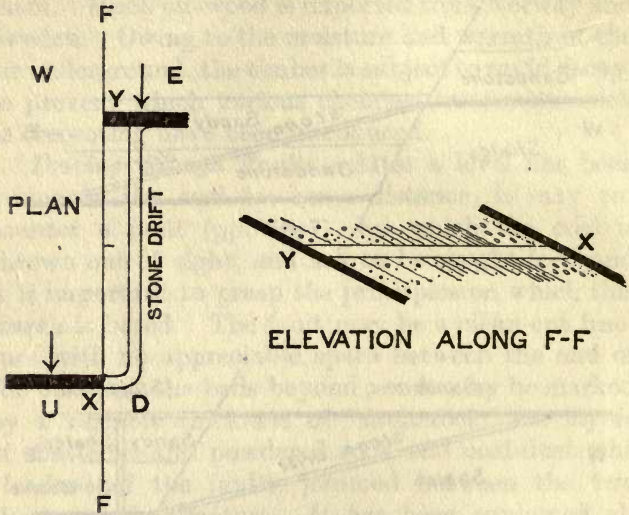


Fig. 10.—Plan and elevation of underground workings to show how an inclined coal thrown down by a fault *F* at *X* may be recovered without departing from a level course. The arrows show the direction of dip. The elevation, taken along the fault, shows that a horizontal cross-measure or stone drift from the coal on the upthrow side at *X* will reach the coal on the downthrow side at *Y*. *U*, upthrow side of fault; *D*, downthrow side.

reach the coal, as in the case just described, he would do better to carry the level forward a few yards beyond the fault, and then put down a borehole, or

sink a 'staple-pit' (as in the lower section in Fig. 9), till the coal was reached. He would then go back along his level and cut a stone drift with a downhill gradient requisite to reach the end of the coal on the downthrow side.

Supposing, however, that the measures have a considerable dip, the miner may reach the coal without abandoning his level-course—an important consideration if the level is utilized to carry water back to the shaft. Assume, for instance, that the level is advancing eastward (Fig. 10, p. 92) in beds that have a southerly dip, and a downthrow fault is passed through; the pitman knows that the coal will be under his feet and will rise to the north of him. By turning his level northward, toward the rise, and cutting a horizontal stone drift descending in the measures (a 'descending drift'), he will ultimately reach the coal.

Again: it may be necessary to make a communication between one seam and another, quite independently of any shaft. This is done by cutting a stone drift, which may be rising, dipping, or horizontal (Fig. 7 C, p. 79). Driving a stone drift usually requires the assistance of blasting operations, which are conducted in much the same manner as in shaft-sinking (p. 83).

*Old Workings.*—In driving out levels or working-places toward old workings, great care must be

exercised lest the water or gas, with which they may be charged, be suddenly tapped and let into the new workings. On approaching old mines, horizontal boreholes are driven forward in the coal, with others going off at angles ; and the exploring heading must not have less than 5 yards of straight-on boring ahead of it. If a boring taps water or gas, it must be at once closed with strong wooden plugs, and in that direction no further driving must be attempted. Lack of information as to the situation of old workings is often a cause of much anxiety to the colliery officials. If much water makes its way into the workings from abandoned mines, it may be necessary to dam it off. If the water is under no great ' head,' stout wooden battens like railway-sleepers, laid one above another so as to make a wall, are inserted in grooves cut into the two sides of the heading. At a foot or so in advance of the first, a second wooden wall is erected. The space between the two is then tightly packed with clay, which will form a watertight barrier. If, however, the water to be excluded exerts a great pressure, a wooden or a brickwork dam is constructed in the form of an arch laid on its face, with the convex curve of the arch toward the water.

## CHAPTER VII

## WORKING THE COAL

WHEN the shafts have reached the coal intended to be worked, and the winding-engines and ventilating arrangements have been installed, the shaft-sidings and shaft-pillar laid out, and the main levels and inclines driven forward, the colliery will be in a position to begin working the coal; and a method of work must be decided upon that will produce the largest amount of marketable fuel at the least cost and with the greatest safety to the men. The choice will depend on the character and thickness of the seam, its depth and inclination, and the nature of its roof and floor.

*Methods of Working.*—The usual methods, although capable of numerous modifications and combinations to suit special conditions, are:

(1) *Bord-and-Pillar*, otherwise called *Bord-and-Wall*, *Pillar-and-Stall*, *Post-and-Stall*, *Stoop-and-Room*.

(2) *Longwall*.

A description of several other less usual methods, such as the *Single-road Stall* and the *Double-road Stall* systems of South Wales, the *Wicket* system of North Wales, and the *Hill* system of Warwickshire, would carry us beyond the purview of the present

volume ; but a brief account of the Square-work of South Staffordshire will be given.

In Bord-and-Pillar working (Fig. 12, p. 99), which is doubtless the earliest and most obvious method, and is the usual one in Northumberland and Durham, the procedure consists, first, in removing the coal from two sets of working-places, called bords and headways, driven at right angles to each other, and forming between them rectangular pillars of coal sufficiently large to support the roof. This operation is known as 'whole-working,' *i.e.* working in the whole or unbroached seam ; and in earlier days the pillars so formed were abandoned in the mine as soon as the boundaries of the property were reached, as it was found impossible to remove them with safety. In modern practice, however, a second operation, known as 'broken' or pillar-working, is performed, by which the pillars themselves, purposely left large at the whole-working, are removed more or less completely.

In Longwall working (Fig. 13, p. 104), prevalent in Yorkshire, Derbyshire and the Midlands, the whole of the coal is removed at one operation along a continuous face or 'wall,' the overlying strata being allowed to settle down in the vacuity ('goaf' or 'gob') behind. This system may be worked either as (*a*) 'Longwall Advancing,' *i.e.* working away from the shafts and toward the boundaries,

or (b) 'Longwall Retreating,' *i.e.* working back from the boundaries toward the shafts.

*Bord-and-Pillar.*—In Bord-and-Pillar working, the 'whole' working is carried out by driving one

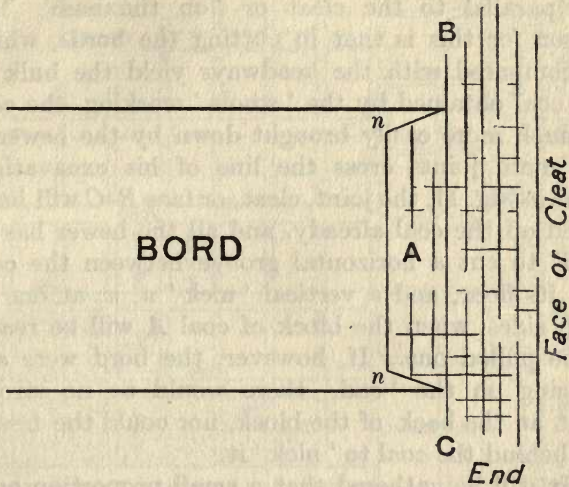


Fig. 11.—Plan of a bord advancing on the 'face' of the coal. The block of coal *A* having been undercut, and 'nicked' at the sides (*n, n*) as far as the 'face' *B—C*, can readily be removed.

set of wide excavations called bords, which yield the bulk of the coal, and another narrower set at right angles called headways, which are used mainly for ventilation. The two sets between them form rectangular pillars of coal, to be removed by the

'broken' working later on. The bords (4 to 7 yards wide) are usually driven wider than the headways, and are generally cut across the cleat or 'on the face'; the headways (2 to 4 yards wide) are parallel to the cleat or 'on the end.' The reason for this is that in cutting the bords, which as compared with the headways yield the bulk of the coal obtained by the 'whole' working, the coal is much more easily brought down by the hewer if the main joints cross the line of his excavation. Thus in Fig. 11, the joint, cleat, or face  $B-C$  will have sliced off the coal already, and all the hewer has to do is to cut a horizontal groove between the coal and its floor, and a vertical 'nick'  $n, n$ , at one or both sides, when the block of coal  $A$  will be ready to be pulled out. If, however, the bord were advancing on the 'end,' there would be no strong joint at the back of the block, nor could the hewer get behind the coal to 'nick' it.

It will be gathered that a small proportion only of the coal is obtained by the 'whole' working (5 to 30 per cent.): the bulk of it is left in the pillars.

The manner in which the coal is hewed is as follows. The hewer with his pick first undercuts ('holes' or 'kirves') the seam across the full width of the working-place (bord or headway, as the case may be). This horizontal groove will be about a foot wide at the face, but will taper inward to a



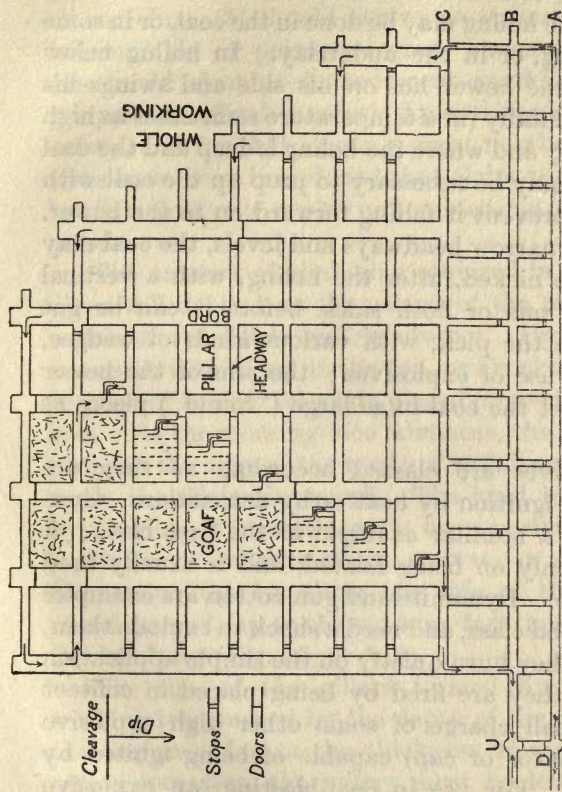


Fig. 12.—Plan showing Bord-and-Pillar working. Three main levels, *A*, *B*, and *C*, are advancing 'level-course' in the direction of the cleavage, while the bords are advancing to the 'rise.' In the north-eastern part of the workings the 'whole' coal is being worked; in the north-western part, the pillars are being worked off in bordway lifts, and the roof is settling down into the goaf. The arrows show the direction of the air-current. *U*, *D*, upcast and downcast shafts. (After C. Pamely.)

knife-edge, and is cut as much as 3 feet under the seam. The holing may be done in the coal, or in some soft parting, or in the underclay. In holing below the coal, the hewer lies on his side and swings his pick horizontally (in a temperature sometimes as high as 80° F. !); and where the holing is deep and the coal tender, it may be necessary to prop up the coal with sprags to prevent it falling forward on to the hewer. In driving narrow headways and levels, the coal may need to be nicked, after the holing, with a vertical groove on one or both sides, before it can be got down with the pick, with various kinds of wedges, or by the use of explosives; the aim of the hewer being to get the coal in as large (‘round’) pieces as possible.

Explosives are classed according as they are capable of ignition by heat or by detonation. Gunpowder is a familiar example of the first class; it explodes only on being heated, and is usually fired with a fuse. Dynamite and gun-cotton are examples of the second class, and need a shock to explode them, although they burn quietly on the simple application of heat; they are fired by being placed in contact with a small charge of some other high explosive (the detonator or cap) capable of being ignited by electricity. For use in coal-blasting, an explosive (1) should be safe when handled or carried about, (-) should give off as small and as brief a flame as

possible, and so be not liable to ignite fire-damp or coal-dust, (3) should evolve no serious volume of inflammable or poisonous gases on explosion, and (4) should eject no incandescent sparks. Common gunpowder offends against three of these canons of safety, and for that reason a great number of explosives have been introduced that claim to be more or less flameless, or to evolve no combustible or poisonous gases.

The amount of timbering required in a working-place will depend on the nature of the roof and the width of the bords and headways. Upright props are used, with a cap at the top, or chocks, consisting of piles of horizontal posts placed crosswise two and two. As the working-face advances, the chocks and props at the edge of the goaf are withdrawn and used again if sufficiently sound. The bord is ventilated by dividing it into two parts by a vertical air-tight partition of brattice-cloth, canvas, or wood, and conducting the air along one side of the brattice, round its end, up to the working-face, and back into the headway (Fig. 15, p. 115).

The size of the pillars formed by the whole-working is governed by the depth of the seam below the surface; for as the thickness of the overlying strata increases, the pillars must be left larger to prevent their being 'crushed' to useless slack; further, if the coal is soft, the pillars need to be

larger than if the coal were harder ; and if the roof and floor are soft, the pillars must be large enough to prevent 'creep,' *i.e.* bulging-up of the floor of the excavations (p. 29). It is customary nowadays to leave pillars 20 to 50 yards long and 10 to 40 yards wide.

The second operation in the bord-and-pillar method is the 'broken' working, or removal of the pillars. This may be deferred till the whole-working has reached the boundaries, but is usually commenced soon after the whole-working has attained a safe distance from the shafts, and follows up the advancing whole-work at a convenient distance, if possible before the roofs of the bords and headways have fallen in, the empty space or goaf left by the pillar-working being utilized for the stowage of rubbish and allowed to fill up by the settling-down of the roof.

There are innumerable methods of removing a pillar. The system generally pursued is that of taking off bordway slices ('lifts') driven halfway along the pillar from each headway ; or in the case of long pillars, by driving a narrow heading across the middle of the pillar, and then carrying lifts right and left from this as well as from the headways. In working the pillars a regular line of advance (generally making  $45^{\circ}$  with the headways) should be maintained between the goaf on the one hand and

the unworked pillars on the other, special care being taken to avoid leaving a pillar or a stump of coal behind in the goaf, as its removal would then be attended by much risk and difficulty. Pillar-working requires the roof to be specially well timbered.

*Longwall.*—In Longwall Advancing (see upper part of Fig. 13, p. 104), as soon as the boundaries of the shaft-pillar have been left behind, the removal of the coal along a continuous face or 'wall' can be begun. The face may be more or less straight, or stepped, according to the nature of the cleat, and sometimes extends for a mile in length. The coal is undercut as in bord-and-pillar work, but machine cutters are sometimes employed. The lower edge of the undercut coal is held up by sprags, and the roof is upheld by chocks. As the face advances, the timbering is moved forward with it, whereupon the roof behind falls, and fills up the goaf. Communication with the shafts is kept up by maintaining stone-walled passages (gateroads), at least 6 feet wide, from the face through the goaf, the necessary stone being obtained from the roof or floor. The walls of the passages are called packwalls, and should be well and solidly built, and at least 6 feet thick. As the gateroads become longer and the expense of keeping them in order becomes serious, one or two chief roads are maintained, from which cross

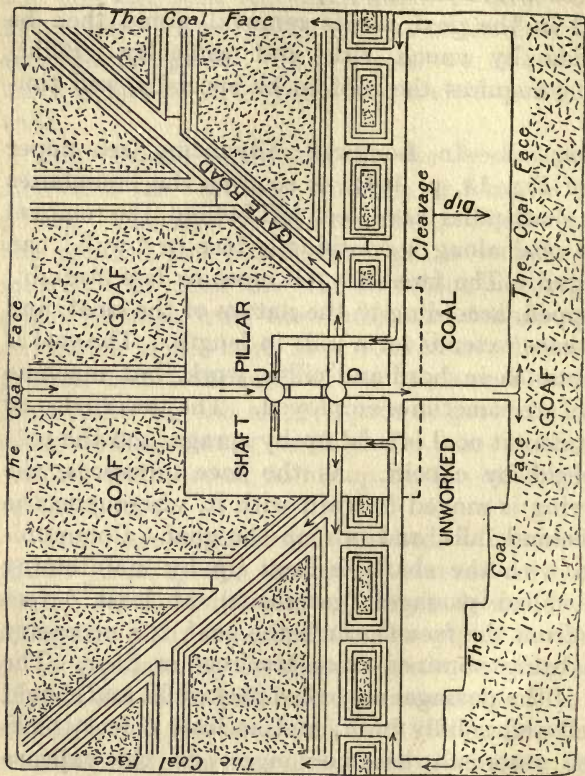


Fig. 13.—Plan of Longwall working, advancing northward to the rise and retreating northward from the dip. The gateroads through the goaf are lined with packwalls.

gateroads are constructed up to the face, and the old roads abandoned. A well-stowed goaf assists materially in the maintenance of the gateroads, and diminishes the timbering required.

In Longwall Retreating (see lower part of Fig. 13, p. 104), a method of working that may be adopted where an immediate yield of coal is not essential, the levels, airways, roads, etc., are driven out from the shafts to the boundaries, whence the coal is worked back toward the shafts by a longwall face. The roof settles down behind. The gateroads are thus all in the unworked coal, so that there are no roads to be maintained through the goaf.

The respective advantages of the two kinds of longwall working depend much on circumstances; but the retreating method has the superiority that if in a seam that is liable to spontaneous combustion a gob-fire should break out, the danger is left behind and does not come between the working-face and the shafts.

Gob-fires are brought about through spontaneous combustion of the slack and coaly refuse left behind in the gob or goaf, and are caused probably by the oxidation of the finely-divided carbonaceous matter, assisted maybe by the presence of pyrite. In some cases heat due to pressure and movement has set up spontaneous combustion in the seam itself, as in the case of the Thick Coal at Hamstead in South

Staffordshire, which is being worked at a depth of over 2000 feet.

Comparing bord-and-pillar with longwall work, it may be pointed out that the latter is not applicable to areas underlying water—such as the sea, rivers, lakes, and reservoirs; nor can the removal of pillars on the bord-and-pillar system be applied to districts occupied at the surface by buildings in respect of which compensation for damage would be demanded. Bord-and-pillar is best applied where the surface must remain supported by the pillars; longwall yields the largest percentage of large coal, is more easily ventilated, is generally less costly, and is gradually superseding bord-and-pillar.

*Square-work.*—In working the Thick Coal of South Staffordshire, which varies from 14 to over 30 feet in thickness, and is liable to spontaneous combustion, the method known as Square-work has been evolved. The seam is divided into a number of rectangular compartments, 50 yards or more in the side, called 'sides of work,' separated from each other by ribs of coal ('fire-ribs'), 8 or 10 yards thick (Fig. 14, p. 107). Access to the sides of work is gained by one or more 'bolt-holes,' opened out from the main roads or gate roads cut in the lower layers of the coal. The coal is then removed from within each side of work, leaving a vast gloomy chamber in which six or more pillars remain to



support the roof. The pillars are then pared down as far as is safe, and the bolt-holes finally sealed up to prevent spontaneous combustion. In order to get

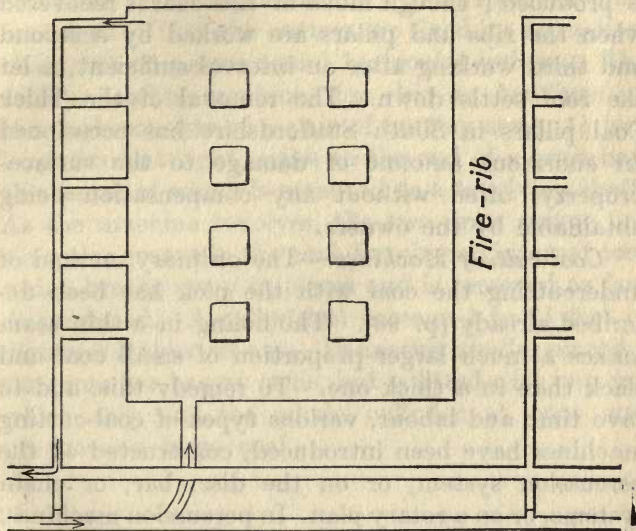


Fig. 14.—Plan showing a 'side of work' in the Square-work method of getting the Thick Coal of South Staffordshire. The arrows show the direction of the air-current.

at the upper layers of the coal, the hewers stand on the coal and slack already cut, or on light scaffolding. No roof-timbering can be employed, and the work is attended with great danger from falls of roof. Sometimes all the coal is extracted in two lifts or

layers at intervals by a system of longwall work. But after this first working 38 to 46 per cent. of the coal is left underground, and a large amount of slack is produced ; though much of this coal is recovered when the ribs and pillars are worked by a second and third working after an interval sufficient to let the roof settle down. The removal of the Thick Coal pillars in South Staffordshire has occasioned an enormous amount of damage to the surface-property, often without any compensation being obtainable by the owners.

*Coal-cutting Machines.*—The ordinary method of undercutting the coal with the pick has been described already (p. 98). The holing in a thin seam makes a much larger proportion of small coal and slack than in a thick one. To remedy this, and to save time and labour, various types of coal-cutting machines have been introduced, constructed on the percussion system, or on the disc, bar, or chain systems, or on a rotary plan. In percussion machines, the cutting-tool is a chisel-ended bar, which is lunged forward against the coal-face at the rate of 200 or more blows a minute, rotating at the same time ; and by swinging the tool slowly along, the hewer cuts a groove in the coal-face. The disc-machines, specially applicable to longwall faces, consist essentially of a disc or wheel, 5 or 6 feet in diameter, armed with cutters, somewhat like a circular saw but on a

vertical axle. In the bar-machines, the cutter is a toothed bar or roller, which is caused to rotate, at 200 to 500 revolutions per minute, against the coal-face. The chain-machines differ from the disc-machines in that the cutters are fixed on an endless chain, which passes round horizontal pulleys. The rotary heading-machine, for driving headings in the coal, consists of a pair of cutting-arms,  $4\frac{1}{2}$  feet long, fixed at right angles to the end of a cross-bar, the centre of which is attached to a revolving shaft. As the machine revolves, the two arms scrape out a circular groove in the coal, forming an internal core which breaks away in pieces and is removed as fast as produced. A cylindrical passage 4 to  $7\frac{1}{2}$  feet in diameter is thus cut out. In another similar machine the cross-bar has no arms, but is fitted with cutters, which chip out the whole cylinder at once and produce no large coal.

## CHAPTER VIII

### VENTILATION, DRAINING AND LIGHTING

*Ventilation.*—It will readily be gathered that the atmosphere of a mine speedily becomes vitiated by the breathing of men and horses, the burning of lights and explosives, by gases—explosive or

poisonous—given off from the coal or evolved by gob-fires, and by the coal-dust diffused in the air ; and it is essential that this foul air should be continuously and steadily swept out of the mine and replaced by fresh. The fresh air required varies from 100 to 500 cubic feet a minute per person employed in the mine, according to whether the mine is free from gas, or is fiery.

The chief gas evolved from the coal is fire-damp (methane or marsh gas,  $\text{CH}_4$ ), the specific gravity of which, compared with air, is  $\cdot 559$ . It was produced probably during the conversion of the original vegetable matter into coal, and remains locked up under pressure within the pores of the coal till liberated in considerable volume when the seam is broken into at the face, whence it may sometimes be heard to issue with a slight hissing sound. Occasionally it jets out from joints and fissures in exceptionally large volumes known as 'blowers' and 'outbursts.' The gas is colourless, tasteless and odourless, will not support life or combustion, but burns with a blue flame. If present in air to the extent of 9·5 per cent. the mixture will explode violently, producing carbon dioxide ( $\text{CO}_2$ ) and water-vapour, which, with the residual atmospheric nitrogen, forms a mixture incapable of supporting life and constituting the deadly 'after-damp' of explosions. Being so much lighter than air, fire-damp

rises to the higher parts of the workings. It accumulates in the goaves, whence on a fall of the barometer it is liable to issue in dangerous quantities. Its presence in the air of a mine to the extent of only 2 or 3 per cent. causes a blue cap to appear over the flame of the Davy-lamp, the cap increasing in size with the percentage of gas till the lamp is filled, or the mixture explodes.

Carbon dioxide (choke-damp, black damp, stife,  $\text{CO}_2$ ) is produced by the breathing of men and animals and by the complete combustion and slow oxidation of carbon compounds. As we have seen, it is one of the products of the combustion of fire-damp. Being 1.529 times as heavy as air, it accumulates in the lower parts of the mine. It is incombustible, and a non-supporter of life and combustion. Less than 15 per cent. of carbon dioxide in air causes drowsiness when breathed, and in larger quantities the gas is fatal.

Carbon monoxide (sweat-damp, white damp,  $\text{CO}$ ) is produced by the incomplete combustion of carbon compounds (as in gob-fires), by explosives, and by explosions of fire-damp. Its specific gravity is .967; it is combustible, but will not support combustion. Its worst character is its actively poisonous effect on the blood, so that even 1 per cent. is fatal; and unfortunately this percentage, as it does not affect the combustion of a candle, gives no warning of its

presence. Those who have succumbed to it acquire an unnatural ruddiness of the complexion.

Hydrogen sulphide (stink-damp,  $H_2S$ ) is produced by the decomposition of iron pyrite ( $FeS_2$ ) in the presence of moisture. Its specific gravity is 1.171; it is combustible, but a non-supporter of combustion or life. Its well-known smell—of rotten eggs—enables it easily to be detected, and even 1 per cent. of it in air is injurious to breathe, though such air will support combustion.

Such then, together with the coal-dust, are the chief impurities that vitiate the air of a coal-mine. The carbon monoxide is the most poisonous; but fire-damp, on account of its abundance and the danger of its exploding, is most to be feared, though as a source of danger coal-dust approaches it very closely. After an explosion, the oxygen essential to respiration has been burnt up more or less completely, to form carbon dioxide, carbon monoxide and steam; so that those who have escaped death by direct shock or burning are cut off by asphyxiation or poisoning. The mechanical effects of an explosion are not only disastrous to the men, but destructive to all impediments in the way of the expanding gases; doors, stops and air-crossings are blown out, tubs are upset, props are thrown down, and the shaft-fittings and winding-gear deranged, with the result that heavy falls of roof are produced and the

ventilating current short-circuited or stopped. Thus the usual means of clearing the air are rendered unavailable, and access to the scene of the disaster may be for a while impossible.

Experiments go to show that air charged with coal-dust is itself explosive, while as little as 2 per cent. of fire-damp in air is enough for explosion, provided that the air is dusty. A dry, dusty and fiery seam is always dangerous. But by sprinkling the roads with water, and by using only those explosives which give out as little flame as possible, by strict attention to the safety-lamps, and by maintaining a generous current of air, these risks may be greatly reduced. But a sudden blower of gas, which may for a while overpower the ventilation and render the atmosphere highly explosive, is always to be feared, and under the best of circumstances remains, a grim spectre in the background, ready to leap forth and deal out death and destruction at the first opportunity.

Some few mines are still ventilated by the natural current set up by a difference of density of the air in the two shafts, usually consequent on their being of unequal depth, temperature or dryness; but as such a current, never very powerful, is apt to cease altogether at changes of the season's temperature, this natural ventilation is usually replaced by furnaces and exhausting-fans.

*Furnaces.*—The ventilating-furnace, in which a roaring coal-fire is kept burning, is placed near the bottom of the upcast shaft, so that the latter becomes a huge chimney up which a continuous and powerful draught is maintained. It is insulated from the coal on each side by a brickwork arch and walls. The return air (*i.e.* the foul air returning from the workings) passes through, over, and by the side of the fire, and so up the shaft. If however this return air is so charged with fire-damp as to be liable to explosion at the furnace, it is carried up an inclined 'dumb drift' instead of past the fire, and enters the shaft 50 or 60 feet above the bottom; and air sufficient to maintain combustion is led to the furnace direct from the downcast shaft. A furnace should be capable of producing a current of 6000 cubic feet per minute for each foot of breadth of fire-bars.

*Fans.*—Exhausting-fans are placed on the surface near the top of the upcast shaft, and connected therewith by an air-tight brickwork passage—the shaft-top being closed. They are usually made on the centrifugal principle. As the fan rotates at a high velocity (up to 300 revolutions per minute), the air tends to be thrown out towards the periphery by the vanes, and so produces a low-pressure area round the axis. If therefore this axis of the fan is open to the upcast shaft, and the periphery to the outside air, a continuous current will be set up, and



the air thus sucked up the one shaft will produce a corresponding influx at the other. Centrifugal fans, such as the Guibal, Waddle, Schiele, and Capell fans, are capable of producing currents of over 200,000 cubic feet a minute.

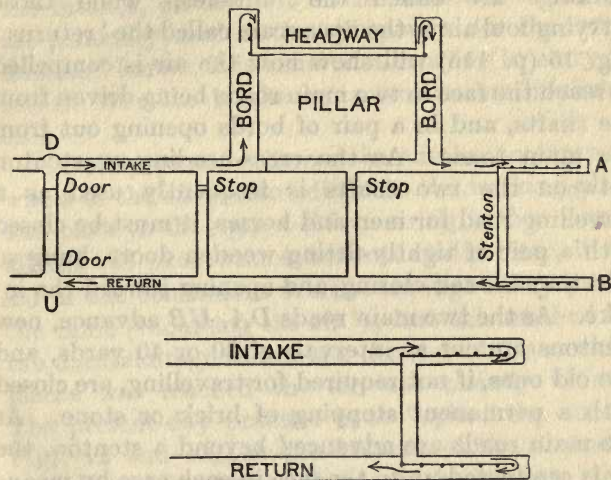


Fig. 15.—Plan showing method of ventilating a pair of winning levels and two bords. Below is an enlarged plan of the ends of the levels showing bratticing. The arrows show the direction of the air-current.

*Distribution of Air.*—The distribution of air in the mine must now be considered. If left to its own devices, the air would go direct from the

downcast shaft by the shortest cut to the upcast. To prevent this, it is guided by various stoppings and doors, and not allowed to reach the upcast till it has gone the whole round of the workings. Those passages used for carrying fresh air into the workings are called the 'intakes,' while those carrying foul air to the upcast are called the 'returns.' Fig. 15 (p. 115) will show how the air is compelled to reach the face in two main roads being driven from the shafts, and in a pair of bords opening out from the main roads. As the cross-heading or stenton between the two shafts is frequently used as a travelling road for men and horses, it must be closed with a pair of tightly-fitting wooden doors, hung so that they are self-closing, and opening toward the intake. As the two main roads *DA*, *UB* advance, new stentons are cut at intervals of 30 or 40 yards, and the old ones, if not required for travelling, are closed with a permanent stopping of brick or stone. As the main roads are advanced beyond a stenton, the air is conducted up to the face in each case by means of canvas or wood bratticing (p. 101). Thus by driving out the winning headings in pairs or triplets, a complete air-current can be maintained right up to the face. Stone drifts, however, are usually driven singly, and must be ventilated by a brick-work brattice, or by carrying the air in wooden pipes (air-boxes) or iron tubes, along which it can

conveniently be forced by small electrically driven fans placed at suitable intervals.

In the various complications of a mine it is frequently necessary to carry one airway across another by what are called air-crossings ; and since the intakes, on account of the freshness of the air, are generally used as travelling ways for the trams, men and horses, it is usual at a crossing to carry the return over the intake by a wooden or brickwork arch.

In early practice it was the custom to carry the whole of the air-current direct to the working-places and back to the upcast (‘ face-airing ’), thus leaving all the old excavations unventilated ; later, it was led in one continuous current through every part of the mine (‘ coursing the air ’) ; but this method had the disadvantage that when the last of the working-places was reached the air was already vitiated. The present-day practice is to ‘ split ’ the air (see Figs. 12 and 13), at the bottom of the downcast, into several intakes, each of which is taken, direct to its own district or panel, along the main travelling road ; and after each split has done its work it rejoins the others near the bottom of the upcast. To prevent the nearer districts taking more than their share, the current is regulated by sliding doors placed across the returns.

The ventilation of a mine worked by bord-and-

pillar is a very complex affair, necessitating a large number of stoppings, doors and brattices (Fig. 12). The air for each district is usually carried up the leading roadway to the most advanced working-place, where it splits and goes right and left; but instead of going back at once by the return it is guided by stoppings and brattices into every working-place and along most of the roadways. The long distance travelled by the air requires a powerful driving-force, and a constant watch against short-circuiting.

In longwall working the ventilation is much simpler and requires fewer stoppings, doors and brattices. The air is carried up the middle gate road to the face, where it splits, travels right and left along the face, and then goes back to the return. The shorter distance travelled by the air needs a less powerful driving-force.

*Drainage.*—The water almost invariably present in the pervious conglomerates, grits and sandstones of the Coal Measures, down to a depth of 300 or 600 feet, has always constituted a heavy burden on mining enterprise, and in many districts for long periods effectually crushed it. The water so encountered in a pervious bed is of course derived in the first instance from the rain that falls on the outcrop, whence it passes down in the direction of the dip, and is ready to pour into any shaft that

reaches that particular stratum. Impervious shales and clays, on the contrary, hold little water, and a coal worked under a cover of such rocks is usually dry. Some of the deepest pits are the driest, owing to the tubbing-off of the overlying wet strata encountered in sinking (pp. 84-5). Where tubbing has been carried out properly, little water need make its way down the shaft; but if a water-laden bed is faulted-down in the workings and has to be driven into, it may give rise to a troublesome and even dangerous feeder of water. Similar difficulties may arise through a heavy fall of impervious roof letting the bottom out of some overlying water-logged bed. In working the Shallow Coal at Brereton (South Staffordshire) in 1908 a thin bed of impervious clay, which separated the coal from the water-logged Trias above, suddenly collapsed; water poured into the mine, drowned several men, and flooded the workings.

A very simple problem of draining is presented by a seam of coal that crops out on relatively high ground, such as the side of a hill (Fig. 1, p. 9), and at the same time dips toward the lower ground. Here the day-level *A*, by which the coal is worked, will also serve as a drain. But on the western side of the valley in Fig. 1 the workings would soon fill with water. To drain them a drainage-tunnel (adit or sough) is driven in from the bottom of the valley, with the slightest possible upward inclination, till

it meets the coal, in which a heading can then be driven level-course till it intersects the slant driven in the coal from the outcrop. The coal can then be worked in such a manner that the workings will drain themselves by the adit. Beyond the adit, however, the limit of free or natural drainage is reached; and any further workings toward the dip ('dip-workings') are impossible without resort to artificial means of removing the water.

Only in districts trenched by deep valleys that cut through the coals, such as the Forest of Dene and the Pennant country of South Wales, can such methods be applied; and in most of such districts the limit of free drainage has long been passed, and the water has all to be raised by shafts.

Water may be raised up the shaft by either winding or pumping. By the first method, a water-tank fitted with an inlet-valve is fixed in or under the cage. The tank is lowered into the water of the sump, where it fills itself by the valve in the bottom. It is then wound to the surface, where a simple self-acting contrivance opens an outlet-valve in the side, upon which the water pours out into a channel ready to receive it. But unless a subsidiary shaft can be turned to account for water-winding, lift-pumps or force-pumps are usually employed.

When dip-workings descend below the level of the shaft-bottom, the water must be conveyed in some

way to the sump before it can be lifted or forced to the surface by the pumps. A syphon may be employed where the intervening height over which the water has to be conveyed does not exceed about 25 feet. Compressed air or steam can be used to work a pump placed in the lowest workings, or hydraulic pumps and oil engines may be used ; but electrically-driven pumps are specially convenient for this work, and are now usual.

The engine employed to give motion to the pump-rod of a lift-pump is necessarily placed at the top of the shaft ; and as has been pointed out (p. 17), the first steam-engine was constructed for the express purpose of pumping water from mines. The old Cornish pumping-engine as developed by Watt, with its complicated mechanism and huge beam, from the end of which depended the pump-rod, is now seldom seen ; and the water in a modern colliery is usually raised by force-pumps placed in the workings and supplied with steam generated at the surface, though electric centrifugal pumps are now installed at many mines. In parts of the South Staffordshire Coalfield a system of general drainage has been established to unwater the mines. Large pumping-stations have been set up, and are maintained by a charge of a few pence per ton levied on all the coal raised at all the collieries in the district.

*Lighting.*—The methods to be adopted for lighting

the mine depend on the presence or absence of fire-damp. In its absence, naked lights can be employed. At the shaft-bottom or sidings, where there is much traffic and a good light is necessary, gas-jets or large oil-lamps are convenient; for travelling along the main roads portable oil-lanterns can be used; while at the working-face tallow candles are handy, as they can be set upright in a lump of clay placed in any position required. In mines where fire-damp is encountered, naked lights may be admissible at the downcast shaft-bottom, and for some distance along the intake airways, but at a certain point must be exchanged for safety-lamps.

The principle of the safety-lamp (p. 31) depends on the well-known fact that a fine wire gauze if kept cool will reduce the temperature of a flame to a point below that necessary for combustion. Davy applied this principle in his safety-lamp, which consisted of an oil lamp closely surrounded by a gauze cylinder 6 inches high and  $1\frac{1}{2}$  or 2 inches in diameter, and closed at the top with a gauze lid. If such a lamp be placed in a mixture of fire-damp and air, a blue cap appears over the flame and increases in size with the percentage of fire-damp present; but as long as the flame does not make the gauze red-hot, and the lamp is not exposed to a current of such air having a velocity greater than 6 feet per second, the flame burns safely within the lamp and does not ignite



the explosive atmosphere without. With an excessive amount of fire-damp present, however, the whole lamp is filled with burning gas; the gauze becomes red-hot, and the flame will pass through and ignite the mixture outside.

Since the date of Davy's invention in 1815, numerous lamps based on the same principle have been introduced, and designed to give a better light and to be safe in the rapid air-currents maintained in modern ventilation. Many of these, such as the Bonneted Mueseler, the Marsaut, and the Tin Can Davy, are safe in a current of 40 feet per second. In illuminating-power, however, even the best do not attain to half a candle-power.

The safety-lamp supplies in itself a means of detecting the presence of fire-damp in the air of the mine (p. 122); but special fire-damp detectors of great delicacy are now used, the most satisfactory of which are based on the same principle.

Electric light is now largely applied in the surface-buildings and at the shaft-bottom; but in the underground roadways and at the working-face, where falls of roof are liable to damage the insulation, it is risky, and portable incandescent lamps furnished with a small storage battery have been introduced to meet the case. The proper cleaning, trimming, examination and testing of the safety-lamps form a very important part of the colliery management's duty.

## CHAPTER IX

UNDERGROUND HAULAGE, WINDING, AND  
SURFACE-ARRANGEMENTS

*Underground Haulage.*—At the working-face the coal is loaded into small wooden or sheet-iron trucks running on four wheels and known as tubs or trams, their capacity varying from 5 to 20 cwt. Each tub is furnished with a few links of chain at one end and a hook at the other. The wheels are flanged on their inner edge as in an ordinary railway truck, and run on iron rails of small gauge. The underground railways are of various degrees of permanency and solidity. At the face they are light and temporary, so as to admit of being removed and laid down again with ease as the face advances. Along these temporary railways the tubs are pushed by 'putters' or 'trammers' to a convenient point known as a siding, flat or station, where the railway from the face joins a more important road called the horse-road or rolley-way. Here the tubs are made up into a train, which, if the distance is short and the road fairly level, is then drawn to the shaft-bottom by horses. But if the distance is great or the gradient heavy—either down- or up-hill—mechanical haulage is employed. If the gradient outbye has a moderate dip, say an inch in four yards, horses can

pull the loaded tubs down to the shaft ; if much steeper, the tubs would over-run the horses, and the latter can be dispensed with. In such a case the loaded tubs can pull up the empty ones by a self-acting incline. At the top of a straight road leading to the shaft is fixed a drum or pulley furnished with a brake ; round this is passed a rope, to one end of which is attached a loaded train and to the other an empty train. The loaded train being started at the top of the incline descends and pulls up the empties—the pace being regulated by the brake. Two sets of rails can be employed where the road is wide, but otherwise a single line, with a length of double rail at the meeting-place, where the trains pass each other, will suffice. By means of a small easily-moved pulley and brake the same system is employed, at a working-face advancing to the rise, to run several loaded tubs down an incline called a gig-brow to a siding or main road.

In many collieries, however, coal has to be raised from dip-workings that lie far below the level of the shaft-bottom, where gravity can be employed only partially ; or the working-places, although on much the same level as the shaft-bottom, are reached by roads that undulate up and down hill ; or the workings may be situated long distances from the shaft. In such cases horses are inadequate, and a system of mechanical haulage must be installed. For this

purpose stationary engines are employed, either on the surface or underground. Where on the surface, the ropes are carried down the shaft in a wooden casing; where underground, the engines are supplied with steam generated at the surface and carried down the shaft in pipes. Several different haulage systems have been developed.

The 'main-rope' or 'direct haulage' system, for raising coal from dip-workings, can be employed where the gradient of the engine-plane (*i.e.* the inclined plane up which the tubs are hauled from the workings to the shaft-bottom) has a regular dip of not less than  $1\frac{1}{2}$  inches in a yard. At the station a train of loaded tubs is hitched on to the end of the rope; a signal is given to the engine-room on the surface, the rope is wound in, and the train pulled up to the shaft-bottom. There the rope is unhitched, attached to an empty train, which is then started down the incline. The gradient being sufficiently steep, the train pulls in the rope with it, the drum at the engine meanwhile being thrown out of gear so as to run free on its shaft. One drum, one rope, and one set of rails suffice for this system.

The 'main-and-tail-rope' system (*A*, Fig. 16, p. 127) is applicable to almost any condition of road. Only one set of rails is required, but two parallel ropes are needed. One, the main rope, hauls out the full tubs; the other, of lighter construction,

hauls in the empties. At the engine-house each rope is wound on a separate drum, which can be thrown out of gear as required. At the inbye station the end of the tail rope is passed round a return pulley. In Fig. 16 the full train is being hauled out-by by the main rope, whose drum is in gear; at

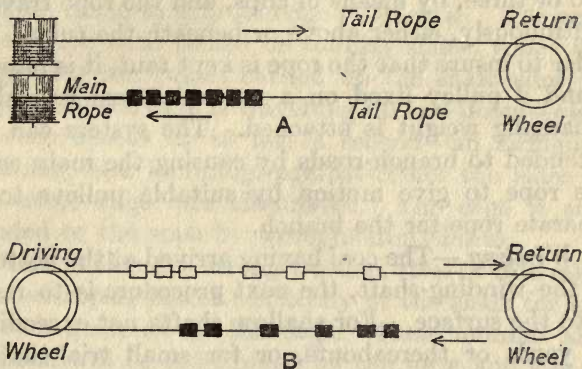


Fig. 16.—Plan showing Main-and-Tail-Rope system of haulage (A) and Endless-Rope system (B).

the same time the tail rope is being drawn off its own drum, which is running free. At the shaft-bottom, the full train is replaced by an empty one, which is hauled inbye by the tail rope, while the main rope is being drawn off its own drum, now out of gear. The system is capable of extension to branch-roads in several different ways.

The 'endless-rope' system (B, Fig. 16) requires

two sets of rails, one for empties travelling inbye, the other for full tubs going outbye. At the shaft-bottom the single rope is carried round a driving-pulley actuated by the engine, while at the inbye station it passes round a return-pulley. The tubs are attached to the rope singly or in short trains of two or three, by means of clips, and the rope travels continuously, either above or beneath the tubs. In order to insure that the rope is kept taut, it is passed round a pulley fixed on a movable tram to which a hanging weight is attached. The system can be extended to branch-roads by causing the main endless rope to give motion by suitable pulleys to a separate rope for the branch.

*Winding.*—The coal having arrived at the bottom of the winding-shaft, the next procedure is to raise it to the surface. For shallow shafts not exceeding 30 yards or thereabouts, or for small trial-shafts, windlasses of various powers may be used, with one or two buckets, and a hempen rope. For greater depths and heavier loads a horse-gin is sometimes still employed, as at small collieries in South Staffordshire. Usually, however, the coal-tubs are placed in a cage running between guides, and raised to the surface by a steel rope wound by powerful steam-engines. The winding-shaft generally accommodates two cages, one ascending with full tubs while the other descends with empties.

The cage is the receptacle that carries the tubs, men and materials up and down the shaft. It is constructed of iron or steel, and has one to four decks, and takes one, two or three tubs on each deck. Each deck is furnished with rails on which the tubs stand, and each tub is kept in position by a catch made to grip its edge or its axle. The cage is supplied with forked or tubular slides, which engage with the guides carried up the shaft-sides, so that while the cage is travelling up and down—even at such speeds as 80 feet a second—all swinging, spinning, and bumping, against either the sides or the other cage, are eliminated. The cage is suspended to the rope by wrought-iron chains.

The guides are strong wooden, steel or iron rails, or steel ropes, placed vertically in the shaft for the smooth guidance of the cage. Their number and position will be determined by the form and size of the cage, and the kind of guide used. Wooden guides are made of rails of pine-wood, 18 to 20 feet long, and 4 by 3 inches in section, placed end to end and bolted to horizontal cross-pieces (buntons) fixed to the shaft-sides. Iron or steel rails make a more substantial and durable guide, and wire ropes also are largely employed, fixed at the top to the pit-head frame, passed at the bottom through balks, and kept taut by heavy weights hung to their lower ends.

The ropes used for winding are usually round in section, and made of steel wire. The mouth of the shaft is fenced with iron or wooden gates, which are automatically lifted up by the cage when it reaches the top landing (and so takes their place), and fall into position again as the cage descends. The cage is kept in position, flush with the landing-place, by 'keeps,' which by an arrangement of levers are shot forward under the cage when it reaches the top.

Signals are communicated between the engine-house and the top and bottom landing-places, and also underground, by a wire, actuated by a lever, causing a rapper to strike a sonorous iron plate; but electric bells and telephones are now becoming general.

At the top of the winding-shaft the winding-ropes are carried over pulleys hung in the pulley-frame or pit-head frame, and thence enter the engine-house. Pulley-frames are built of wood or iron—the latter is more durable and obviates risk of fire. Two or four uprights (pulley-legs) 30 to 80 feet in height are erected vertically over the shaft, and two back-stays are placed at a slope from the top of the pulley-legs so as to resist the pull toward the engine-house. Where, as is usual, two cages are employed in the same shaft, the pulleys are placed side by side in the pulley-frame. The pulleys are grooved to suit the diameter of the rope, and are 10 to 20 feet



in diameter, dependent on the thickness of the ropes. Small pulleys involve a sharper bend in the rope, and so increase its liability to fracture.

It occasionally happens that the rope breaks, or the cage, instead of being stopped at the landing-place at the shaft-top, is 'over-wound,' *i.e.* pulled up to the pulleys, when the rope breaks and the cage—with its mineral or human freight—falls down the shaft. Various devices have been introduced to prevent these calamities. Safety-cages are provided with an arrangement that strongly grips the guides as soon as the rope breaks, and so keeps the cage suspended. In the event of overwinding, the rope is liberated from the cage, and the latter is prevented from falling, by the insertion of a detaching-hook between the end of the rope and the cage-chains. Just below the pulley the rope passes through a bell-shaped socket let into a wooden cross-beam or catch-plate. When the cage is inadvertently pulled up to the catch-plate, the jaws of the detaching-hook are automatically opened, the rope goes free, and at the same instant two catches spring out above the catch-plate and keep the cage suspended.

Another method of preventing overwinding is to apply a powerful steam brake to the winding-drum through the action of levers placed in the path of the cage at a point above which it ought not to pass when under control.

The most approved form of winding-engine is the horizontal direct-action coupled engine, which has two horizontal cylinders, with connecting-rods attached to cranks on the axle of the winding-drum. The cranks are set at right angles to each other, so that there is no dead-centre ; the drum is provided with band-brakes, actuated by the foot of the engine-driver, or by steam. The drum is cylindrical, with high flanges to prevent the rope slipping off ; and the rope is so wound upon it that when one cage is descending, the other is ascending. In order that the engineman may bring the cages to a standstill at the landing-places, it is essential that he should see at a glance the position of the cages in the shaft. This he can do by the winding-indicator, which consists of either a pointer travelling in a vertical frame and actuated from the drum-shaft, or a dial on which a pointer indicates the cage's position. Usually a bell is caused to ring in the engine-house as the cage approaches the top landing, and it is important that the engineman while at his post should have a clear and uninterrupted view of the shaft-mouth.

With a deep shaft involving a great weight of rope it is obvious that there will be a much heavier strain on the engine at the commencement than at the end of the lift. In order to assist the engine at the beginning of its wind, various methods of counterbalancing have been devised.

*Surface-Arrangements.*—The top landing-stage, where the tubs are withdrawn from the cage and replaced by empty ones, is not laid out on the ground-surface, but is raised 20 or 30 feet above it on an earthen bank, or, still better, on iron pillars. The height thus gained allows the tubs to be emptied over screens into the railway-trucks brought up alongside or underneath to receive the coal. The landing-stage is generally paved with iron plates, on which the tubs can be turned and moved about with much facility, gravity being utilized wherever possible to help in running the full tubs toward the screens.

The full tubs, after being weighed, are emptied on to the screens, not by laboriously shovelling out the coal, but by running the tub into a tippler, which consists of an iron framework rotating on a horizontal axle, and placed over the screen. By a suitable movement the tippler is rotated till the tub is turned over sufficiently for the coal to shoot out. The screens or riddles are required for the purpose of sorting-out the coal into various-sized pieces. Coal in large pieces—called ‘round’ coal, for no obvious reason—commands a high price, while the fine dust or ‘duff’ can scarcely be got rid of at any price except for the manufacture of patent fuels. Intermediate sizes are known by such names as cobbles, nuts, beans, peas, etc. The ordinary screen

is a rectangular iron spout, in the flat bottom of which are fitted gratings made of iron bars placed lengthwise. The screen is set with an inclination of  $20^{\circ}$  or so, and the bars are fixed at a suitable distance apart to allow all but large coal to fall through into a hopper as the contents of the tub slide down the screen. The large coal that does not so pass through lands on a table, where any lumps of bad coal, bat, stone or pyrite are picked out by hand and thrown on one side. The coal is then shovelled into the truck standing before the table. During all these operations the coal is bound to suffer further breakage, and a soft coal suffers seriously.

It is necessary to subject some varieties of coal to a much more elaborate screening and cleaning, in which case shaking-screens and travelling belts are employed. Shaking-screens are suspended at a small angle and caused to jerk backward and forward about 70 times a minute by a special engine. The coal travels slowly down-hill toward the truck, while lads stand alongside and pick out the rubbish. At the bottom of the screen the coal is delivered on to a horizontal travelling belt, 20 to 60 feet long and 3 or 4 feet wide, made of iron plates or cloth, and caused to travel slowly forward. The coal, evenly and thinly scattered over the belt, then passes under the scrutiny of the hand-pickers, who throw out any refuse still undetected.

Small coal destined for the coke-manufacturer has generally to be washed to free it from impurities. The principle on which coal-washing machines are constructed is that the specific gravity of coal is smaller than that of its stony impurities. When impure coal is agitated in a stream of water, the heavy impurities move toward one part of the machine, while the coal, being lighter, moves toward another. Some of the larger washers will deal with hundreds of tons a day.

In working the coal, much rubbish (bad coal, pyrite, shale, and stone) is produced, and must be disposed of. Some is stowed underground in the goaf; but much of it is brought to the surface and piled up in huge unsightly mounds, where it frequently takes fire spontaneously, filling the air with noisome vapours. When burnt out, however, some of these rubbish-tips are turned to account for ballast, the burnt shale, which often assumes a brick-red colour, being specially suitable for garden footpaths. In South Staffordshire many old tips have been successfully planted with timber, and converted into picturesque and attractive recreation-grounds, as at Wednesbury and Walsall.

## CHAPTER X

LEASES AND ROYALTIES, ADMINISTRATION,  
AND STATE REGULATIONS

*Leases.*—Though in early times all minerals in the British Isles appear to have been claimed by the Crown, this claim has unfortunately long been relinquished except in the case of gold and silver; and in the absence of other provisions the minerals belong now to the owner of the surface. A property may, however, be sold subject to the minerals being reserved, or subject to the right of the vendor to work the minerals on paying compensation for surface-damage. A mining-company may purchase the minerals from the owner, who will then retain possession of the surface. The owner of a property may work the minerals himself, but usually he retains his surface-rights and grants a lease of the minerals to a mining-company. Under ordinary custom of mining, the lessees are liable for all surface-damage. The terms on which the mineral-owner will grant a lease vary greatly according to local custom. Leases are granted generally for 21, 42, or 63 years, with power of surrender.

As a general rule, colliery-proprietors show great reluctance to expend capital in purchasing mineral

properties out and out, even when they can do so upon highly-favourable terms; and the vast majority of collieries are leased by the colliery-owner from the owner of the soil. The terms of these leases vary in different districts; but the general features have become standardized as the result of generations of negotiation and experience.

For the surface-land necessary for the erection of the pit-head machinery, railway-sidings, and for tipping-ground for rubbish, a fixed rent per acre is charged—in South Wales the usual rate is £2 per acre.

*Dead-rent and Royalties.*—Then there is a definite annual sum payable for the whole taking, known as the ‘fixed,’ ‘sleeping,’ ‘minimum’ or ‘dead’ rent. This is roughly calculated upon the total area of the mineral taking, and its primary object is to insure that the lessee will actually work the minerals and not merely hold them up.

In the case of a colliery that is working fully, the amount of the dead-rent is not very material, as it merges into the ‘galeage’ or ‘royalty,’ which is the essential feature of a mining-lease of coal. This royalty is a payment to the landlord proportionate to the amount of coal worked from the mine during a certain period (usually a year), and the method of calculating it varies considerably in different districts. One method that is very common in the case of metalliferous mines, and is sometimes

adopted for coal also, is to give the landlord a proportion (say  $\frac{1}{4}$ ) of the actual selling-price of the coal at the pit-head. Another method (the Yorkshire custom) is called the 'acreage royalty.' In this system the actual area of the coal worked is calculated at the end of the selected period, and payment is made at the rate of so much per acre upon the coal worked. The rate is either a simple one per acre, or it may vary, according to a sliding-scale, with the actual selling-price of the coal. A modification of this method (the Nottingham custom) is the 'footage royalty.' In this case, instead of calculating the area simply, without regard to the thickness of the seam, the unit taken is an acre of coal one foot thick (the 'foot-acre'), so that if an acre has been worked of a seam two feet thick, two footage royalties would be payable; but if the seam were ten feet thick, ten such royalties would be payable, and so in proportion. Otherwise it is calculated in the same way as the acreage royalty, either simply, or upon a sliding-scale.

The third method, customary in South Wales and Durham, is the 'tonnage royalty.' In this case the royalty is paid at so much per ton (say 3*d.* to 10*d.*) upon the actual quantity of coal worked—the rate varying according to the quality and thickness of the seam, and sometimes also varying in proportion to the selling-price of the coal.



Whatever method may be adopted, however, the royalty always merges in the dead-rent ; so that the royalty is only payable if the amount of it exceeds the amount of the dead-rent. Further than this : almost all mining leases contain some form of average-clause. Under this, if in one year the mine-owner has failed to work such a quantity of coal as would make up the dead-rent in royalties, but in the succeeding years over an agreed period the royalties exceed the dead-rent, the excess is set off against the deficiency.

Suppose, for example, that the dead-rent under a particular lease is £600 a year, and the average period three years ; also that in the first year the royalties amount to £300, in the second year £400, and in the third year £500 ; the total royalties are £1200, and the average yearly royalties £400. Therefore as the average royalties do not exceed the dead-rent, £600 a year is payable to the owner, who has thus made at the end of the three years £600 more than the earnings of the colliery have yielded !

But suppose the dead-rent is £600, the average period three years, and the royalties are respectively £500, £700, and £900. The total royalties are £2100, and the average £700. Therefore as the average royalties exceed the dead-rent, the royalties are payable, *i.e.* £2100. If there had been no average clause, the dead-rent of £600 would have been payable in

the first year, and the royalties in the next two years, or £2200 in all as against £2100.

Mining leases usually contain also a provision enabling the lessee (but not the landlord) to terminate the lease if the coal has all been worked out or has become unworkable at a profit ; and there are very many other provisions that we have no space to mention. It is of interest to know that a Royal Commission reported in 1893 that any reduction in royalties would benefit nobody but the consumer !

*Way-leave.*—In the lease provision may need to be made for surface way-leave, underground way-leave, and other privileges. Way-leave is the privilege of a lessee to carry his minerals over or through the property of another owner, and is usually paid for by a tonnage on the minerals so carried. Surface way-leave may be a source of considerable profit to the owner of the property crossed, as it sometimes takes the form of a heavy annual charge, fixed in some cases as high as £250 per mile, plus a rent estimated at double the agricultural value of the land required ! Mining in a district much cut-up among small owners, as in parts of South Staffordshire, is subject to endless burdens and inconveniences from the way-leaves, which in the past have entailed a maximum of expenditure and waste in the sinking of superfluous shafts and the leaving of barriers of valuable coal between the several properties.

*Administration.*—The running of the colliery is placed in the hands of the colliery manager, who nowadays has to be a man of wide and varied knowledge, experience, and organizing power. To get the largest proportion of available coal in the best selling condition, at the lowest cost, and with the greatest amount of safety and comfort to the employed, he must be a well-trained mining-engineer, a good man of business, and a tactful leader of men. For all that goes on in the mine he is responsible, not only to the lessees of the minerals, but also to the State. The most important officials working under him include the under-manager, the overman, deputy-overmen, master-shifter, master-wasteman, engineer, heap-keeper, hewers, fillers, putters, stonemen, shifters, wastemen, banksman, onsetters, rolleywaymen, horse-keepers, furnacemen, trappers, etc. Associated with them is the lessor's agent, who acts for the lessor, looks after his interests, and sees that the conditions of the lease are fulfilled; also the check-weigher, who is appointed by the men paid according to the weight of mineral obtained, to see that they receive justice.

The under-manager is responsible for the proper running of the mine during the temporary absence of the manager. The overman has responsible charge underground, and makes out the wage-bills; each district in the mine is in charge of a

deputy-overman. The master-shifter is in charge during his shift in the absence of the overman ; the master-wasteman looks after the ventilation, safety-lamps, etc. ; the engineer is responsible for the engines, boilers and machinery. The heap-keeper superintends the pit-bank, screens, loading of railway-trucks, etc. ; the banksman has control of the shaft-top, and the onsetters of the shaft-bottom. Hewers are the men who do the actual getting of the coal at the face ; fillers place the coal into the tubs ; putters convey the loaded tubs from the face to the putters' flat or siding. Stonemen do the 'dead' work of driving or enlarging the stone-headings, and perform excavation-work other than in the coal. Shifters do the necessary clearing away of falls of roof, and set timber in the roadways ; wastemen do the same work in the return air-ways ; rolleyway-men see that the underground railways are in order. The trappers are boys who look after the trap-doors in the air-ways and see that they are kept closed after use, as any neglect might disarrange the ventilation and cause an explosion.

*Wages and Output.*—These various officials are paid in different ways, some by the day (datallers), others, such as the hewers, putters and stonemen, are paid by piece-work. Hewers generally are paid by the ton of coal sent up—deductions being made for a tub not properly filled, or which contains too

much rubbish. The hewing-price per ton varies very greatly, and is modified by all sorts of special circumstances. Putters are paid according to the number of full tubs they convey from the face to the flat, and the distance involved. Stonemen are paid by the cubic contents and character of the material excavated, or else by contract.

The men work in shifts, two or three in the 24 hours, of 8 hours each, bank to bank; and wages are paid once a fortnight.

Taking into consideration eleven different representative collieries in various parts of England and Wales during the year 1904, Messrs Bulman and Redmayne find that the cost of labour averaged 3s. 11½*d.* a ton for underground men, and 7½*d.* for the surface-men, or altogether 4s. 7*d.* per ton, which is only 50 or 60 per cent. of the total cost of getting, the other percentage going to materials, royalty, rates and taxes, and management. The average production per hewer per shift was about three tons; per underground hand 1.39 tons, and including surface hands, 1.19 tons. The hewers received an average wage of 6s. to 7s. a shift, the other workers earning lower wages, except stonemen, etc., who are paid by the piece at higher wages.

The following recent figures for a Yorkshire mine will give some idea of the scale on which a modern colliery is conducted :

Output per fortnight of 10 days, 18,966 tons, from 6 seams (house-coal and coking-coal) worked by longwall.

Stock of tubs, 3500. Men employed at surface, 500; underground, 1394. Shift, 8 hours.

Details of underground labour:

	Number	Percentage	Net earnings	
			per shift	
			s.	d.
Hewers .. .. .	605	43	6	11½
Stonemen and shifters ..	103	7	8	1
Putters .. .. .	316	23	5	9¼
Drivers and boys .. ..	243	18	3	3½
Deputies .. .. .	18	1	7	3
Various .. .. .	109	8	5	10¼
	1394	100		

In 1800 the estimated coal-output of the United Kingdom was 10 million tons; in 1903 it was 230 million tons; in 1912, 260 millions; and the findings of the Royal Commission of 1901 show that British coal is not likely to last more than another 250 years, and will become exhausted between A.D. 2130 and 2200.

*Accidents.*—Although the number of fatal accidents in our coal-mines is still sadly large, it is steadily becoming smaller in proportion to the number of men employed. Occasionally some catastrophe of unusual magnitude, generally an explosion—such as that in 1866 at the Oaks Colliery in Yorkshire, where 334 men were killed outright; or that at Senghenydd in Glamorgan in 1913, which

killed 439; or an irruption of the sea or a river into the workings, such as took place at Landshipping in Pembrokeshire in 1844 and killed 40—stirs the public interest, and calls attention to the perils that must ever attend this dangerous calling. Yet as a fact the death-rate among colliers is kept up by less sensational accidents, such as falls of roofs and sides, or those connected with underground haulage, or in shafts, and from other minor causes, all of which are in operation daily, and claim their victims singly or in small numbers.

In 1912, falls of rock from roof and sides accounted for 44·5 per cent. of the deaths, miscellaneous accidents for 26·5, accidents on the surface for 13·8, in shafts 5·6, and explosions of fire-damp and coal-dust 9·6. In the same year there were employed at the 3093 mines 1,072,393 persons (of whom 6457 were women and girls) above and below ground, and the number of fatalities amounted to 1258.

Explosions of fire-damp, or of coal-dust, or of a mixture of the two, may take place, in spite of a good ventilating-current, through a fall in the atmospheric pressure leading to a rise in the percentage of fire-damp (p. 111); through a sudden blower or outburst of gas locally rendering the air explosive, when the defective condition of a safety-lamp, or some damage to it, or some careless or reckless conduct on the part of a workman, or the

flame of the explosive used to bring down the coal, may lead to a disaster.

Falls of roof and sides may be guarded against by abundant and properly-set timbering. Haulage-accidents arise from tubs breaking loose and running amok down an incline, or through men being knocked down by moving tubs; while in shafts the victim may fall from a side-opening or from the surface, or may be killed through overwinding, or by the breaking of a rope. Blasting-operations too claim their toll of lives, while on the surface accidents happen on the railways and tramlines. The introduction of electricity brings with it new risks of shock to the men and of ignition of fire-damp and combustible materials.

*State Regulations.*—The first Act of Parliament dealing specially with mine-regulation was passed in 1842, to exclude women and girls from underground employment, to improve the status of the boys, and to provide for the appointment of inspectors. In 1860 an act introduced general rules for working, prescribed certain mechanical appliances, prohibited some dangerous practices, and authorized special rules defining the duties of the officials and workmen—all with a view to the safety of the staff. In 1865 two shafts or outlets to the mine were made obligatory. In 1887 the earlier acts were repealed, and their provisions re-defined and amplified in the



principal act dealing with coal-mines, which applies to all mines in Great Britain and Ireland working coal, stratified ironstone, shale and fireclay. Several later acts relate to check-weighers, explosives, employment of boys below-ground, qualifications of managers and under-managers, timbering, and electric installations. The most important of the later acts is that of 1908, known as the Eight Hours Act, while the various Truck Acts, and the Workmen's Compensation Act of 1906, apply to the management of collieries.

*Plans and Records.*—A most important provision of the Act of 1887 is that at every colliery-office a plan must be kept, showing the extent of the workings up to date, with the direction and amount of the dip, together with a record of the shaft-section whenever obtainable, or at least a statement of the depth, with a section of the seam worked. By the Act of 1896, on the abandoning of a mine a copy of the plan must be deposited at the Home Office, where after a lapse of ten years it becomes available for public inspection. Although of course plans—and sometimes excellent ones—were kept long before 1887, it was not made compulsory till that year; the result being that there are many disused collieries of which no plans are known to be extant. Thus not only has much valuable scientific information been lost to posterity, but many serious practical

difficulties have been put in the way of later projectors. In the absence of accurate plans of abandoned collieries, there is a constant danger of the present-day workings suddenly tapping water or gas from old works. Old plans, even where accessible, are often inaccurate, and in many particulars are unintelligible; and in some cases the pits to which they relate cannot be located for want of the necessary topographical particulars. Faults are marked 'riser' or 'dipper' (upthrow or downthrow) without any indication of the direction and amount of the downthrow. The magnetic north point (a variable quantity) is given, without the date necessary to fix the true north point. On a plan showing several different shafts, a shaft-section may be given, but no means of ascertaining to which of the shafts it refers. From these and such-like defects, many of the older plans yield disappointingly meagre information.

Another source of valuable geological information, viz. the results of the numerous boreholes put down year after year all over the country, is being still pitifully neglected by the State. A boring in search of coal may be carried out at great cost; if successful, and a shaft is sunk and coal worked, the case would come under the provision of the Act of 1887, and the section to some extent would be recorded on the plan. But if no shaft is sunk, or no coal

worked, the information obtained from the boring may never be put on permanent record, unless it should happen to attract the attention of some geological enthusiast, who may—or may not—publish the results in the ‘proceedings’ of some scientific society. There seems no valid reason why the State provision as to shaft-sections should not be extended to the case of boreholes, and a record of the strata deposited at the Home Office.

## BIBLIOGRAPHY

The foregoing pages provide merely an introduction to the subject of Coal Mining ; for further information the reader should consult the following works :

### *General Geology :*

Any of the modern text-books.

### *Natural History of Coal :*

E. A. NEWELL ARBER, 'The Natural History of Coal,' 1911  
(Cambridge Manuals of Science and Literature).

### *Fossil Plants of the Coal Measures :*

E. A. NEWELL ARBER, 'Fossil Plants,' with 60 photographs,  
1909 (Gowans & Gray).

D. H. SCOTT, 'The Evolution of Plants' (Williams &  
Norgate, 'The Home University Library').

A. C. SEWARD, 'Fossil Plants,' Vol. I, 1898, Vol. II, 1910  
(Cambridge Univ. Press)

### *Geology of the Coal Measures :*

WALCOT GIBSON, 'The Geology of Coal and Coal-Mining,'  
1908 (Arnold).

### *History of Coal Mining :*

R. L. GALLOWAY, 'Annals of Coal Mining and the Coal  
Trade,' series 1, 1898 ; series 2, 1904 (Colliery Guardian  
Co.).

R. L. GALLOWAY, 'A History of Coal Mining in Great Britain,'  
1882 (Macmillan).

*Coal Mining :*

- W. S. BOULTON (Editor), 'Practical Coal-Mining,' Six Vols, 1907-1909 (Gresham Publishing Co.).
- H. F. BULMAN and R. A. S. REDMAYNE, 'Colliery Working and Management,' 1906 (Crosby Lockwood & Son).
- C. PAMELY, 'The Colliery Manager's Handbook,' ed. 5, 1904 (*Ibid.*).
- R. PEEL, 'An Elementary Text-book of Coal Mining,' ed. 16, 1911 (Blackie & Son).

*Statistics :*

- 'Mines and Quarries: General Report, with Statistics, for 1912' (Home Office).

Many of the early forms of atmospheric and steam-engines (both stationary and locomotive), and other mechanical appliances closely connected with the subject of Coal Mining, are exhibited in the Victoria and Albert Museum, South Kensington, and are described in the official guides.

## INDEX

- 'Abnormal places,' 59
- Accidents, 33, 144-146
- Adits, 7-9, 13, 14, 21, 119
- Administration, 141, 142
- After-damp, 110
- Air, compressed, 36, 83, 121
  - distribution of, 115-118
- Anthracite, 37-39, 51
- Anticlines, 62, 63
- Arber, Dr E. A. N., 49, 51
- Arsenic in coal, 41
- Ashburnham, 32
- Ashton Moss Colliery, 86
- Atmospheric or fire-engine, 17-20, 22-24
- Average-clause, 139
  
- Backs, 69
- Bacteria in coal, 51
- Balance-tub, 21
- Balls (fuel), 36
- Barnsley Seam, 56
- Barren ground, 66, 67
- Basins or coalfields, 61-63
- Bat, 56, 134
- Bearers, 8
- Beaudesert Park, 38
- Beaumaris Castle, 6
- Beaumont, Master, 12
- Beehive pits, 7
- Bell-pits, 7
- Bewdley, 4
- Binds, 53, 56
- Black damp, 111
- Blasting, 17, 33, 83, 84, 93
  
- Blenkinsop, John, 28
- Blowers, 30, 32, 110, 145
- Bloxwich, 61
- Blue bricks, 54
- Blyth, 5
- Bolt-holes, 106
- Bord-and-Pillar, 15, 95-103, 106 ;
  - ventilation of, 117, 118
- Bord-and-Wall, 95
- Bords, 96-99, 115
- Boring, 12, 43-46, 64, 73-77, 148, 149
- Boulton, Matthew, 27
- Bovey Tracey, 41, 42
- Brasses, 40
- Brattices, 33, 101, 115, 116, 118
- Breaks in seam, 58-61
- Brejcha's method of boring, 76
- Brereton, 119
- Brewers, 5, 8
- Bricks, 54, 57
- Bridgnorth, 45
- Broken working, 96, 98, 102, 103
- Bronze-smelting, 3
- Brora, 41
- Brown Coal, 37, 38
- Buddle, John, junr., 30
- Bulman, H. F., and Redmayne, R. A. S., Messrs, 143
  
- Cage, 32, 128, 129
- Caius, Dr John, 5, 10
- Caking coals, 39
- Camhous, Adam de, 5
- Cannel Coal, 37, 38, 51

- Carbon dioxide, 111; monoxide, 111, 112
- Carboniferous Limestone, 43, 63  
— System, table of, 47
- Carmarthenshire, 44, 78
- Carnarvon Castle, 6
- Cawley, John, 18
- Chabauner, —, 36
- Chain-pumps, 13, 19
- Chains, winding-, 35
- Charcoal, 3, 4, 11, 12, 16, 20, 32
- Cheadle, 16
- Cheshire, 76
- Choke-damp, 111
- Clanny, Dr W. R., 31
- Claverley, 45
- Cleat, 69, 88, 97, 98
- Cleavage, 69
- Clee Hills, 61
- Clod, 53
- Clunch, 53, 56
- Coal, arsenic in, 41; iron-pyrite in, 40, 41; sulphur in, 40, 41  
— conditions of deposition, 50  
— duration of supply, 144; formation of, 51  
— origin of, 50, 51; origin of name, 4  
— output of, 11, 27, 142-144  
— varieties of, 37-39, 51
- Coals, combustion of, 39, 40  
— geological age of, 41-44  
— suitability of, 40, 41
- Coalbrookdale, 19, 20, 22, 23, 45, 53, 59
- Coal-cutting machines, 108, 109
- Coal-dust, 112, 113
- Coalfields or basins, origin of, 61-63  
— Kent, 64; Northern, 84; Yorkshire, Derbyshire and Nottinghamshire, 64, 84, 96, 138
- Coal Measures, characters of, 41-43, 52-58; organic remains of, 41, 47-49, 54, 57
- Coal-seam, Barnsley, 56; Coleford High Delf, 59; Shallow, 119; Smithy, 55, 56; Thick or Ten-yard, 25, 57, 58, 105, 106
- Coal-seat, 57
- Coal-washing, 135
- Coke, 11, 20, 40, 57, 135
- Coking Coal, 37, 57
- Coleford High Delf Seam, 59
- Coleorton, 11
- Collier, origin of name, 4
- Collieries, Ashton Moss, 86; Florence, 85; Griff, 19, 22; Landshipping, 145; Nether-ton, 26, 29; Oaks, 144; Senghenydd, 144
- Combustion of coals, 39, 40
- Compleat Collier, The*, 14
- Compressed air, 36, 83, 121
- Conditions of deposition of coal, 50
- Cores, care of, 76, 77
- Corf, 10, 14, 22, 24, 32
- Cornish pumping-engine, 121
- Costeaning, 73
- Coursing the air, 21, 117
- Cradley, 58
- Crank, 23
- Creep, 29, 30, 102
- Crop, *see* Outcrop
- Crush, 30, 101
- Culm, 36
- Cumberland, 27, 42
- Curr, John, 24
- Cutters, 69
- Dams, 94
- Darby, Abraham, 20
- Dartmouth, 18

- Davy, Sir Humphry, 31, 122, 123  
 Davy-lamp, 31, 33, 111, 122, 123  
 Day-holes or Day-levels, 7, 9,  
 78, 79, 119  
 Dead-rent, 137-140  
 Deep shafts, 85, 86  
 Dene, Forest of, 32, 52, 59, 78,  
 120  
 Derbyshire, 64, 96  
 Dhustone, 61  
 Dip, 67, 68, 72 ; ' to the dip,' 80  
 Dip-workings, 120, 125  
 Domesday Book, 3, 4  
 Dorset, 41  
 Double-road Stall, 95  
 Drainage, 12, 13, 17, 20, 118-121;  
 free or natural, 8, 13, 32, 119,  
 120  
 Drifts, 72, 78, 79, 93 ; stone-, 91,  
 92, 116  
 Dry coals, 40  
 Dudley, 29  
 Dudley, Dud, 16, 20 ; Lord —, 25  
 Duff, 133  
 Dunstanborough Castle, 6  
 Durham County, 5, 6, 10, 33, 40,  
 96, 138  
 Dust, coal-, 112, 113  
 Dyers, 5  
 Dykes, 60  
  
 Edge-coals, 63  
 Edge-rails, 25, 35  
 Electric fans, 117 ; light, 123 ;  
 power, 36, 83, 117, 121 ; shot-  
 firing, 84 ; signals, 130  
 Elis, 2  
 Endless-rope haulage, 127, 128  
 Ends, 69, 97, 98  
 Engine, atmospheric or fire-, 17-  
 20, 22-24 ; Cornish pumping-,  
 121 ; steam, early, 23, 27, 28 ;  
 winding, modern, 35, 132  
 Engine-plane, 87, 89, 126  
 Etruria Marls, 47, 54  
 Explosions, 12, 16, 17, 21, 29, 32,  
 34, 112, 113  
 Explosives, 33, 100, 101  
  
 Face, 69, 97, 104  
 Face-airing, 15, 21, 117  
 Fans, ventilating, 33, 34, 114, 115  
 Fault-rock, 90  
 Faults, normal, 66, 67 ; over-  
 thrust, 65, 66 ; driving through,  
 90-93 ; leader of, 90 ; step-,  
 66 ; ' throw ' of, 66, 67 ;  
 ' want ' of, 66, 67  
 Fault-trough, 66  
 Ferruginous springs, 72  
 Finchale, 7, 8  
 Fireclay, 57  
 Fire-damp, 10, 16, 25, 30, 110,  
 112, 122, 123, 145 ; detectors,  
 123  
 Fire-engine, 17-20, 22-24  
 Fire-lamp, 16, 29, 33  
 Firemen, 25, 26  
 Fire-rib, 106, 107  
 Fires, underground, 10, 11, 15,  
 16 ; gob-fires, 105, 106, 111  
 Fire-setting, 16, 17  
 Firing the gas, 25, 26  
 Flat (putters'), 124  
 Flat ropes, 25, 34, 35  
 Floor, 57  
 Florence Colliery, 85  
 Fly-wheel, 23  
 Folds, 59, 60, 62-65  
 Foot-acre, 138  
 Forest of Dene, 32, 52, 59, 78, 120  
 Forest of Wyre, 4  
 Formation of coal, mode of, 51  
 Forth, Firth of, 4  
 Fossils of Coal Measures, 41, 47-  
 49, 54, 57



- Fossils, use of, 46, 49, 50  
Fourness, William, 34  
Freezing, sinking shafts by, 82, 83  
Fuels, patent, 35, 36, 133  
Furnaces, iron-, 19, 23, 24, 32, 57; ventilating, 29, 33, 34, 114  
Galeage, 137  
Gannister, 57  
Gas, *see* Fire-damp  
Gas Coal, 37, 38, 41, 56  
Gas-lighting, 27  
Gateroads, 103, 104  
Gateshead, 12, 17  
Gebhardt's method of sinking, 83  
Genoa, 2  
Geological Survey, State, 15, 46, 70  
Geological surveying, 69-71  
Geological Systems, table of, 42  
Geology of coal, 41-73  
Gibson, Dr Walcot, 46, 49  
Gig-brow, 125  
Glamorgan, 54, 144  
Glass-making, 12  
Goaf or gob, 89, 96, 99, 102-105, 135  
Gob-fires, 105, 106, 111  
Graphite, 38  
Graptolites, 44  
Greece, 2  
Green rock, 61  
Griff Colliery, 19, 22  
Guides, 24, 32, 128, 129  
Gunpowder, 17, 33  
Hade, 66  
Hadrian's Wall, 3  
Halesowen, 58  
Hall, T. Y., 32  
Hamstead, 105  
Hand-picking, 134  
Harraton, 33  
Haulage, underground, 124-128  
Heading, 72; cross-, 88  
Headway, 96-99, 115  
Hendre-forgan, 34  
Heswall, 76  
Hewing, 98, 100  
Hill system of working, 95  
Historical review, 1-37  
Hodgson, Rev. John, 31  
Holing, 98, 100  
Holy Island, 8  
Holyrood Abbey, 4  
Hop-drying, 39, 41  
Horse-gins, 13-15, 20, 22, 128  
Horse-power, 13-15, 21, 27, 124, 125  
House Coal, 37-39, 51, 56  
Hydrogen sulphide, 112  
Igneous intrusions, 60, 61  
Inbye, term explained, 87  
Inclined planes, 21, 24, 28, 87, 89  
Intakes (air), 115-117  
Introduction, 1, 2  
Ireland, 39, 42  
Iron, output of, 24, 32; furnaces, 19, 23, 24, 32, 57; ropes, 34, 130, 131; smelting, 3, 9-11, 16, 20, 23, 24, 27  
Ironstone, 53, 54, 72  
Jarrow, 31  
Joints, 68, 69  
Jurassic rocks, 41, 63, 64  
Keeps, 130  
Kent Coalfield, 64  
Kidston, Dr Robert, 49  
Kimeridge, 41  
Kind-Chaudron method of sinking, 85  
Kirving, 98

- Koenig's method of sinking, 83  
 Labour, 9, 141-145  
 Laccolite, 61  
 Lamps, safety, 31, 33, 111, 122,  
   123; fire-, 16, 29, 33  
 Lancashire, 57  
 Land-sale, 78  
 Landshipping Colliery, 145  
 Laws regulating Coal Mining, 6,  
   146-148  
 Leases, 136, 137  
 Leeds, 28, 34  
 Leicestershire, 11  
 Leland, John, 5  
 Level-course, 67, 93, 99  
 Levels, day-, 7, 9, 78, 79, 119;  
   winning-, 87-90, 99, 115  
 Lichfield Cathedral, 38  
 Lighting the mine, 121-123  
 Lignite, 2, 37, 38, 41  
 Liguria, 2  
 Lime-burning, 3-6, 8, 10, 57  
 Limit of working, 65  
 Lithology of Coal Measures, 52-  
   61  
 Locomotive engine, 2, 28  
 Longton, 85  
 Longwall, 27, 89, 95-97, 103-106,  
   118; ventilation of, 118  
 Ludgate Circus, 5  
  
 Machines, coal-cutting, 108, 109  
 Main-and-tail-rope haulage, 126,  
   127  
 Main roads (underground), 87, 88  
 Main-rope haulage, 126  
 Malting, 39, 41  
 Mansell, Robert, 12  
 Marsh gas, 110  
 Martin, John, 33  
 Meinzius, Michael, 21  
 Merthyr Tydfil, 28  
  
 Methane, 110  
 Millstone Grit, 43, 63  
 Monkwearmouth, 31, 32, 35, 84  
 Mostyn, 16  
 Murdoch, William, 27, 28  
  
 Necks, 60  
 Netherton Colliery, 26, 29  
 Newbattle Abbey, 4  
 Newcomen, Thomas, 18  
 Newminster Abbey, 4, 5  
 Nicking, 97, 98, 100  
 Nip-out, 59  
 Norman period, 4  
 Northumberland, 4, 5, 10, 42, 96  
 Norway, 90  
 Nottinghamshire, 64, 138  
 Nuneaton, 19, 22  
  
 Oaks Colliery, 144  
 Officials, colliery-, 25, 26, 141,  
   142  
 Old workings, 93, 94, 148  
 Oligocene rocks, 41  
 Open-work, 6  
 Ordovician rocks, 43, 44  
 Organic remains, 47-49  
 Outbursts, 110  
 Outbye, term explained, 87  
 Outcrop, 6, 63-66, 68, 71, 72, 79  
 Output of coal, 11, 27, 142-144;  
   of iron, 24, 32  
 Overlap, 58, 62  
 Over-winding, 35, 131, 146  
 Owen, George, 69  
  
 Packwalls, 103, 105  
 Panel-work, 30  
 Papin, Denis, 18  
 Parliament, Acts of, 146-8  
 Patent fuels, 35, 36, 133  
 Peat, 38  
 Pembrokeshire, 66, 145

- Pennant Sandstone, 52, 120  
 Pensnett Chase, 16  
 Pen-y-daren, 28  
 Permian rocks, 43, 45, 63, 64, 84  
 Pickard, James, 23  
 Pillar-and-Stall, 95  
 Pillars, 15, 96, 97, 99, 115; re-  
 moval of, 96, 99, 102, 103;  
 size of, 101, 102  
 'Pit-and-adit' stage of mining,  
 7, 9  
 Pitmen, serfs, 9  
 Pit-mounds, 135  
 'Pit' stage of mining, 9  
 Plans of mines, 33, 147  
 Plate-rails, 25  
 Plessey, William of, 5  
 Plot, Dr Robert, 16  
 Poetsch's method of sinking, 82  
 Polesworth, 55  
 Pontoise, 6  
 Post-and-Stall, 95  
 Power, compressed air, 36, 83,  
 121; electric, 36, 83, 117, 121;  
 horse, 13-15, 21, 27, 124, 125  
 Prospecting, 69-73  
 Pulley-frame, 130  
 Pumping, 18, 20, 22, 27, 120, 121  
 Pumps, chain-, 13, 19  
 Putters, 14, 124  
 Pyrite, iron-, 40, 41, 57, 72, 105,  
 112, 134, 135  
  
 Quicksands, 82, 84, 85  
  
 Radnorshire, 43  
 Radstock, 66  
 Rails, early forms of, 12, 19, 25,  
 35  
 Railways, 12, 19, 21, 22, 24, 25,  
 27, 35, 124  
 Rearers, 63  
 Records, mining, 147, 148  
  
 Redmayne, R. A. S., and Bul-  
 man, H. F., Messrs, 143  
 Regulations, State, 33, 146-148  
 Rent, 'dead,' 'fixed,' 'minimum'  
 or 'sleeping,' 137-140  
 Returns (air), 115-117  
 Rhodes, John, junr., 15  
 'Rise, to the,' 80  
 Roads, main (underground), 87,  
 88  
 Roadstone, 61  
 Rocket, The, locomotive, 28  
 Rolley-way, 124  
 Roman period, 3  
 Roof, 57  
 Ropes, flat, 25, 34, 35; hempen,  
 34, 35; wire, 34, 130, 131  
 Round coal, 133  
 Row Pit, Harraton, 33  
 Rowley Hills, 61  
 Royalties, 137-140  
 Ryan, James, 29  
 Ryton-on-Tyne, 32  
 Rugeley, 38  
  
 Safety-lamps, 31, 33, 111, 122, 123  
 Salt-making, 8-11  
 Sands, quick-, 82, 84, 85  
 Savery, Thomas, 18  
 Saxon period, 3  
 Scotland, 42  
 Screens, 133, 134  
 Sea-coal, origin of term, 4, 5  
 Sea-coal Lane (London), 5  
 Seam, breaks in the, 58-61  
 Seam, Barnsley, 56; Coleford  
 High Delf, 59; Shallow, 119;  
 Smithy, 55, 56; Thick or Ten-  
 yard, 25, 57, 58, 105-107  
 Senghenydd Colliery, 144  
 Serfs, 9  
 Shaft-pillar, 86, 104  
 — section, 55

- Shaft-sidings, 88, 89  
 — sinking, 78–86  
 Shafts, deep, 85, 86; downcast, 16, 86, 87; pumping, 80, 120; upcast, 16, 86, 87; ventilating, 80; winding, 80, 86, 128  
 Shallow Seam, 119  
 Sheffield, 24  
 Shropshire, 3, 20, 24, 27, 32, 35, 45, 61, 64  
 Side of work, 106, 107  
 Signals, 130  
 Silurian rocks, 43, 45, 46  
 Single-road Stall, 95  
 Sinking of shafts, 78–86  
 Slants, 78, 79  
 Slide-fault, 66  
 Slips, 78  
 Slopes, 78  
 Slyne, 69  
 Smeaton, John, 22  
 Smelting of bronze, 3; of iron, 3, 9–11, 16, 20, 23, 24, 27  
 Smith, Andrew, 34  
 Smith-work, 3–6, 10  
 Smithy Seam, 55, 56  
 Smut, 56, 71  
 Soughs, 8, 119  
 Spedding, Carlisle, 21, 26  
 Splitting the air, 30, 117  
 Springs, ferruginous, 72; surface-, 85  
 Square-work, 96, 106–108  
 Staffordshire, 32; North, 46, 85, 86; South, 7, 15, 16, 19, 25, 35, 40, 45, 53, 54, 58, 61, 64, 80, 96, 105–108, 119, 121, 128, 135, 140  
 Staple-pit, 91, 93  
 State Geological Survey, 46, 70  
 State regulations, 33, 146–148  
 Statistics, 6, 11, 27, 143–145  
 Steam Coal, 37, 39, 57  
 Steam-engine, early, 23, 27, 28; modern, 35, 132  
 Steam-jet, 34  
 Steel-mill, 21, 29  
 Stentons, 88, 115, 116  
 Stephenson, George, 33; Robert, 28  
 Stewart, —, 34  
 Stife, 111  
*Stigmara*, 48, 57  
 Stink-damp, 112  
 Stone Coal, 39  
 Stone drifts, 91, 92, 116  
 Stone-head, 81  
 Stoop-and-Room, 95  
 Stourbridge, 45, 57  
 Strike, 67, 68  
 Sulphur in coal, 40, 41  
 Sump, 86, 120  
 Sun-and-planet mechanism, 23  
 Sunderland, 14, 31  
 Surface-arrangements, 133–135  
 Survey, State Geological, 46, 70  
 Surveying, geological, 69–71  
 Sussex, 12, 32  
 Sutherland, 41  
 Sweat-damp, 111  
 Sweden, 90  
 Swelly, 59  
 Symon Fault, 59, 60  
 Synclines, 62, 63  
 Ten-yard or Thick Seam, 25, 57, 58, 105, 106  
 Theophrastus, 2  
 Thick or Ten-yard Seam, 25, 57, 58, 105, 106  
 Thill, 57  
 Thornborough, John, 11  
 Timbering, 89, 90, 100, 101, 103, 107  
 Tippler, 133  
 Trammers, 124

- Trams, 124  
Trevithick, Richard, 28  
Trias rocks, 43, 45, 63, 64, 84  
Tubbing, 14, 24, 84, 85  
Tubs, 124  
Tynemouth, 5
- Underclay, 48, 50, 57, 65, 100  
Underground fires, 10, 11, 15, 16;  
  gob-fires, 105, 106, 111  
Underground haulage, 124-128  
  — water, 11, 12, 17, 118  
Uronium, 3
- Varieties of coal, 37-39, 51  
Ventilation, natural, 8, 13-15,  
  113; by fire-lamp, 16, 33; by  
  furnace, 29, 33, 34, 114; mod-  
  ern, 33, 34, 101, 109-118  
Vivian, Andrew, 28
- Wages, 142-144  
Wales, 32; North, 95; South,  
  32, 36, 39, 52-54, 72, 78, 95,  
  120, 137, 138  
Wall, 96, 103  
Wallsend, 30  
Walsall, 19, 135  
Warwickshire, 19, 55, 64, 95  
Wasbrough, Matthew, 23  
Washing of coal, 135  
Wash-out, 59  
Water, underground, 11, 12, 17,  
  118; winding of, 120
- Water-gates, 8  
Water-wheels, 13, 19, 22, 23  
Watt, James, 22, 23, 27, 28,  
  121  
Way-leave, 140  
Weathering of rocks, 53, 54  
Wednesbury, 16, 19, 135  
Wednesfield, 61  
Westminster, 36; Palace, 5  
White damp, 111  
Whitehaven, 21, 26  
Whole-working, 96-99  
Wicket system of working, 95  
Wigan, 38, frontispiece  
Wilkinson, J. J., 31  
Willenhall, 61  
Winding of coal 32, 34, 128-132;  
  of water, 120  
Winding-chains, 35  
Winding-engine, 35, 132  
Windsor Castle, 6  
Winlaton, 6  
Winning the coal, 77-94  
  — levels, 87-90  
Winsor, F. A., 27  
Worcestershire, 16, 57  
Working the coal, 95-109  
Wroxeter, 3  
Wyre Forest, 4
- Yorkshire, 56, 57, 64, 84, 96, 138,  
  143, 144  
Yorkshire coast, coals of, 41



# THE CAMBRIDGE MANUALS

## OF SCIENCE AND LITERATURE

Published by the Cambridge University Press under the general editorship of P. Giles, Litt.D., Master of Emmanuel College, and A. C. Seward, F.R.S., Professor of Botany in the University of Cambridge.

A series of handy volumes dealing with a wide range of subjects and bringing the results of modern research and intellectual activity within the reach both of the student and of the ordinary reader.

### HISTORY AND ARCHAEOLOGY

- 42 Ancient Assyria. By Rev. C. H. W. Johns, Litt.D.
- 51 Ancient Babylonia. By Rev. C. H. W. Johns, Litt.D.
- 40 A History of Civilization in Palestine. By Prof. R. A. S. Macalister, M.A., F.S.A.
- 78 The Peoples of India. By J. D. Anderson, M.A.
- 49 China and the Manchus. By Prof. H. A. Giles, LL.D.
- 79 The Evolution of New Japan. By Prof. J. H. Longford.
- 43 The Civilization of Ancient Mexico. By Lewis Spence.
- 60 The Vikings. By Prof. Allen Mawer, M.A.
- 24 New Zealand. By the Hon. Sir Robert Stout, K.C.M.G., LL.D., and J. Logan Stout, LL.B. (N.Z.).
- 85 Military History. By the Hon. J. W. Fortescue.
- 84 The Royal Navy. By John Leyland.
- 76 Naval Warfare. By J. R. Thursfield, M.A.
- 15 The Ground Plan of the English Parish Church. By A. Hamilton Thompson, M.A., F.S.A.

## HISTORY AND ARCHAEOLOGY (*continued*)

- 16 The Historical Growth of the English Parish Church. By  
A. Hamilton Thompson, M.A., F.S.A.  
68 English Monasteries. By A. H. Thompson, M.A., F.S.A.  
50 Brasses. By J. S. M. Ward, B.A., F.R.Hist.S.  
59 Ancient Stained and Painted Glass. By F. S. Eden.  
80 A Grammar of English Heraldry. By W. H. St J. Hope,  
Litt.D.

## ECONOMICS

- 70 Copartnership in Industry. By C. R. Fay, M.A.  
6 Cash and Credit. By D. A. Barker.  
67 The Theory of Money. By D. A. Barker.  
86 Economics and Syndicalism. By Prof. A. W. Kirkaldy.

## LITERARY HISTORY

- 8 The Early Religious Poetry of the Hebrews. By the Rev.  
E. G. King, D.D.  
21 The Early Religious Poetry of Persia. By the Rev. Prof.  
J. Hope Moulton, D.D., D.Theol. (Berlin).  
9 The History of the English Bible. By John Brown, D.D.  
12 English Dialects from the Eighth Century to the Present  
Day. By W. W. Skeat, Litt.D., D.C.L., F.B.A.  
22 King Arthur in History and Legend. By Prof. W. Lewis  
Jones, M.A.  
54 The Icelandic Sagas. By W. A. Craigie, LL.D.  
23 Greek Tragedy. By J. T. Sheppard, M.A.  
33 The Ballad in Literature. By T. F. Henderson.  
37 Goethe and the Twentieth Century. By Prof. J. G.  
Robertson, M.A., Ph.D.  
39 The Troubadours. By the Rev. H. J. Chaytor, M.A.  
66 Mysticism in English Literature. By Miss C. F. E.  
Spurgeon.

## PHILOSOPHY AND RELIGION

- 4 The Idea of God in Early Religions. By Dr F. B. Jevons.  
57 Comparative Religion. By Dr F. B. Jevons.  
69 Plato: Moral and Political Ideals. By Mrs J. Adam.  
26 The Moral Life and Moral Worth. By Prof. Sorley, Litt.D.  
3 The English Puritans. By John Brown, D.D.  
11 An Historical Account of the Rise and Development of  
Presbyterianism in Scotland. By the Rt Hon. the  
Lord Balfour of Burleigh, K.T., G.C.M.G.  
41 Methodism. By Rev. H. B. Workman, D.Lit.

## EDUCATION

- 38 Life in the Medieval University. By R. S. Rait, M.A.



## LAW

- 13 The Administration of Justice in Criminal Matters (in England and Wales). By G. Glover Alexander, M.A., LL.M.

## BIOLOGY

- 1 The Coming of Evolution. By Prof. J. W. Judd, C.B., F.R.S.
- 2 Heredity in the Light of Recent Research. By L. Doncaster, Sc.D.
- 25 Primitive Animals. By Geoffrey Smith, M.A.
- 73 The Life-story of Insects. By Prof. G. H. Carpenter.
- 48 The Individual in the Animal Kingdom. By J. S. Huxley, B.A.
- 27 Life in the Sea. By James Johnstone, B.Sc.
- 75 Pearls. By Prof. W. J. Dakin.
- 28 The Migration of Birds. By T. A. Coward.
- 36 Spiders. By C. Warburton, M.A.
- 61 Bees and Wasps. By O. H. Latter, M.A.
- 46 House Flies. By C. G. Hewitt, D.Sc.
- 32 Earthworms and their Allies. By F. E. Beddard, F.R.S.
- 74 The Flea. By H. Russell.
- 64 The Wanderings of Animals. By H. F. Gadow, F.R.S.

## ANTHROPOLOGY

- 20 The Wanderings of Peoples. By Dr A. C. Haddon, F.R.S.
- 29 Prehistoric Man. By Dr W. L. H. Duckworth.

## GEOLOGY

- 35 Rocks and their Origins. By Prof. Grenville A. J. Cole.
- 44 The Work of Rain and Rivers. By T. G. Bonney, Sc.D.
- 7 The Natural History of Coal. By Dr E. A. Newell Arber.
- 30 The Natural History of Clay. By Alfred B. Searle.
- 34 The Origin of Earthquakes. By C. Davison, Sc.D., F.G.S.
- 62 Submerged Forests. By Clement Reid, F.R.S.
- 72 The Fertility of the Soil. By E. J. Russell, D.Sc.

## BOTANY

- 5 Plant-Animals: a Study in Symbiosis. By Prof. F. W. Keeble.
- 10 Plant-Life on Land. By Prof. F. O. Bower, Sc.D., F.R.S.
- 19 Links with the Past in the Plant-World. By Prof. A. C. Seward, F.R.S.

## PHYSICS

- 52 The Earth. By Prof. J. H. Poynting, F.R.S.
- 53 The Atmosphere. By A. J. Berry, M.A.
- 81 The Sun. By Prof. R. A. Sampson, D.Sc., F.R.S.
- 65 Beyond the Atom. By John Cox, M.A.
- 55 The Physical Basis of Music. By A. Wood, M.A.
- 71 Natural Sources of Energy. By Prof. A. H. Gibson, D.Sc.

## PSYCHOLOGY

- 14 An Introduction to Experimental Psychology. By Dr C. S. Myers.
- 45 The Psychology of Insanity. By Bernard Hart, M.D.
- 77 The Beautiful. By Vernon Lee.

## INDUSTRIAL AND MECHANICAL SCIENCE

- 31 The Modern Locomotive. By C. Edgar Allen, A.M.I.Mech.E.
- 56 The Modern Warship. By E. L. Attwood.
- 17 Aerial Locomotion. By E. H. Harper, M.A., and Allan E. Ferguson, B.Sc.
- 18 Electricity in Locomotion. By A. G. Whyte, B.Sc.
- 63 Wireless Telegraphy. By Prof. C. L. Fortescue, M.A.
- 58 The Story of a Loaf of Bread. By Prof. T. B. Wood, M.A.
- 47 Brewing. By A. Chaston Chapman, F.I.C.
- 82 Coal-Mining. By T. C. Cantrill.
- 83 Leather. By Prof. H. R. Procter.

---

"A very valuable series of books which combine in a very happy way a popular presentation of scientific truth along with the accuracy of treatment which in such subjects is essential....In their general appearance, and in the quality of their binding, print, and paper, these volumes are perhaps the most satisfactory of all those which offer to the inquiring layman the hardly earned products of technical and specialist research."—*Spectator*

"A complete set of these manuals is as essential to the equipment of a good school as is an encyclopaedia....We can conceive no better series of handy books for ready reference than those represented by the Cambridge Manuals."—*School World*

Cambridge University Press  
C. F. Clay, Manager  
LONDON: Fetter Lane, E.C.  
EDINBURGH: 100 Princes Street



UNIVERSITY OF CALIFORNIA LIBRARY

THIS BOOK IS DUE ON THE LAST DATE  
STAMPED BELOW

DEC 28 1928

MAY 14 1927

16 Feb '63 TD

REC'D LD

MAR 7 1963

JUN 9 1952

REC. CIR. MAR 24 '75

MAY 09 1999

YB 15543

TN802

290478

C3

Cantrell

UNIVERSITY OF CALIFORNIA LIBRARY

